

Public-law institution jointly founded by the
federal states and the Federation

**European Technical Assessment Body
for construction products**



European Technical Assessment

**ETA-26/0316
of 24 July 2026**

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Trade name of the construction product

Product family
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment
contains

This European Technical Assessment is
issued in accordance with Article 95(4) of
Regulation (EU) 2024/3110, on the basis of

Deutsches Institut für Bautechnik

Permalast concrete screw SCREW BOLT-300

Fasteners for use in concrete for redundant non-structural
systems

Permalast GmbH
Hanns-Martin-Schleyer-Straße 33
47877 Willich
GERMANY

Plant 1, Germany

12 pages including 3 annexes which form an integral part
of this assessment

EAD 330747-00-0601

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 36(3) of Regulation (EU) No 2024/3110.

Specific Part

1 Technical description of the product

The Permalast concrete screw SCREW BOLT-300 is an anchor of size of 8, 10 and 12 mm made of galvanized steel or steel with zinc flake coating. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C3

3.2 Safety in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C1 and C2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C1 and C2
Durability	See Annex B1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330747-00-0601, the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 24 July 2026 by Deutsches Institut für Bautechnik


Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel


Product in installed condition

Permalast concrete screw SCREW BOLT-300

- Galvanized carbon steel
- Zinc flakes coated carbon steel



e.g. Permalast concrete screw SCREW BOLT-300 and fixture

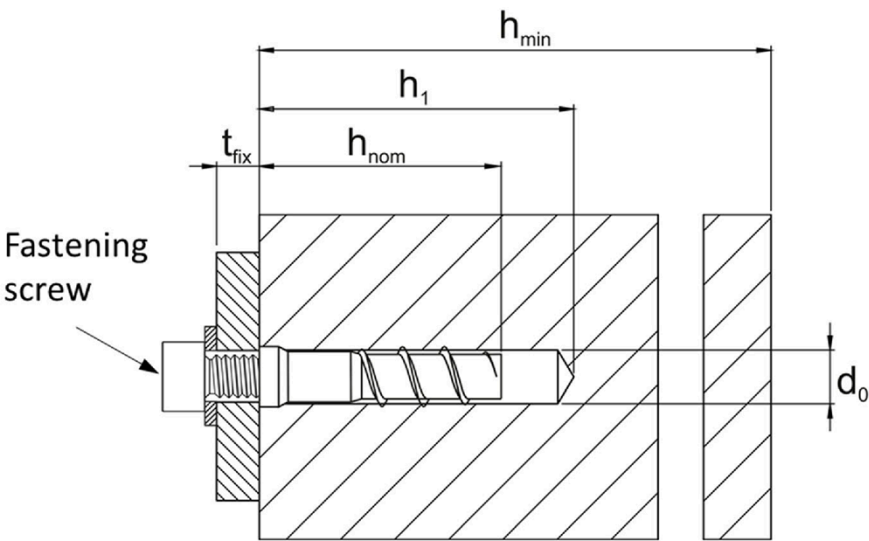


d_0 = nominal drill hole diameter
 t_{fix} = thickness of fixture
 h_1 = Bohrlochtiefe

h_{min} = minimum thickness of member
 h_{nom} = nominal embedment depth

Permalast concrete screw SCREW BOLT-300

Product description
Product in installed condition

Annex A1




Configuration with internal thread and TORX
e.g. SCREW BOLT-300

Table 1: Material

Part	Product name	Material		
all types	SCREW BOLT-300	- Steel EN 10263-4:2017 galvanized acc. to EN ISO 4042:2018 - Zinc flake coating according to EN ISO 10683:2018 ($\geq 5\mu\text{m}$)		
Part	Product name	Nominal characteristic steel		Rupture elongation A_5 [%]
		Yield strength f_{yk} [N/mm ²]	Ultimate strength f_{uk} [N/mm ²]	
all types	SCREW BOLT-300	540	700	≤ 8


Table 2: Dimensions

SCREW BOLT-300 Anchor size			8	10	12
Screw length	L	[mm]	40	40	40
Thread outer diameter	d_s	[mm]	10,5	12,5	14,5
Core diameter	d_k	[mm]	7,0	9,0	11,0

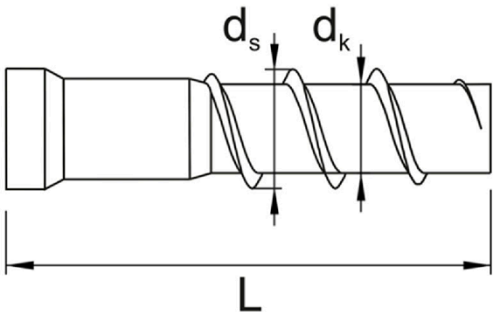

Marking:
SCREW BOLT-300

Screw type: TSM 8 M
Screw size: 8

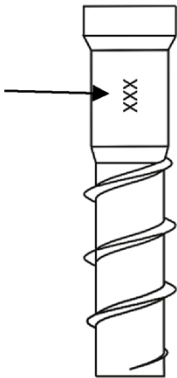

Permalast concrete screw SCREW BOLT-300

Product description
Screw types, material, dimensions and markings

Annex A2

Specification of Intended use

Anchorage subject to:

- Static or quasi-static actions
- Only for redundant non-structural systems (multiple use) according to EN 1992-4:2018
- Fire exposure

Base materials:

- Compacted reinforced and unreinforced concrete without fibers according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Cracked and uncracked concrete.

Use conditions (Environmental conditions):

- Concrete screws subject to dry internal conditions

Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed for static or quasi-static actions according to EN 1992-4:2018 and EOTA Technical Report TR 055, Edition February 2018.
- The design for shear load according to EN 1992-4:2018, Section 6.2.2 applies for all specified diameters d_f of clearance hole in the fixture in Annex B3, Table 4.

Installation:

- Hammer drilling or hollow drilling
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling must be drilled at a minimum distance of twice the depth of aborted hole or closer, if the aborted hole is filled with high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- After installation further turning of the anchor must not be possible. The head of the anchor is supported in the fixture and is not damaged. The concrete screw must be screwed in level with the concrete surface. The fixture is fastened by a fixing screw.

Permalast concrete screw SCREW BOLT-300

Intended use
Specification continuation

Annex B1

Table 3: Installation parameters

Fastening screws or threaded rods of strength classes 4.8, 5.8, 8.8 according to EN ISO 898-1:2013 may be used.

SCREW BOLT-300 concrete screw size			8	10	12
Nominal embedment depth	h_{nom}	[mm]	40	40	40
Nominal drill hole diameter	d_0	[mm]	8	10	12
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45	12,50
Drill hole depth	$h_1 \geq$	[mm]	50	50	50
Clearance hole diameter	d_f	[mm]	7	9	12
Diameter of the metric internal thread		[mm]	6	8	10
Minimum screw-in depth of the fixing screw or threaded rod		[mm]	8	10	12
Installation torque	T_{inst}	[Nm]	4	8	15
Torque impact screw driver		[Nm]	Max. torque according to manufacturer's instructions		
			180		

Table 4: Minimum thickness of member, minimum edge distance and minimum spacing

SCREW BOLT-300 concrete screw size			8	10	12
Nominal embedment depth	h_{nom}	[mm]	40	40	40
Minimum thickness of member	h_{min}	[mm]	80	80	80
Minimum edge distance	c_{min}	[mm]	40	40	40
Minimum spacing	s_{min}	[mm]	30	40	40





Permalast concrete screw SCREW BOLT-300

Intended use

Minimum thickness of member, minimum edge distance and minimum spacing

Annex B2

Installation Instructions

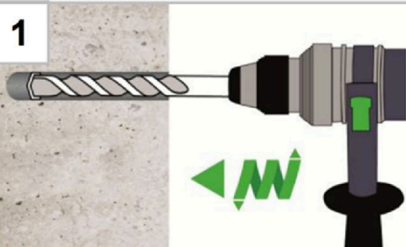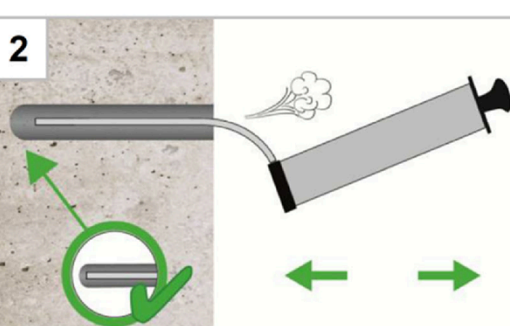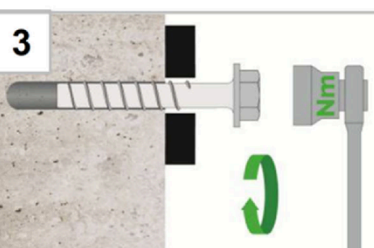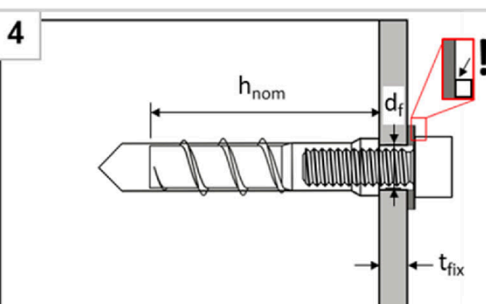1 	Create hammer drilled or hollow drilled borehole
2 	Remove drill dust by vacuuming or blowing of
3 	Install with torque impact screw driver or torque wrench
4 	The screw must be screwed in to below the concrete surface. The attachment part is fastened with the fastening screw.

Note:

Cleaning of borehole is not necessary when using a hollow drill

Permalast concrete screw SCREW BOLT-300

Intended use
Installation instructions

Annex B3

Table 5: Steel failure for tension and shear loading

SCREW BOLT-300 concrete screw size			8	10	12
Nominal embedment depth	h_{nom}	[mm]	40	40	40

Characteristic resistance with metric thread of strength class 4.8

Characteristic resistance	$N_{Rk,s}$	[kN]	4,8	6,4	7,9
Partial factor	$\gamma_{Ms,N}$	[-]	1,5		
Characteristic resistance	$V_{Rk,s}$	[kN]	4,0	7,3	9,0
Partial factor	$\gamma_{Ms,V}$	[-]	1,25		
Ductility factor	k_7	[-]	0,8		
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	5,0	12,5	23,9

Characteristic resistance with metric thread of strength class 5.8

Characteristic resistance	$N_{Rk,s}$	[kN]	4,8	6,4	7,9
Partial factor	$\gamma_{Ms,N}$	[-]	1,5		
Characteristic resistance	$V_{Rk,s}$	[kN]	5,0	7,5	9,0
Partial factor	$\gamma_{Ms,V}$	[-]	1,25		
Ductility factor	k_7	[-]	0,8		
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	6,3	15,4	23,9

Characteristic resistance with metric thread of strength class 8.8

Characteristic resistance	$N_{Rk,s}$	[kN]	4,8	6,4	7,9
Partial factor	$\gamma_{Ms,N}$	[-]	1,5		
Characteristic resistance	$V_{Rk,s}$	[kN]	4,0	7,5	9,0
Partial factor	$\gamma_{Ms,V}$	[-]	1,25		
Ductility factor	k_7	[-]	0,8		
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	8,8	15,4	23,9

Permalast concrete screw SCREW BOLT-300

Performances

Characteristic values - steel failure

Annex C1

Table 6: Characteristic values for static and quasi-static loading

SCREW BOLT-300 concrete screw size			8	10	12	
Nominal embedment depth	h_{nom}	[mm]	40	40	40	
Pull-out failure in uncracked concrete						
Characteristic resistance in C20/25		$N_{Rk,p}$	[kN]	6,5	8,0	5,5
Increasing factor for $N_{Rk,p} = N_{Rk,p (C20/25)} \cdot \psi_c$ with $\psi_c = \left(\frac{f_{ck}}{20}\right)^m$	C25/30	m	[-]	0,213	0,146	0,147
	C30/37					
	C40/50					
	C50/60					
Pull-out failure in cracked concrete						
Characteristic resistance in C20/25		$N_{Rk,p}$	[kN]	5,5	6,5	4,5
Increasing factor for $N_{Rk,p} = N_{Rk,p (C20/25)} \cdot \psi_c$ with $\psi_c = \left(\frac{f_{ck}}{20}\right)^m$	C25/30	m	[-]	0,209	0,121	0,281
	C30/37					
	C40/50					
	C50/60					
Concrete failure: Splitting failure, concrete cone failure and pry-out failure						
Effective embedment depth		h_{ef}	[mm]	31	31	30
k-Faktor	cracked	k_{cr}	[-]	7,7		
	uncracked	k_{ucr}	[-]	11,0		
Concrete cone failure	spacing	$s_{cr,N}$	[mm]	3,0 x h_{ef}		
	edge distance	$c_{cr,N}$	[mm]	1,5 x h_{ef}		
Splitting failure	resistance	$N^0_{Rk,Sp}$	[kN]	6,5	8,0	5,5
	spacing	$s_{cr,Sp}$	[mm]	≥ 200 mm and ≥ 4 x h_{ef}		
	edge distance	$c_{cr,Sp}$	[mm]	≥ 100 mm and ≥ 3 x h_{ef}		
Factor for pry-out failure	k_8	[-]		1,0		
Installation factor		γ_{inst}	[-]	1,0	1,0	1,2
Concrete edge failure						
Effective length in concrete		$l_f = h_{nom}$	[mm]	40	40	40
Nominal outer diameter of screw		d_{nom}	[mm]	8	10	12

Permalast concrete screw SCREW BOLT-300

Performances

Characteristic values - concrete failure

Annex C2

Table 7: Fire exposure – characteristic values of resistance

SCREW BOLT-300 concrete screw size				8	10	12
Nominal embedment depth		h_{nom}	[mm]	40	40	40
Steel failure for tension and shear load						
Characteristic resistance	R30	$N_{Rk,s,fi30}$	[kN]	1,01	2,11	3,92
	R60	$N_{Rk,s,fi60}$	[kN]	0,747	1,58	2,86
	R90	$N_{Rk,s,fi90}$	[kN]	0,54	1,05	1,81
	R120	$N_{Rk,s,fi120}$	[kN]	0,43	0,79	1,28
	R30	$V_{Rk,s,fi30}$	[kN]	1,01	2,11	3,92
	R60	$V_{Rk,s,fi60}$	[kN]	0,77	1,58	2,86
	R90	$V_{Rk,s,fi90}$	[kN]	0,54	1,05	1,81
	R120	$V_{Rk,s,fi120}$	[kN]	0,43	0,79	1,28
	R30	$M^0_{Rk,s,fi30}$	[Nm]	0,63	1,81	4,28
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,49	1,36	3,12
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,34	0,91	1,97
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,27	0,68	1,39
Pull-out failure						
Characteristic resistance	R30-R90	$N_{Rk,p,fi}$	[kN]	1,38	1,63	1,13
	R120	$N_{Rk,p,fi}$	[kN]	1,10	1,30	0,90
Concrete cone failure						
Characteristic resistance	R30-R90	$N^0_{Rk,c,fi}$	[kN]	0,9	0,9	0,8
	R120	$N^0_{Rk,c,fi}$	[kN]	0,7	0,7	0,7
Edge distance						
R30 - R120		$c_{cr,fi}$	[mm]	$2 \times h_{ef}$		
In case of fire attack from more than one side, the minimum edge distance shall be $\geq 300\text{mm}$.						
Spacing						
R30 - R120		$s_{cr,fi}$	[mm]	$4 \times h_{ef}$		
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.						

Permalast concrete screw SCREW BOLT-300

Performances

Fire exposure – characteristic values of resistance

Annex C3