Deutsches Institut für Bautechnik

Member of EOTA
www.eota.eu

Approval body for construction products and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and Laender Governments

Designated according to Article 29 of Regulation (EU) No 305/2011 and member of EOTA (European Organisation for Technical Assessment)

European Technical Assessment

ETA-19/0130 of 13 March 2019

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:	Deutsches Institut für Bautechnik
Trade name of the construction product	B+BTec Injection system BIS-HY GEN2 for rebar connection
Product family to which the construction product belongs	Systems for post-installed rebar connections with mortar
Manufacturer	B+BTec Munterij 8 4762 AH ZEVENBERGEN NIEDERLANDE
Manufacturing plant	B+BTec Plant 1
This European Technical Assessment contains	21 pages including 3 annexes which form an integral part of this assessment
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of	EAD 330087-00-0601

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "B+BTec Injection system BIS-HY GEN2 for rebar connection" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars made of steel with a diameter ϕ from 8 to 32 mm or the tension anchor ZA from sizes M12 to M24 according to Annex A and injection mortar BIS-HY GEN2 are used for rebar connections. The rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between rebar, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connection of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static and quasi-static loading	See Annex C 1

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 2 and C 3

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330087-00-0601, the applicable European legal act is: [96/582/EC].

The system(s) to be applied is (are): 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 13 March 2019 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Baderschneider

Deutsches Institut für Bautechnik DIBt

Installation post installed rebar

Figure A1: Overlapping joint for rebar connections of slabs and beams

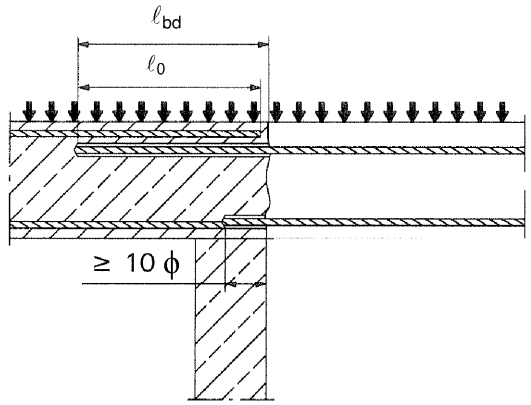

Figure A2: Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension

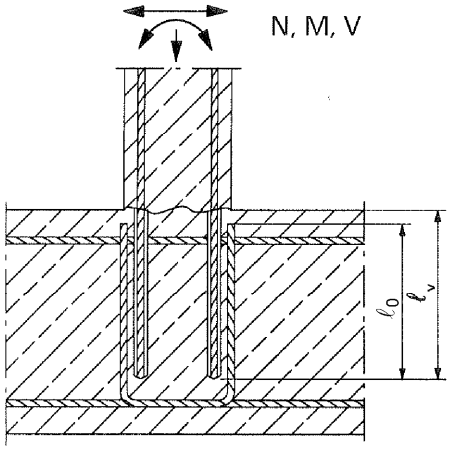

Figure A3: End anchoring of slabs or beams

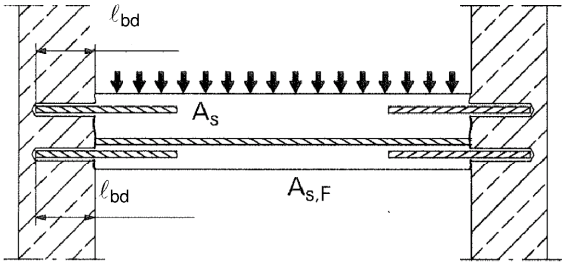

Figure A4: Rebar connection for components stressed primarily in compression. The rebars sre stressed in compression

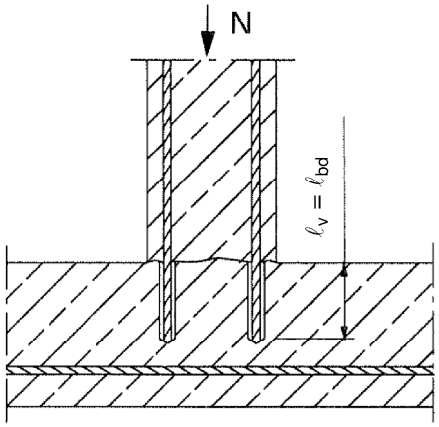

Figure A5: Anchoring of reinforcement to cover the line of acting tensile force

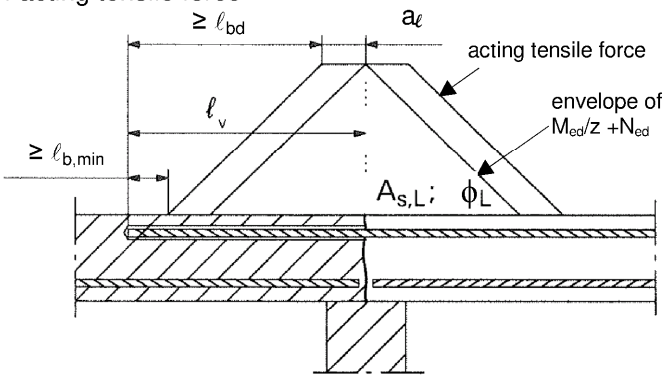

Note to Figure A1 to A5:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex A 1**
Product description Installed condition and examples of use for rebars	

Deutsches Institut für Bautechnik DIBt

Installation tension anchor ZA

Figure A6: Overlapping joint of a column stressed in bending to a foundation

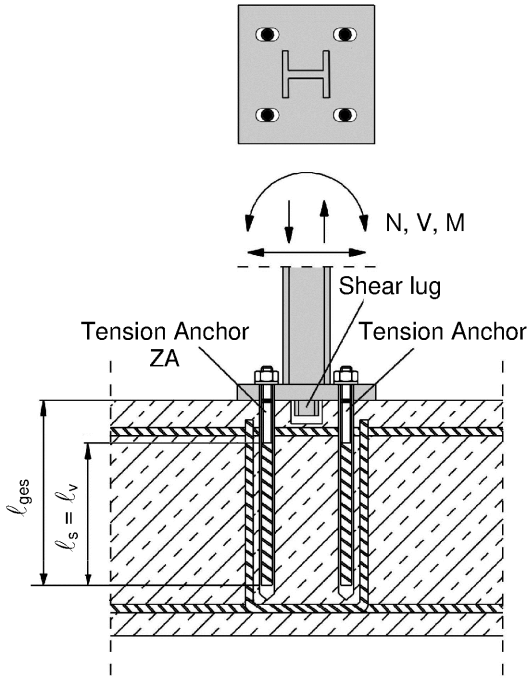

Figure A7: Overlap joint for the anchorage of barrier posts

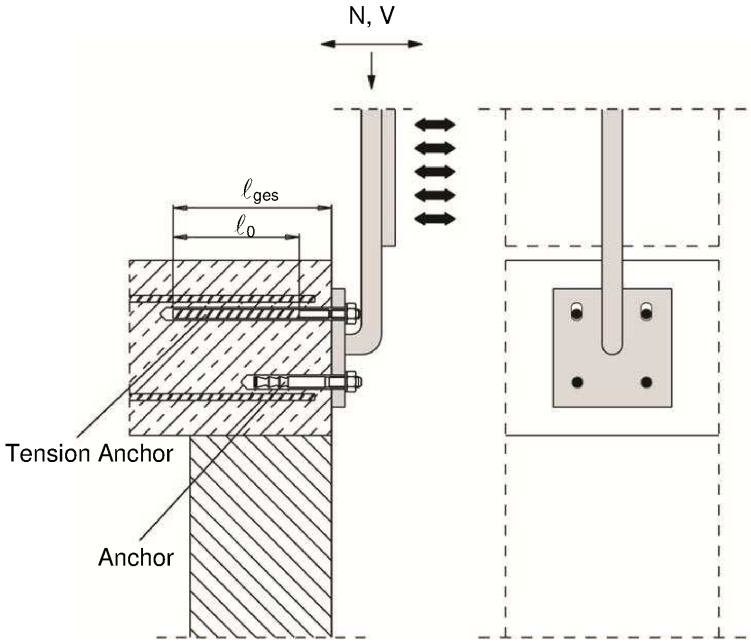

Figure A8: Overlap joint for the anchorage to centilever members

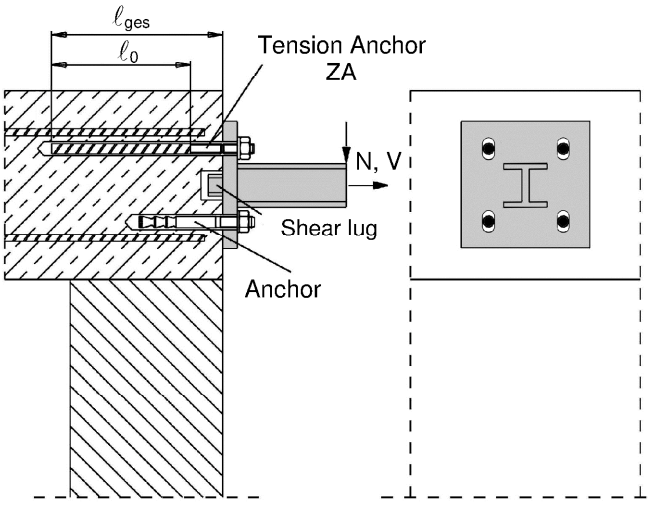

Note to Figure A6 to A8:

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2002+AC:2010

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex A 2**
Product description Installed condition and examples of use for tension anchors ZA	

Deutsches Institut für Bautechnik DIBt

B+BTec Injection System BIS-HY GEN2:

Injection mortar: BIS-HY GEN2
Typ "coaxial": 150 ml, 280 ml,
300 ml up to 333 ml and
380 ml up to 420 ml cartridge

Type "side-by-side":
235 ml, 345 ml and 825 ml
cartridge

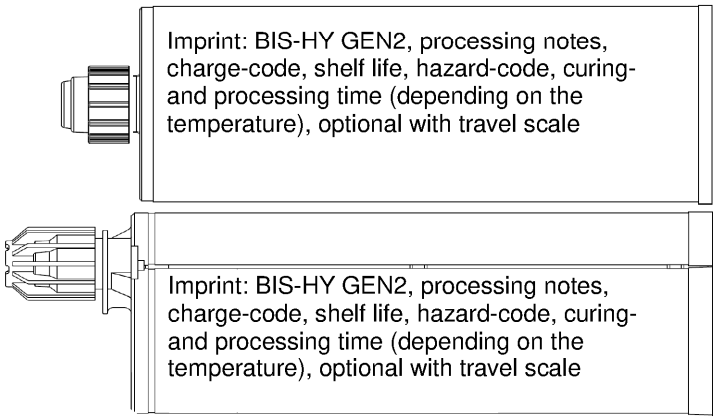

Static Mixer



Piston plug and mixer extension



Reinforcing bar (rebar): ø8 to ø32



Tension Anchor ZA: M12 to M24



B+BTec Injection System BIS-HY GEN2 for rebar connection	Annex A 3
Product description Injection mortar / Static mixer / Rebar / Tension Anchor ZA	

Deutsches Institut für Bautechnik DIBt

Reinforcing bar (rebar): ø8, ø10, ø12, ø14, ø16, ø20, ø22, ø24, ø25, ø28, ø32



- Minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range $0{,}05\phi \le h \le 0{,}07\phi$
  (ϕ: Nominal diameter of the bar; h: Rip height of the bar)

Table A1: Materials

Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

Deutsches Institut für Bautechnik DIBt

Tension Anchor ZA: M12, M16, M20, M24

Marking: e.g. ◇ ZA 12 A4

◇	Mark of the producer
ZA	Trade name
12	Rod diameter/thread
A4	for stainless steel A4
HCR	for high corrosion resistance steel

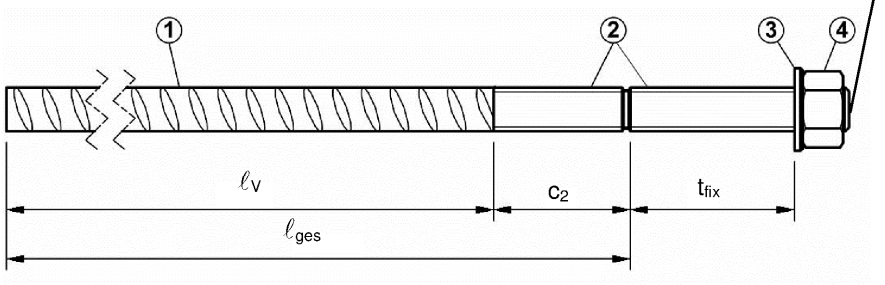

Table A2: Materials

Part	Designation	Material											
		ZA vz				ZA A4				ZA HCR			
		M12	M16	M20	M24	M12	M16	M20	M24	M12	M16	M20	M24
1	Reinforcement bar	Class B according to NDP or NCL of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$											
2	Threaded rod	Steel, zinc plated according to EN 10087:1998 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014			
	f_{yk} [N/mm²]	640				640			560	640			560
3	Washer	Steel, zinc plated according to EN 10087:1998 or EN 10263:2001				Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2014				High corrosion resistant steel, 1.4529, 1.4565, EN 10088-1:2014			
4	Nut												

Table A3: Dimensions and installation parameter

Size				ZA-M12	ZA-M16	ZA-M20	ZA-M24
Diameter of threaded rod			[mm]	12	16	20	24
Diameter of reinforcement bar			[mm]	12	16	20	25
Drill hole diameter			[mm]	16	20	25	32
Diameter of clearance hole in fixture			[mm]	14	18	22	26
With across nut flats		SW	[mm]	19	24	30	36
Stress area		A_s	[mm²]	84	157	245	353
Effective embedment depth		ℓ_v	[mm]	according to static calculation			
Length of bonded thread	plated	c_2	[mm]	≥ 20	≥ 20	≥ 20	≥ 20
	A4/HCR			≥ 100	≥ 100	≥ 100	≥ 100
Minimum thickness of fixture		t_{fix}	[mm]	5	5	5	5
Maximum thickness of fixture		t_{fix}	[mm]	3000	3000	3000	3000
Maximum installation torque		T_{max}	[Nm]	50	100	150	150

B+BTec Injection System BIS-HY GEN2 for rebar connection

Product description
Specifications Tension Anchor ZA

Annex A 5

Deutsches Institut für Bautechnik DIBt

Specifications of intended use

Anchorages subject to:

- Static and quasi-static loads.
- Fire exposure

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C50/60 according to EN 206-1:2000.
- Maximum chloride concrete of 0,40% (CL 0.40) related to the cement content according to EN 206-1:2000.
- Non-carbonated concrete.

  Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of ϕ + 60 mm prior to the installation of the new rebar.

  The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010.

  The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

Temperature Range:

- - 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions or subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist
  (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist
  (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010, EN 1992-1-2:2004+AC:2008 and Annex B 2 and B 3.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

Installation:

- Dry or wet concrete.
- It must not be installed in flooded holes.
- Overhead installation allowed.
- Hole drilling by hammer drill (HD) hollow drill (HDB) or compressed air drill mode (CD).
- The installation of post-installed rebar resp. tension anchors shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex B 1**
Intended use Specifications	

Deutsches Institut für Bautechnik DIBt

Figure B1: General construction rules for post-installed rebars

- Only tension forces in the axis of the rebar may be transmitted
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

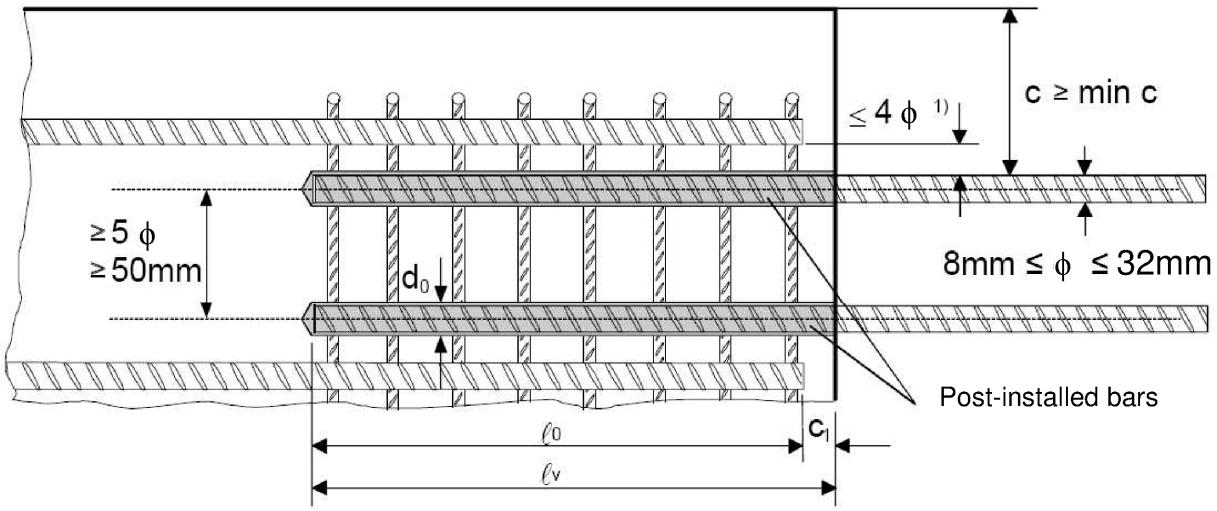

1) If the clear distance between lapped bars exceeds 4ϕ, then the lap length shall be increased by the difference between the clear bar distance and 4ϕ.

The following applies to Figure B1:

c	concrete cover of post-installed rebar
c_1	concrete cover at end-face of existing rebar
min c	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	diameter of post-installed rebar
ℓ_0	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
ℓ_v	effective embedment depth, ≥ $\ell_0 + c_1$
d_0	nominal drill bit diameter, see Annex B 6

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex B 2**
Intended use General construction rules for post-installed rebars	

Figure B2: General construction rules for tension anchors ZA

- The length of the bonded-in thread may be not be accounted as anchorage
- Only tension forces in the direction of the bar axis may be transmitted by the tension anchor ZA
- The tension force must be transferred via an overlap joint to the reinforcement in the building part.
- The transfer of shear forces shall be ensured by appropriate additional measures, e.g shear lugs or by anchors with an European technical assessment.
- In the anchor plate, the holes for the tension anchors shall be executed as elongated holes with axis in the direction of the shear force.

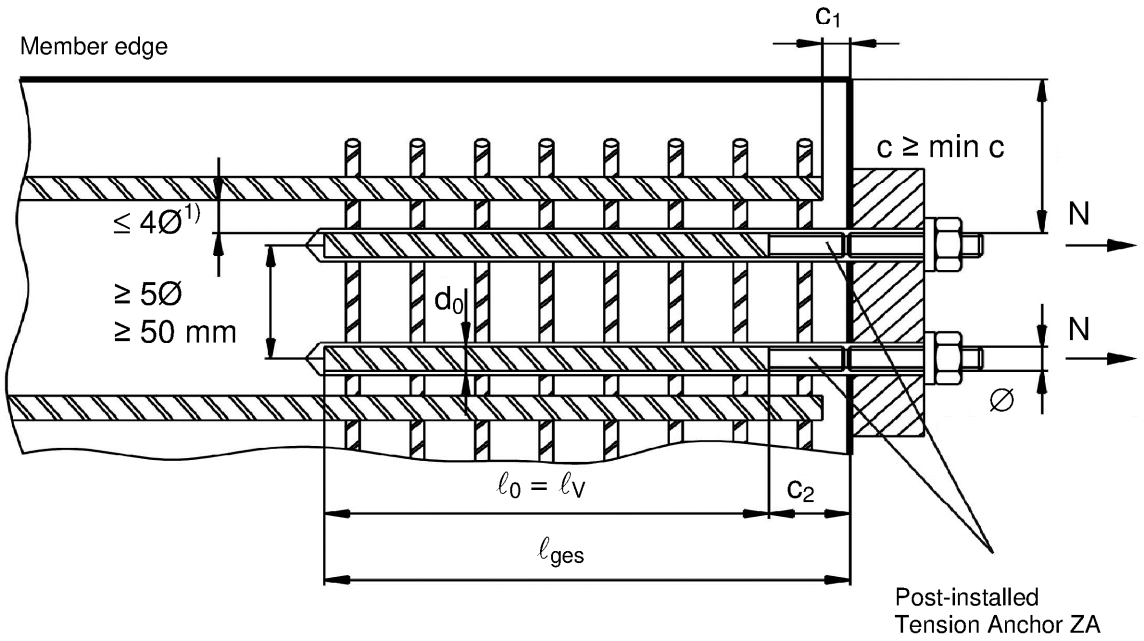

1) If the clear distance between lapped bars exceeds 4ϕ, then the lap length shall be increased by the difference between the clear bar distance and 4ϕ.

The following applies to Figure B2:

c	concrete cover of tension anchor ZA
c_1	concrete cover at end-face of existing rebar
c_2	Length of bonded thread
min c	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	diameter of tension anchor
ℓ_0	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
ℓ_v	effective embedment depth, ≥ $\ell_0 + c_1$
ℓ_{ges}	overall embedment depth, ≥ $\ell_0 + c_2$
d_0	nominal drill bit diameter, see Annex B 6

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex B 3**
Intended use General construction rules for tension anchors	

Deutsches Institut für Bautechnik DIBt

Table B1: Minimum concrete cover min c[1] of post-installed rebar and tension anchor ZA depending of drilling method



Drilling method	Rebar diameter	Without drilling aid	With drilling aid
Hammer drilling (HD) Hollow drill bit system (HDB)	< 25 mm	30 mm + 0,06 · ℓ_v ≥ 2 ϕ	30 mm + 0,02 · ℓ_v ≥ 2 ϕ
	≥ 25 mm	40 mm + 0,06 · ℓ_v ≥ 2 ϕ	40 mm + 0,02 · ℓ_v ≥ 2 ϕ
Compressed air drilling (CD)	< 25 mm	50 mm + 0,08 · ℓ_v	50 mm + 0,02 · ℓ_v
	≥ 25 mm	60 mm + 0,08 · ℓ_v	60 mm + 0,02 · ℓ_v

[1] see Annex B2, Figures B1 and Annex B3, Figure B2
Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed

Table B2: maximum embedment depth $\ell_{v,max}$

Rebar ϕ	Tension anchor ϕ	$\ell_{v,max}$ [mm]
8 mm		1000
10 mm		1000
12 mm	ZA-M12	1000[1] / 1200
14 mm		1000[1] / 1400
16 mm	ZA-M16	1000[1] / 1600
20 mm	ZA-M20	1000[1] / 2000
22 mm		1000[1] / 2000
24 mm		1000[1] / 2000
25 mm	ZA-M24	1000[1] / 2000
28 mm		1000[1] / 2000
32 mm		1000[1] / 2000

[1] maximum embedment depth for use with hollow drill bit system (HDB)

Table B3: Base material temperature, gelling time and curing time

Concrete temperature	Gelling working time[1]	Minimum curing time in dry concrete	Minimum curing time in wet concrete
- 5 °C to - 1 °C	50 min	5 h	10 h
0 °C to + 4 °C	25 min	3,5 h	7 h
+ 5 °C to + 9 °C	15 min	2 h	4 h
+ 10 °C to + 14 °C	10 min	1 h	2 h
+ 15 °C to + 19 °C	6 min	40 min	60 min
+ 20 °C to + 29 °C	3 min	30 min	60 min
+ 30 °C to + 40 °C	2 min	30 min	60 min
Cartridge temperature	+5°C to +40°C		

[1] t_{gel}: maximum time from starting of mortar injection to completing of rebar setting.

B+BTec Injection System BIS-HY GEN2 for rebar connection

Intended use
Minimum concrete cover, maximum embedment depth, working time and curing times

Annex B 4

Deutsches Institut für Bautechnik DIBt

Table B4: Dispensing tools

Cartridge type/size	Hand tool		Pneumatic tool
Coaxial cartridges 150, 280, 300 up to 333 ml	 **e.g. Type H 297 or H244C**		 **e.g. Type TS 492 X**
Coaxial cartridges 380 up to 420 ml	 e.g. Type CCM 380/10	 e.g. Type H 285 or H244C	 e.g. Type TS 485 LX
Side-by-side cartridges 235, 345 ml	 e.g. Type CBM 330A	 e.g. Type H 260	 e.g. Type TS 477 LX
Side-by-side cartridge 825 ml	-	-	 e.g. Type TS 498X

All cartridges could also be extruded by a battery tool.

Cleaning and installation tools

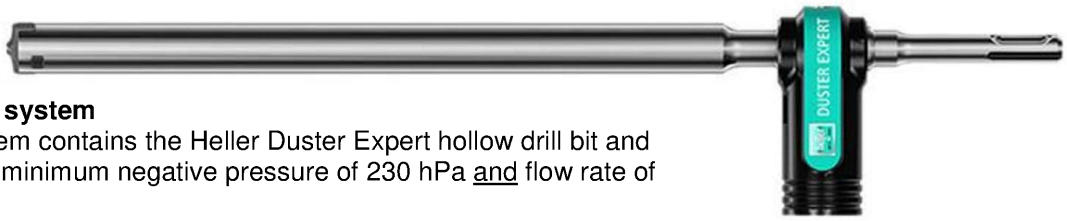

HDB – Hollow drill bit system
The hollow drill bit system contains the Heller Duster Expert hollow drill bit and a class M vacuum with minimum negative pressure of 230 hPa and flow rate of minimum 61l/s.

Brush RB:



SDS Plus Adapter:

Brush extension:

Hand pump (volume 750 ml)



Rec. compressed air tool hand slide valve (min 6 bar)

B+BTec Injection System BIS-HY GEN2 for rebar connection

Intended Use
Dispensing, cleaning and installation tools

Annex B 5

Deutsches Institut für Bautechnik DIBt

Table B5: Brushes, piston plugs, max anchorage depth and mixer extension, hammer (HD) and compressed air (CD) drilling

Bar size ϕ	Tension anchor ϕ	Drill bit - ∅		d_b Brush - ∅		$d_{b,min}$ min. Brush - ∅	Piston plug	Cartridge: All sizes				Cartridge: side-by-side (825 ml)	
								Hand or battery tool		Pneumatic tool		Pneumatic tool	
		HD	CD					$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension
[mm]	[mm]	[mm]			[mm]	[mm]		[mm]		[mm]		[mm]	
8		12	-	RB12	13,5	12,5	-	700	VL10/0,75	800	VL10/0,75	800	VL10/0,75
10		14	-	RB14	15,5	14,5	VS14			1000		1000	
12	ZA-M12	16		RB16	17,5	16,5	VS16			1000		1200	VL16/1,8
14		18		RB18	20,0	18,5	VS18					1400	
16	ZA-M16	20		RB20	22,0	20,5	VS20					1600	
20	ZA-M20	25	-	RB25	27,0	25,5	VS25	500		700		2000	
		-	26	RB26	28,0	26,5	VS25						
22		28		RB28	30,0	28,5	VS28			500			
24		32		RB32	34,0	32,5	VS32						
25	ZA-M24	32		RB32	34,0	32,5	VS32						
28		35		RB35	37,0	35,5	VS35					2000	
32		40		RB40	43,5	40,5	VS40						

Table B6: Brushes, piston plugs, max anchorage depth and mixer extension, hammer drilling with hollow drill bit system (HDB)

Bar size ϕ	Tension anchor ϕ	Drill bit - ∅	d_b Brush - ∅	$d_{b,min}$ min. Brush - ∅	Piston plug	Cartridge: All sizes				Cartridge: side-by-side (825 ml)	
						Hand or battery tool		Pneumatic tool		Pneumatic tool	
		HDB				$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension	$l_{v,max}$	Mixer extension
[mm]	[mm]	[mm]				[mm]		[mm]		[mm]	
8		12	No cleaning required		-	700	VL10/0,75	800	VL10/0,75	800	VL10/0,75
10		14			VS14			1000		1000	
12	ZA-M12	16			VS16					1000	VL16/1,8
14		18			VS18					1000	
16	ZA-M16	20			VS20					1000	
20	ZA-M20	25			VS25	500		700		1000	
22		28			VS28						
24		32			VS32			500			
25	ZA-M24	32			VS32						
28		35			VS35					1000	
32		40			VS40						

B+BTec Injection System BIS-HY GEN2 for rebar connection

Intended Use
Parameter brushes, piston plugs, max anchorage depth and mixer extension

Annex B 6

Deutsches Institut für Bautechnik DIBt

A) Bore hole drilling

Note: Before drilling, remove carbonated concrete and clean contact areas (see Annex B1)
In case of aborted drill hole: the drill hole shall be filled with mortar.



1a. **Hammer (HD) or compressed air drilling (CD)**
Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar with carbide hammer drill (HD) or a compressed air drill (CD). Proceed with Step 2.



Hammer drill (HD + HDB)



1b. **Hollow drill bit system (HDB) (see Annex B 5)**
Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar. This drilling system removes the dust and cleans the bore hole during drilling. Proceed with Step 3.



Compressed air drill (CD)

B) Bore hole cleaning

MAC: Cleaning for bore hole diameter $d_0 \leq 20$mm and bore hole depth $h_0 \leq 10d_s$



2a. Starting from the bottom or back of the bore hole, blow the hole clean a hand pump (Annex B 7) a minimum of four times.



2b. Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush > $d_{b,min}$ (Table B5) a minimum of four times in a twisting motion.
If the bore hole ground is not reached with the brush, a brush extension shall be used.



2c. Finally blow the hole clean again with a hand pump (Annex B 7) a minimum of four times.

CAC: Cleaning for all bore hole diameter and bore hole depth



2a. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.



2b. Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush > $d_{b,min}$ (Table B5) a minimum of two times.
If the bore hole ground is not reached with the brush, a brush extension shall be used (Table B5).



2c. Finally blow the hole clean again with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.

B+BTec Injection System BIS-HY GEN2 for rebar connection

Intended Use
Installation instruction

Annex B 7

Deutsches Institut für Bautechnik DIBt

C) Preparation of bar and cartridge



3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.
For every working interruption longer than the recommended working time (Table B3) as well as for every new cartridges, a new static-mixer shall be used.



3a. In case of using the mixer extension VL16/1,8, the tip of the mixer nozzle has to be cut off at position „X“.



4. Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar and insert bar in empty hole to verify hole and depth ℓ_v.
The reinforcing bar should be free of dirt, grease, oil or other foreign material.



5. Prior to dispensing into the anchor hole, squeeze out separately the mortar until it shows a consistent grey colour, but a minimum of three full strokes, and discard non-uniformly mixed adhesive components.

D) Filling the bore hole



6. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used.



For overhead and horizontal installation and bore holes deeper than 240 mm a piston plug and the appropriate mixer extension must be used.

Observe the gel-/ working times given in Table B3.

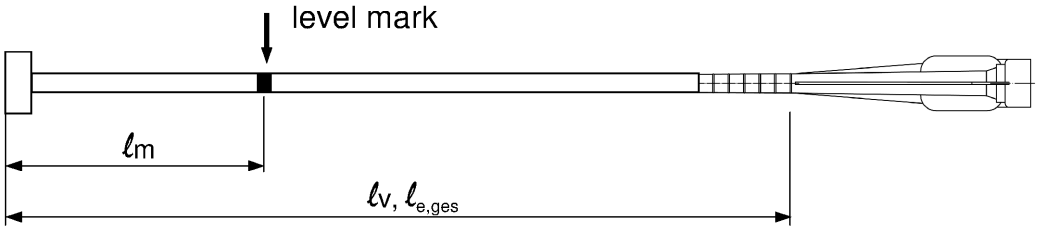

Injection tool must be marked by mortar level mark ℓ_m and anchorage depth ℓ_v resp. $\ell_{e,ges}$ with tape or marker.

Quick estimation: $\ell_m = 1/3 \cdot \ell_v$ Continue injection until the mortar level mark ℓ_m becomes visible.

Optimum mortar volume: $\ell_m = \ell_v$ resp. $\ell_{e,ges} \cdot \left(1{,}2 \cdot \frac{\phi^2}{d_0^2} - 0{,}2\right)$ [mm]

B+BTec Injection System BIS-HY GEN2 for rebar connection

Intended Use
Installation instruction

Annex B 8

Deutsches Institut für Bautechnik DIBt

E) Inserting the rebar



7. Push the reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

The bar should be free of dirt, grease, oil or other foreign material.



8. Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).



9. Observe gelling time t_{gel}. Attend that the gelling time can vary according to the base material temperature (see Table B3). It is not allowed to move the bar after geling time t_{gel} has elapsed.
Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured (attend Table B3). After full curing time $\mathbf{t_{cure}}$ has elapsed, the add-on part can be installed.

B+BTec Injection System BIS-HY GEN2 for rebar connection	Annex B 9
Intended Use Installation instruction	

Deutsches Institut für Bautechnik DIBt

Minimum anchorage length and minimum lap length

The minimum anchorage length $\ell_{b,min}$ and the minimum lap length $\ell_{0,min}$ according to EN 1992-1-1:2004+AC:2010 ($\ell_{b,min}$ acc. to Eq. 8.6 and Eq. 8.7 and $\ell_{0,min}$ acc. to Eq. 8.11) shall be multiply by the amplification factor α_{lb} according to Table C1.

Table C1: Amplification factor α_{lb} related to concrete class and drilling method

Concrete class	Drilling method	Bar size	Amplification factor α_{lb}
C12/15 to C50/60	All drilling method	8 mm to 32 mm ZA-M12 to ZA-M24	1,0

Table C2: Reduction factor k_b for all drilling methods

Rebar - Ø	Concrete class								
ϕ	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 32 mm ZA-M12 to ZA-M24	1,0								

Table C3: Design values of the ultimate bond stress $f_{bd,PIR}$ in N/mm² for all drilling methods and for good conditions

$f_{bd,PIR} = k_b \cdot f_{bd}$

with

f_{bd}: Design value of the ultimate bond stress in N/mm² considering the concrete classes and the rebar diameter according to EN 1992-1-1:2004+AC:2010.
(for all other bond conditions multiply the values by 0.7)

k_b: Reduction factor according to Table C2

Rebar - Ø	Concrete class								
ϕ	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 32 mm ZA-M12 to ZA-M24	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3

B+BTec Injection System BIS-HY GEN2 for rebar connection

Performances
Amplification factor α_{lb}
Design values of ultimate bond resistance $f_{bd,PIR}$

Annex C 1

Deutsches Institut für Bautechnik DIBt

Design value of the ultimate bond stress $f_{bd,fi}$ under fire exposure for concrete classes C12/15 to C50/60, (all drilling methods):

The design value of the bond stress $f_{bd,fi}$ under fire exposure has to be calculated by the following equation:

$$f_{bd,fi} = k_{fi}(\theta) \cdot f_{bd,PIR} \cdot \gamma_c / \gamma_{M,fi}$$

with: $\theta \leq 364°C$: $k_{fi}(\theta) = 30{,}34 \cdot e^{(\theta \cdot -0{,}011)} / (f_{bd,PIR} \cdot 4{,}3) \leq 1{,}0$

$\theta > 364°C$: $k_{fi}(\theta) = 0$

$f_{bd,fi}$	Design value of the ultimate bond stress in case of fire in N/mm²
θ	Temperature in °C in the mortar layer.
$k_{fi}(\theta)$	Reduction factor under fire exposure.
$f_{bd,PIR}$	Design value of the ultimate bond stress in N/mm² in cold condition according to Table C3 considering the concrete classes, the rebar diameter and the bond conditions according to EN 1992-1-1:2004+AC:2010.
γ_c	partially safety factor according to EN 1992-1-1:2004+AC:2010
$\gamma_{M,fi}$	partially safety factor according to EN 1992-1-2:2004+AC:2008

For evidence under fire exposure the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent ultimate bond stress $f_{bd,fi}$.

Example graph of Reduction factor $k_{fi}(\theta)$ for concrete classes C20/25 for good bond conditions:

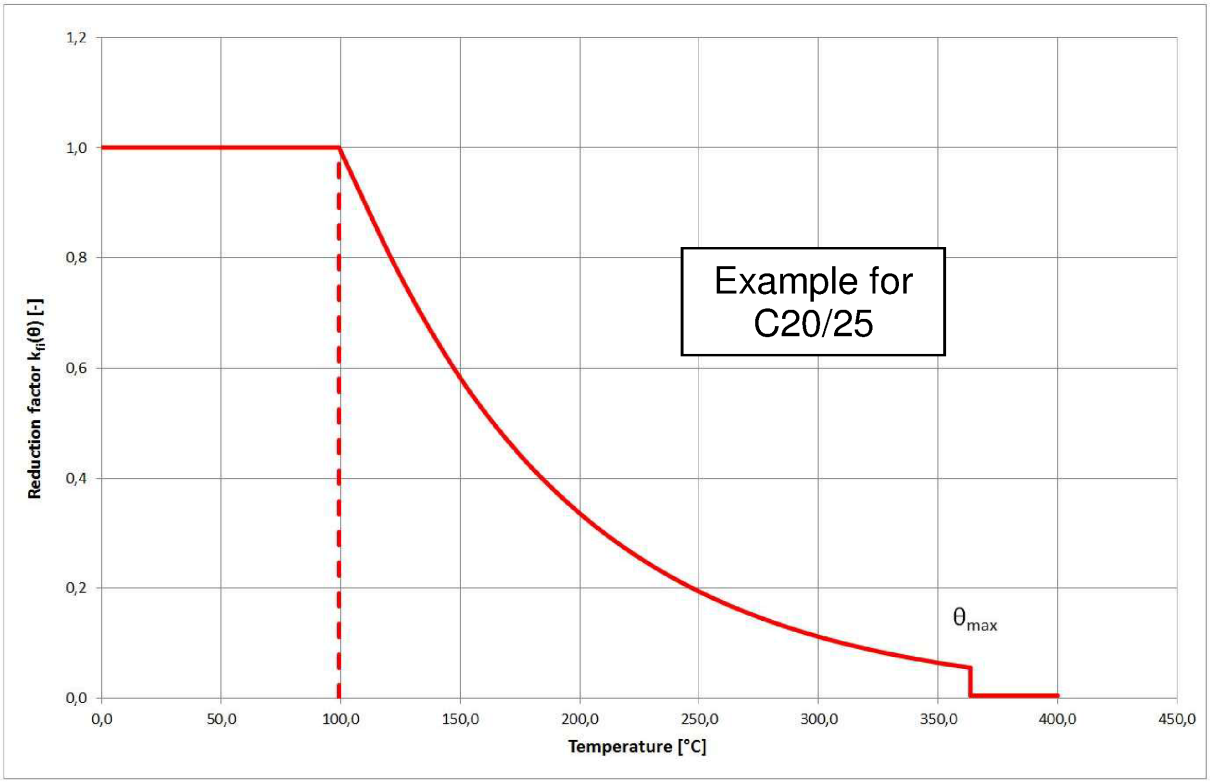

B+BTec Injection System BIS-HY GEN2 for rebar connection	**Annex C 2**
Performances Design value of bond strength $f_{bd,fi}$ under fire exposure	

Deutsches Institut für Bautechnik DIBt

Table C4: Characteristic tension strength for tension anchor ZA under fire exposure,
concrete classes C12/15 to C50/60, according to Technical Report TR 020

Tension Anchor				**M12**	**M16**	**M20**	**M24**
Steel, zinc plated (ZA vz)							
Characteristic steel strength	R30	$\sigma_{Rk,s,fi}$	[N/mm²]	20			
	R60			15			
	R90			13			
	R120			10			
Stainless Steel (ZA A4 or ZA HCR)							
Characteristic steel strength	R30	$\sigma_{Rk,s,fi}$	[N/mm²]	30			
	R60			25			
	R90			20			
	R120			16			

Design value of the steel strength $\sigma_{Rd,s,fi}$ under fire exposure

The design value of the steel strength $\sigma_{Rd,s,fi}$ under fire exposure has to be calculated by the following equation:

$$\sigma_{Rd,s,fi} = \sigma_{Rk,s,fi} / \gamma_{M,fi}$$

with:

$\sigma_{Rk,s,fi}$ characteristic steel strength according to Table C4
$\gamma_{M,fi}$ partially safety factor according to EN 1992-1-2:2004+AC:2008

B+BTec Injection System BIS-HY GEN2 for rebar connection

Performances
Design value of the steel strength $\sigma_{Rd,s,fi}$ for tension anchor ZA under fire exposure

Annex C 3