European Technical Assessment

ETA-11/0417
of 14 February 2022

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the European Technical Assessment:	Deutsches Institut für Bautechnik
Trade name of the construction product	Rebar connection with Upat Injection mortar UPM 55
Product family to which the construction product belongs	Systems for post-installed rebar connections with mortar
Manufacturer	Upat Vertriebs GmbH Bebelstraße 11 79108 Freiburg im Breisgau DEUTSCHLAND
Manufacturing plant	Upat
This European Technical Assessment contains	26 pages including 3 annexes which form an integral part of this assessment
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of	EAD 330087-01-0601, Edition 06/2021
This version replaces	ETA-11/0417 issued on 27 June 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The subject of this European technical assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "Rebar connection with Injection mortar UPM 55" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars with a diameter ϕ from 8 to 40 mm or the Upat rebar anchor FRA of sizes M12 to M24 according to Annex A and the injection mortar UPM 55 are used for the post-installed rebar connection. The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between embedded reinforcing bar, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the rebar connection is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connections of at least 50 and/or 100 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance under static and quasi-static loading	See Annex C 1 and C 2
Characteristic resistance under seismic action	See Annex B 5 and C 3

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 4 and C 5

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330087-01-0601, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5   Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 14 February 2022 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock   *beglaubigt:*
Head of Section   Baderschneider

Installation conditions and application examples reinforcing bars, part 1

Figure A1.1:
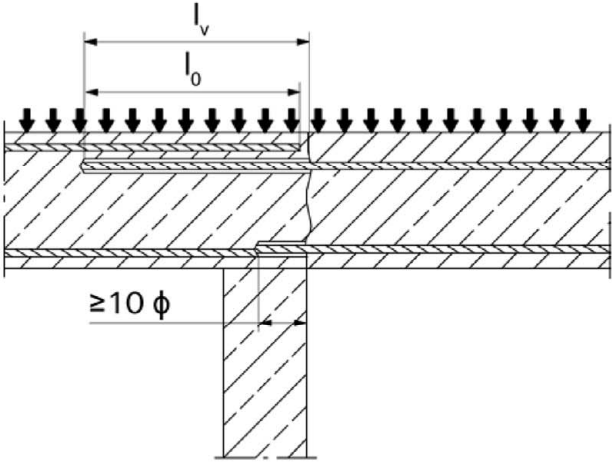Overlap joint with existing reinforcement for rebar connections of slabs and beams

l_v

l_0

$\geq 10\ \phi$

Figure A1.2:
Overlap joint with existing reinforcement at a foundation of a column or wall where the rebars are stressed

N, M, V

l_0 l_v

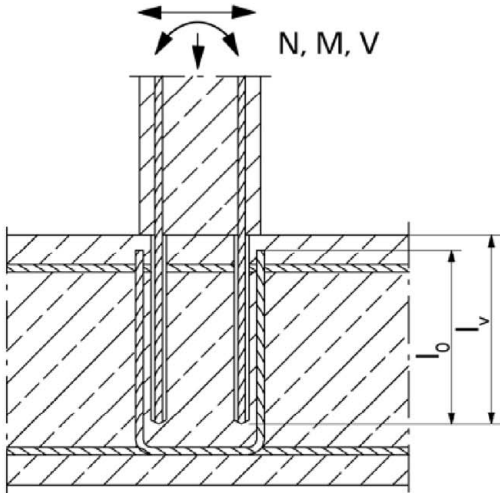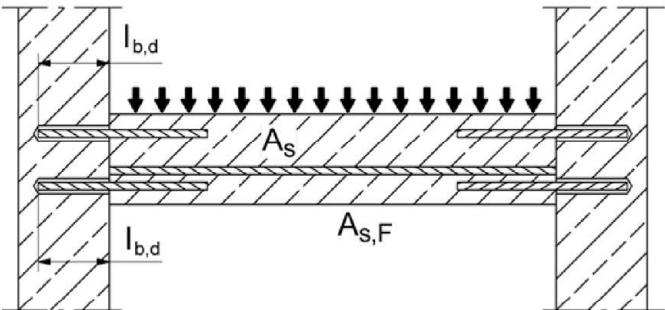**Figure A1.3:**
End anchoring of slabs or beams (e.g. designed as simply supported)

$l_{b,d}$

A_s

$A_{s,F}$

$l_{b,d}$

Figures not to scale

Rebar connection with Injection mortar UPM 55	
Product description Installation conditions and application examples reinforcing bars, part 1	**Annex A 1**

Installation conditions and application examples reinforcing bars, part 2

Figure A2.1:
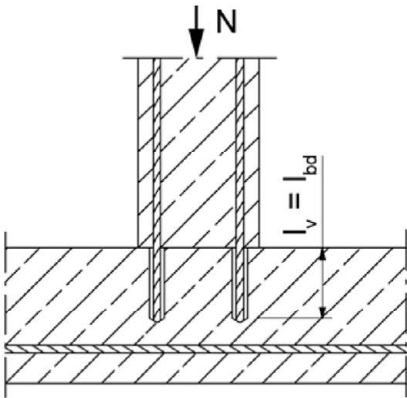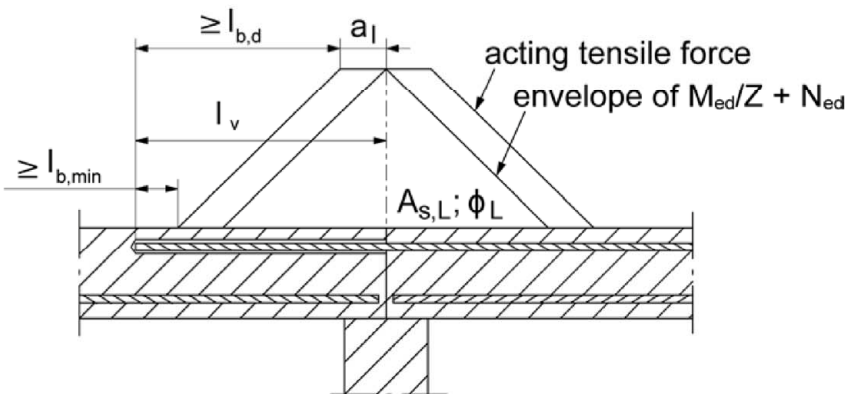Rebar connection for stressed primarily in compression

Figure A2.2:
Anchoring of reinforcement to cover the enveloped line of acting tensile force in the bending member

Note to **figure A1.1** to **A1.3** and **figure A2.1** to **A2.2**

In the figures no traverse reinforcement is plotted, the transverse reinforcement shall comply with
EN 1992-1-1: 2004+AC:2010.

Preparing of joints according to **Annex B 2**

Rebar connection with Injection mortar UPM 55	
Product description Installation conditions and application examples reinforcing bars, part 2	**Annex A 2**

Installation conditions and application examples Upat rebar anchor, part 3

Figure A3.1:

Lap to a foundation of a column under bending.

1. Shear lug (or fastener loaded in shear)
2. Upat Rebar tension anchor (tension only)
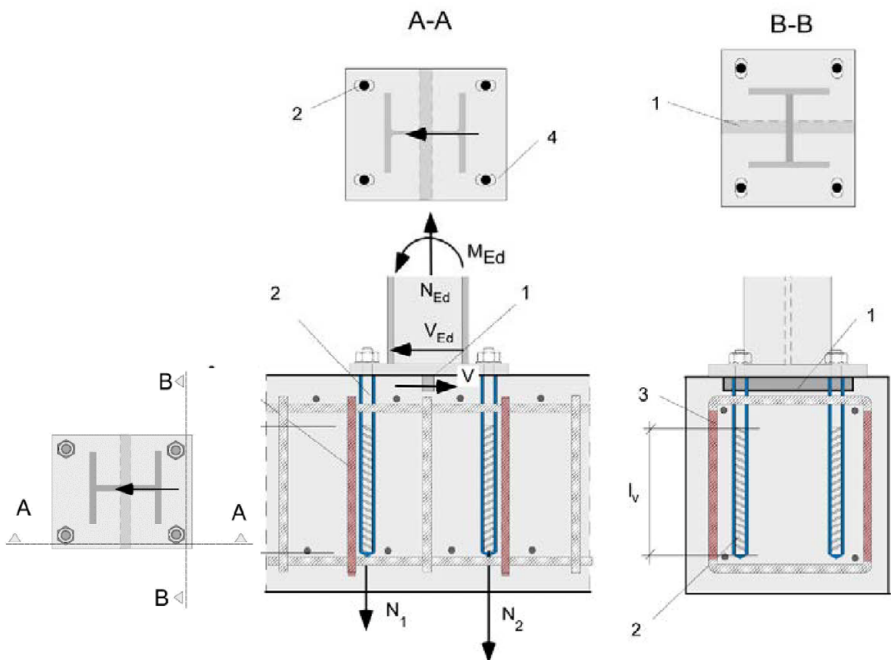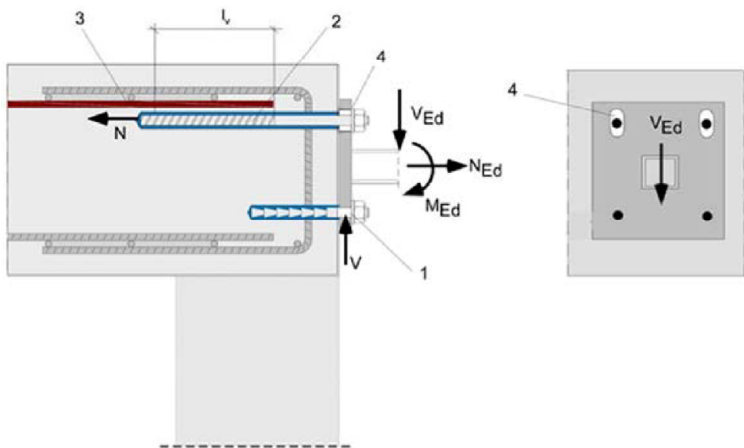3. Existing stirrup / reinforcement for overlap (lap splice)
4. Slotted hole

Figure A3.2:

Lap of the anchoring of guardrail posts or anchoring of cantilevered building components.
In the anchor plate, the drill holes for the Upat rebar anchors have to be designed as slotted holes with axial direction to the shear force.

1. Fastener for shear load transfer
2. Upat rebar tension anchor (tension only)
3. Existing stirrup / reinforcement for overlap (lap splice)
4. Slotted hole

The required transverse reinforcement acc. to EN 1992-1-1:2004+AC:2010 is not shown in the figures. **The Upat rebar anchor may be only used for axial tensile force.** The tensile force must transferred by lap to the existing reinforcement of the building. The transfer of the shear force has to be ensured by suitable measure, e.g. by means of shear force or anchors with European Technical Assessment (ETA).
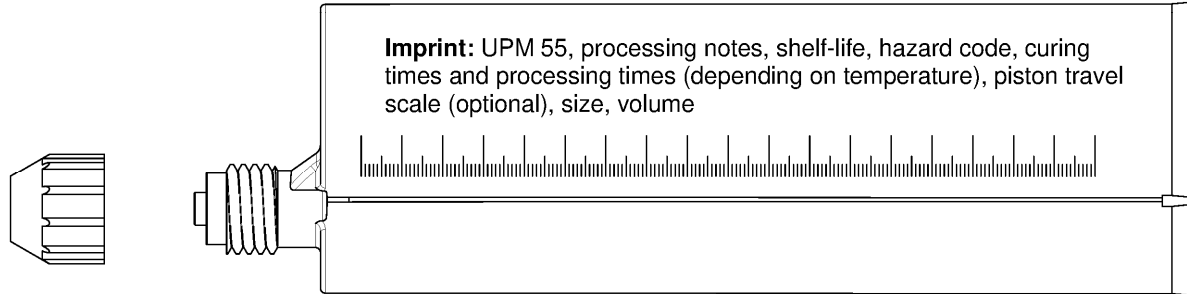
Figures not to scale

Rebar connection with Injection mortar UPM 55	
Product description Installation conditions and application examples Upat rebar anchors, part 3	**Annex A 3**

**Deutsches
Institut
für
Bautechnik**

DIBt

## Overview system components

Injection cartridge (shuttle cartridge) UPM 55 with sealing cap
Sizes: 390 ml, 585 ml, 1100 ml, 1500 ml

Imprint: UPM 55, processing notes, shelf-life, hazard code, curing times and processing times (depending on temperature), piston travel scale (optional), size, volume

### Static mixer MR Plus for injection cartridge 390 ml

Static mixer UMR for injection cartridge 585 ml to 1500 ml

Injection adapter and extension tube Ø 9 for static mixer MR Plus
Injection adapter and extension tube Ø 9 or Ø 15 for static mixer UMR

Reinforcing bar (rebar)
Sizes: $\phi 8$, $\phi 10$, $\phi 12$, $\phi 14$, $\phi 16$, $\phi 20$, $\phi 22$, $\phi 24$, $\phi 25$, $\phi 26$, $\phi 28$, $\phi 30$, $\phi 32$, $\phi 34$, $\phi 36$, $\phi 40$

marking setting depth

Upat rebar anchor FRA / FRA HCR
Sizes: M12, M16, M20, M24

Compressed-air cleaning tool with compressed-air nozzle

Figures not to scale

Rebar connection with Injection mortar UPM 55

Product description	**Annex A 4**
Overview system components; Injection mortar, reinforcing bar, Upat rebar anchor, blow out pump	

**Deutsches
Institut
für
Bautechnik**

DIBt

Properties of reinforcing bars (rebar)

Figure A5.1:

- The minimum value of related rip area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- The maximum outer rebar diameter over the rips shall be:

  o The nominal diameter of the bar with rib $\phi + 2 \cdot h$ ($h \le 0,07 \cdot \phi$)
 o (ϕ: Nominal diameter of the bar; h_{rib} = rib height of the bar)

Table A5.1:   Installation conditions for rebars

Nominal diameter of the bar	ϕ		$8^{1)}$		$10^{1)}$		$12^{1)}$		14	16	20	22	24
Nominal drill hole diameter	d_0		10	12	12	14	14	16	18	20	25	30	30
Drill hole depth	h_0		\multicolumn										
Effective embedment depth	l_v	[mm]											
Minimum thickness of concrete member	h_{min}												

Nominal diameter of the bar	ϕ		$8^{1)}$	$10^{1)}$	$12^{1)}$	14	16	20	22	24
Nominal drill hole diameter	d_0		10 | 12	12 | 14	14 | 16	18	20	25	30	30
Drill hole depth	h_0		$h_0 = l_v$							
Effective embedment depth	l_v	[mm]	acc. to static calculation							
Minimum thickness of concrete member	h_{min}		$l_v + 30$ (≥ 100)			$l_v + 2d_0$				

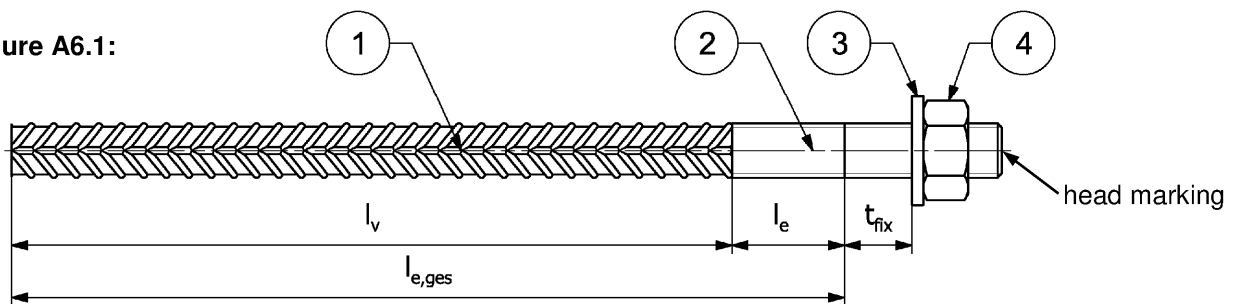| Nominal diameter of the bar	ϕ		$25^{1)}$	26	28	30	32	34	36	40
Nominal drill hole diameter	d_0		30 | 35	35	35	40	40	40	45	55
Drill hole depth	h_0		$h_0 = l_v$							
Effective embedment depth	l_v	[mm]	acc. to static calculation							
Minimum thickness of concrete member	h_{min}		$l_v + 2d_0$							

$^{1)}$ Both drill hole diameters can be used

Table A5.2:   Materials of rebars

Designation	Reinforcing bar (rebar)
Reinforcing bar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCI of EN 1992-1-1/NA $f_{uk} = f_{tk} = k \cdot f_{yk}$

Figures not to scale

Rebar connection with Injection mortar UPM 55	
Product description Properties and materials of reinforcing bars (rebar)	**Annex A 5**

**Deutsches
Institut
für
Bautechnik**

DIBt

Properties of Upat rebar anchor

Figure A6.1:

Head marking e.g.: ⬦✕ FRA (for stainless steel)

⬦✕ FRA HCR (for high corrosion-resistant steel)

Table A6.1: Installation conditions for Upat rebar anchors

Threaded diameter			M12 [2]		M16	M20	M24 [2]	
Nominal diameter	ϕ	[mm]	12		16	20	25	
Width across flat	SW	[mm]	19		24	30	36	
Nominal drill bit diameter	d_0	[mm]	14	16	20	25	30	35
Drill hole depth ($h_0 = l_{ges}$)	$l_{e,ges}$	[mm]	$l_v + l_e$					
Effective embedment depth	l_v	[mm]	according to static calculation					
Distance concrete surface to welded join	l_e	[mm]	100					
Diameter of clearance hole in the fixture[1]	Pre-positioned $\le d_f$	[mm]	14		18	22	26	
	Push through $\le d_f$	[mm]	16	18	22	26	32	40
Minimum thickness of concrete member	h_{min}	[mm]	h_0+30 (≥ 100)		$h_0 + 2d_0$			
Maximum torque moment for attachment of the fixture	max T_{fix}	[Nm]	50		100	150	150	

[1] For bigger clearance holes in the fixture see EN 1992-4:2018
[2] Both drill bit diameters can be used

Table A6.2: Materials of Upat rebar anchors

Part	Description	Materials	
		FRA Corrosion resistance class CRC III acc. to EN 1993-1-4:2006+A1:2015	**FRA HCR** Corrosion resistance class CRC V acc. to EN 1993-1-4:2006+A1:2015
1	Reinforcing bar	Bars and de-coiled rods class B or C with f_{yk} and k according to NDP or NCI of EN 1992-1-1:NA; $f_{uk} = f_{tk} = k \cdot f_{yk}$; ($f_{yk} = 500$ N/mm^2)	
2	Round bar with partial or full thread	Stainless steel, strength class 80, according to EN 10088-1:2014	Stainless steel, strength class 80, according to EN 10088-1:2014
3	Washer ISO 7089:2000	Stainless steel, according to EN 10088-1:2014	Stainless steel, according to EN 10088-1:2014
4	Hexagon nut	Stainless steel, strength class 80, acc. to EN ISO 3506-2:2020, according to EN 10088-1:2014	Stainless steel, strength class 80, acc. to EN ISO 3506-2:2020, according to EN 10088-1:2014

Figures not to scale

Rebar connection with Injection mortar UPM 55

Product description
Properties and materials of Upat rebar anchors

Annex A 6

Specifications of intended use part 1

Table B1.1:   Overview use and performance categories

Anchorages subject to	UPM 55 with …			
	Reinforcing bar		Upat rebar anchor	
Hammer drilling with standard drill bit	all sizes			
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert", Bosch "Speed Clean", Hilti "TE-CD, TE-YD")	Nominal drill bit diameter (d_0) 12 mm to 35 mm			
Diamond drilling	all sizes			
Static and quasi static load, in — uncracked concrete / cracked concrete	all sizes	Tables: C1.1 C1.2 C1.3 C2.1	all sizes	Tables: C1.1 C1.2 C1.3 C1.4 C2.1 C2.2
Seismic action (only hammer drilling with standard / hollow drill bits)	all sizes	Tables: C3.1 C3.2 C3.3	no performance assessed	
Installation temperature	$T_{i,min}$ = -5 °C to $T_{i,max}$ = +40 °C			
Resistance to fire	all sizes	Annex C5	all sizes	Annex C4

Rebar connection with Injection mortar UPM 55	
Intended use Specifications part 1	**Annex B 1**

**Deutsches
Institut
für
Bautechnik**

DIBt

Specifications of intended use part 2

Anchorages subject to:
- Static, quasi-static and seismic loading: reinforcing bar (rebar) size 8 mm to 40 mm
- Resistance to fire

Base materials:
- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013+A1:2016
- Strength classes C12/15 to C50/60 according to EN 206:2013+A1:2016
- Maximum chloride content of 0,40 % (CL 0.40) related to the cement content according to EN 206:2013+A1:2016
- Non-carbonated concrete
  Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of $\phi + 60$ mm prior to the installation of the new rebar. The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1 :2004+AC:2010. The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions

Temperature Range:
- - 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

Installation temperature:
- -5 °C to +40 °C

Use conditions (Environmental conditions) for Upat rebar anchors:
- For all conditions according to EN1993-1-4:2015 corresponding to corrosion resistance classes to Annex A 6 table A6.2

Design:
- Fastenings are designed under the responsibility of an engineer experienced in fastenings and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010, EN 1992-1-2:2004+AC:2008 and Annex B 3 and B 4.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

Installation:
- Dry or wet concrete
- Installation in water filled holes is not allowed
- Hole drilling by hammer drill, hollow drill, compressed air drill or diamond drill mode
- Overhead installation allowed
- The installation of post-installed rebar respectively Upat rebar anchor shall be done only by suitable trained installer and under Supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for Supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).
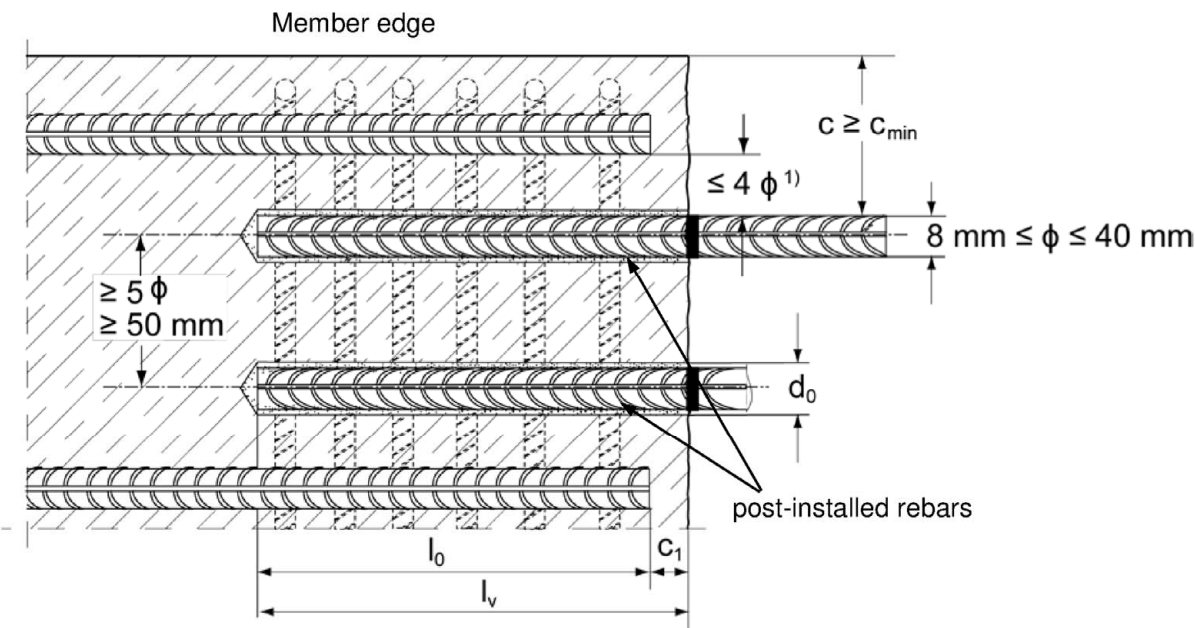
Rebar connection with Injection mortar UPM 55	
Intended use Specifications part 2	**Annex B 2**

**Deutsches
Institut
für
Bautechnik**

DIBt

General construction rules for post-installed rebars

Figure B3.1:

- Only tension forces in the axis of the rebar may be transmitted

- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.

- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

[1] If the clear distance between lapped bars exceeds 4ϕ then the lap length shall be increased by the difference between the clear bar distance and 4ϕ

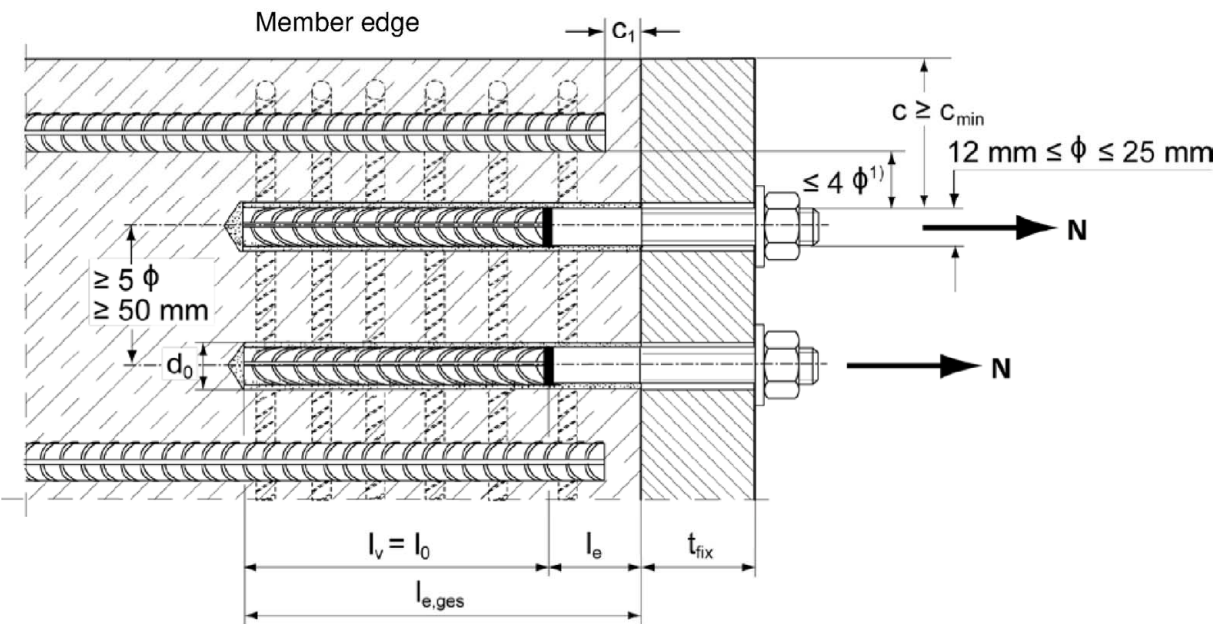|	
c	concrete cover of post-installed rebar
c_1	concrete cover at end-face of existing rebar
c_{min}	minimum concrete cover according to table B5.1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	nominal diameter of reinforcing bar
l_0	lap length, according to EN 1992-1-1:2004+AC:2010 for static loading and according to EN 1998-1:2004, section 5.6.3 for seismic loading
l_v	effective embedment depth, $\geq: l_0 + c_1$
d_0	nominal drill bit diameter, see Annex B 6

Figures not to scale

Rebar connection with Injection mortar UPM 55	
Intended use General construction rules for post-installed rebars	**Annex B 3**

General construction rules for post-installed Upat rebar anchors

Figure B4.1:

- Only tension forces in the axis of the Upat rebar anchor may be transmitted.

- The tension force must be transferred via an overlap joint to the reinforcement in the building part.

- The transmission of the shear load shall be ensured by appropriate additional measures, e.g. by shear lugs or by anchors with a European Technical Assessment (ETA).

- In the anchor plate, the holes for the tension anchor shall be executed as slotted holes with the axis in the direction of the shear force.


[1] If the clear distance between lapped bars exceeds 4ϕ then the lap length shall be increased by the difference between the clear bar distance and 4ϕ.

c	concrete cover of post-installed Upat rebar anchor
c_1	concrete cover at end-face of existing rebar
c_{min}	minimum concrete cover according to table B5.1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
ϕ	nominal diameter of reinforcing bar
l_0	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$l_{e,ges}$	overall embedment depth, $\geq l_0 + l_e$
d_0	nominal drill bit diameter, see Annex B 6
l_e	length of the bonded in threaded part
t_{fix}	thickness of the fixture
l_v	effective embedment depth

Figures not to scale

Rebar connection with Injection mortar UPM 55	
Intended use General construction rules for post-installed Upat rebar anchors	**Annex B 4**

Table B5.1: Minimum concrete cover $c_{min} = c_{min,seis}$ [1] depending of the drilling method and the drilling tolerance

Drilling method	nominal diameter of reinforcing bar φ [mm]	Minimum concrete cover $c_{min} = c_{min,seis}$		
		Without drilling aid [mm]	With drilling aid [mm]	
Hammer drilling with standard drill bit	< 25	30 mm + 0,06 l_v ≥ 2 φ	30 mm + 0,02 l_v ≥ 2 φ	
	≥ 25	40 mm + 0,06 l_v ≥ 2 φ	40 mm + 0,02 l_v ≥ 2 φ	
Hammer drilling with hollow drill bit (fischer "FHD", Heller "Duster Expert", Bosch "Speed Clean", Hilti "TE-CD, TE-YD")	< 25	30 mm + 0,06 l_v ≥ 2 φ	30 mm + 0,02 l_v ≥ 2 φ	 Drilling aid
	≥ 25	40 mm + 0,06 l_v ≥ 2 φ	40 mm + 0,02 l_v ≥ 2 φ	
Compressed air drilling	< 25	50 mm + 0,08 l_v	50 mm + 0,02 l_v	
	≥ 25	60 mm + 0,08 l_v ≥ 2 φ	60 mm + 0,02 l_v ≥ 2 φ	
Diamond drilling	< 25	30 mm + 0,06 l_v ≥ 2 φ	30 mm + 0,02 l_v ≥ 2 φ	
	≥ 25	40 mm + 0,06 l_v ≥ 2 φ	40 mm + 0,02 l_v ≥ 2 φ	

[1] See Annex B3, figure B3.1 and Annex B4, figure B4.1
Note: The minimum concrete cover as specified in EN 1992-1-1:2004+AC:2010 must be observed.

Table B5.2: Dispensers and cartridge sizes corresponding to maximum embedment depth $l_{v,max}$

reinforcing bars (rebar)	Upat rebar anchor	Manual dispenser	Accu and pneumatic dispenser (small)	Pneumatic dispenser (large)
		Cartridge size 390 ml, 585 ml	Cartridge size 390 ml, 585 ml	Cartridge size 1500 ml
φ [mm]	[-]	$l_{v,max}$ / $l_{e,ges,max}$ [mm]	$l_{v,max}$ / $l_{e,ges,max}$ [mm]	$l_{v,max}$ / $l_{e,ges,max}$ [mm]
8	---	1000	1000	1800
10	---			
12	FRA M12 FRA HCR M12		1200	
14	---			
16	FRA M16 FRA HCR M16		1500	
20	FRA M20 FRA HCR M20	700	1300	
22 / 24 / 25	FRA M24 FRA HCR M24		1000	2000
26 / 28	---	500	700	
30 / 32 / 34	---	no performance assessed		
36	---		500	
40	---			

Rebar connection with Injection mortar UPM 55	Annex B 5
Intended use Minimum concrete cover; dispenser and cartridge sizes corresponding to maximum embedment depth	

Deutsches Institut für Bautechnik DIBt

Table B6.1:	Working times t_{work} and curing times t_{cure}	
Temperature in the anchorage base [°C]	**Maximum working time[1] t_{work} UPM 55**	**Minimum curing time[2] t_{cure} UPM 55**
-5 to 0	240 min [3]	200 h
>0 to 5	150 min [3]	90 h
>5 to 10	120 min [3]	40 h
>10 to 20	30 min	18 h
>20 to 30	14 min	10 h
>30 to 40	7 min [4]	5 h

[1] Maximum time from the beginning of the injection to rebar / Upat rebar anchor setting and positioning
[2] For wet concrete the curing time must be doubled
[3] If the temperature in the concrete falls below 10°C the cartridge has to be warmed up to +15°C.
[4] If the temperature in the concrete exceeds 30 °C the cartridge has to be cooled down to +15°C up to 20°C

Table B6.2:	Installation tools for drilling and cleaning the bore hole and injection of the mortar

reinforcing bars (rebar) ϕ [mm]	Upat rebar anchor [-]	Drilling and cleaning				Injection	
		Nominal drill bit diameter d_0 [mm]	Diameter of cutting edge d_{cut} [mm]	Steel brush diameter d_b [mm]	Diameter of cleaning nozzle [mm]	Diameter of extension tube [mm]	Injection adapter [colour]
8[1]	---	10	≤ 10,50	11,0	---	9	---
		12	≤ 12,50	12,5	11		nature
10[1]	---	12	≤ 12,50	12,5	11		
		14	≤ 14,50	15			blue
12[1]	FRA M12[1] FRA HCR M12[1]	14	≤ 14,50	15	15		
		16	≤ 16,50	17			red
14	---	18	≤ 18,50	19		9 or 15	yellow
16	FRA M16 FRA HCR M16	20	≤ 20,55	21,5	19		green
20	FRA M20 FRA HCR M20	25	≤ 25,55	26,5			black
22 / 24	---	30	≤ 30,55	32			grey
25[1]	FRA M24[1] FRA HCR M24[1]	30	≤ 30,55	32	28		grey
		35	≤ 35,70	37			brown
26 / 28	---	35	≤ 35,70	37			brown
30 / 32 / 34	---	40	≤ 40,70	42	38		red
36	---	45	≤ 45,70	47			yellow
40	---	55	≤ 55,70	58			nature

[1] Both drill bit diameters can be used

Rebar connection with Injection mortar UPM 55	
Intended use Working times and curing times; Installation tools for drilling and cleaning the bore hole and injection of the mortar	**Annex B 6**

Safety regulations

(pictograms)	Review the Material Safety Data Sheet (SDS) before use for proper and safe handling! Wear well-fitting protective goggles and protective gloves when working with mortar UPM 55 Important: Observe the instructions for use provided with each cartridge.

## Installation instruction part 1; Installation with UPM 55

Hole drilling

Note: Before drilling, remove carbonized concrete; clean contact areas (see Annex B 2)
In case of aborted drill holes the drill hole shall be filled with mortar.

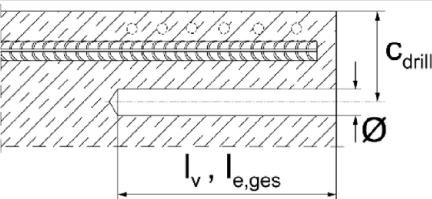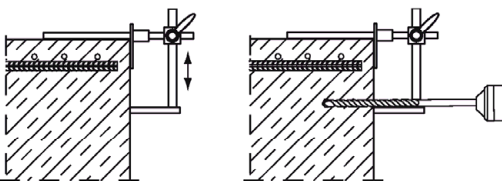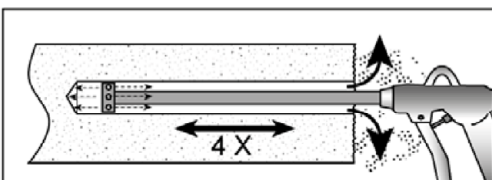|		
1a	**Hammer drilling or compressed air drilling**	Drill the hole to the required embedment depth using a hammer drill with carbide drill bit set in rotation hammer mode or a pneumatic drill. Drill bit sizes see table B6.2
1b	**Hammer drilling with hollow drill bit**	Drill the hole to the required embedment depth using a hammer drill with hollow drill bit in rotation hammer mode. Dust extraction conditions see drill hole cleaning annex B 8. Drill bit sizes see table B6.2
1c	**Diamond drilling**	Drill the hole to the required embedment depth using a diamond drill in rotation mode. Drill bit sizes see table B6.2
		Break away the drill core and remove it
2	c_{drill}, $\varnothing$, l_v, $l_{e,ges}$	Measure and control concrete cover c ($c_{drill} = c + \varnothing / 2$) Drill parallel to surface edge and to existing rebar. Where applicable use drilling aid.
		For holes $l_v > 20$ cm use drilling aid. Three different options can be considered: A) drilling aid B) Slat or spirit level C) Visual check Minimum concrete cover c_{min} see table B5.1

Rebar connection with Injection mortar UPM 55	
Intended use Safety regulations; Installation instruction part 1, hole drilling	**Annex B 7**

**Deutsches
Institut
für
Bautechnik**

DIBt

Installation instruction part 2; Installation with UPM 55

Drill hole cleaning

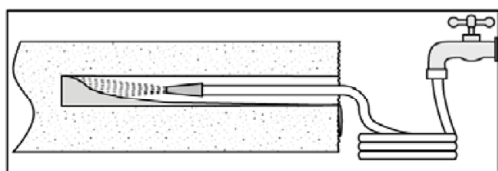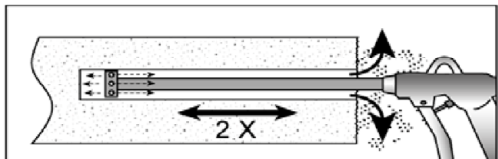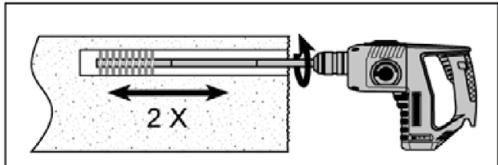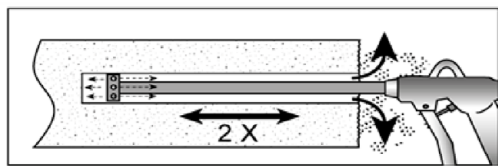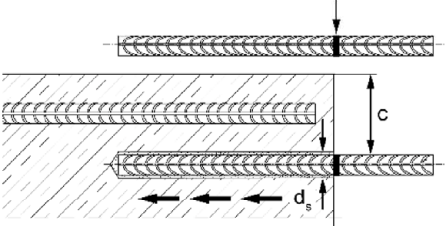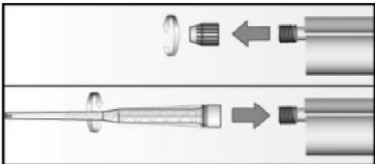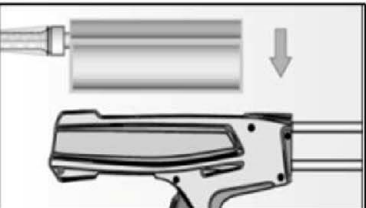|			
3a	**Hammer or compressed air drilling**		
		4 X	Blowing four times from the back of the hole with the appropriate nozzle (oil-free compressed air ≥ 6 bar) until return air stream is free of noticeable dust. Personal protective equipment must be used (see regulations Annex B 7).
3b	**Hammer drilling with hollow drill bit**		
			Use a suitable dust extraction system, e. g. fischer FVC 35 M or a comparable dust extraction system with equivalent performance data. Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. No further drill hole cleaning necessary
3c	**Diamond drilling**		
			Flush the bore hole until the water comes clear
		2 X	Blowing twice from the back of the hole with the appropriate nozzle (oil-free compressed air ≥ 6 bar) until return air stream is free of noticeable dust. Personal protective equipment must be used (see regulations Annex B 7).
		2 X	Check steel brush with brush control template. Fix an adequate steel brush with an extension into a drilling machine and brush the bore hole twice
		2 X	Blowing twice from the back of the hole with the appropriate nozzle (oil-free compressed air ≥ 6 bar) until return air stream is free of noticeable dust. Personal protective equipment must be used (see regulations Annex B 7).

Rebar connection with Injection mortar UPM 55	
Intended use Installation instruction part 2, hole cleaning	**Annex B 8**

**Deutsches
Institut
für
Bautechnik**

DIBt

		Installation instruction part 3; Installation with UPM 55
		reinforcing bars (rebar) / Upat rebar anchor and cartridge preparation

4		Before use, make asure that the rebar or the Upat rebar anchor is dry and free of oil or other residue. Mark the embedment depth l_v on the rebar (e.g. with tape) Insert rebar in borehole, to verify drill hole depth and setting depth l_v resp. $l_{e,ges}$
5		Twist off the sealing cap Twist on the static mixer (the spiral in the static mixer must be clearly visible).
6		Place the cartridge into a suitable dispenser.
7		Press out approximately 10 cm of mortar until the resin is permanently grey in colour. Mortar which is not grey in colour will not cure and must be disposed.

Rebar connection with Injection mortar UPM 55

Intended use
Installation instruction part 3,
reinforcing bars (rebar) / Upat rebar anchor and cartridge preparation

Annex B 9

Installation instruction part 4; Installation with UPM 55

Injection of the mortar; borehole depth ≤ 250 mm

8a		Inject the mortar from the back of the hole towards the front and slowly withdraw the static mixer step by step with each trigger pull. Avoid bubbles. Fill holes approximately 2/3 full, to ensure that the annular gap between the rebar and the concrete will be completely filled with adhesive over the entire embedment length.
		After injecting, release the dispenser. This will prevent further mortar discharge from the static mixer.

Injection of the mortar; borehole depth > 250 mm

8b		Assemble static mixer, extension tube and appropriate injection adapter (see table B 6.2)
	Mortar level mark	Mark the required mortar level l_m and embedment depth l_v resp. $l_{e,ges}$ with tape or marker on the injection extension tube. a) Estimation: $$l_m = \frac{1}{3} * l_v \ resp. \ l_m = \frac{1}{3} * l_{e,ges} \ [mm]$$ b) Precise equation for optimum mortar volume: $$l_m = l_v \ resp. l_{e,ges} \left(\left(1{,}2 * \frac{d_s^2}{d_0^2} - 0{,}2\right)\right) [mm]$$
	Mortar level mark	Insert injection adapter to back of the hole. Begin injection allowing the pressure of the injected adhesive mortar to push the injection adapter towards the front of the hole. Do not actively pull out! Fill holes approximately 2/3 full, to ensure that the annular gap between the rebar and the concrete will be completely filled with adhesive over the embedment length. When using an injection adapter continue injection until the mortar level mark l_m becomes visible. Maximum embedment depth see table B5.2
		After injecting, release the dispenser. This will prevent further mortar discharge from the static mixer.

Rebar connection with Injection mortar UPM 55	
Intended use Installation instruction part 4, mortar injection	**Annex B 10**

**Deutsches
Institut
für
Bautechnik**

DIBt

Installation instruction part 5; Installation with UPM 55

Insert rebar / upat rebar anchor

9		Insert the rebar / Upat rebar anchor FRA / FRA HCR slowly twisted into the borehole until the embedment mark is reached. Recommendation: Rotation back and forth of the reinforcement bar or the Upat rebar anchor FRA makes pushing easy
10		For overhead installation, support the rebar / Upat rebar anchor and secure it from falling till mortar started to harden, e.g. using wedges.
11		After installing the rebar or Upat rebar anchor the annular gap must be completely filled with mortar. Proper installation • Desired embedment depth is reached l_v: embedment mark at concrete surface. • Excess mortar flows out of the borehole after the rebar has been fully inserted up to the embedment mark.
12		Observe the working time "t_{work}" (see table B6.1), which varies according to temperature of base material. Minor adjustments to the rebar / Upat rebar anchor position may be performed during the working time Full load may be applied only after the curing time "t_{cure}" has elapsed (see table B 6.1)
13		Mounting the fixture, max T_{fix} see table A6.1

Rebar connection with Injection mortar UPM 55

Intended use Installation instruction part 5, insert rebar / Upat rebar anchor	**Annex B 11**

Minimum anchorage length and minimum lap length

The minimum anchorage length $l_{b,min}$ and the minimum lap length $l_{0,min}$ according to EN 1992-1-1: 2004+AC:2010 shall be multiply by the relevant amplification factor $\alpha_{lb} = \alpha_{lb,100y}$ according to table C1.1.

Table C1.1: Amplification factor $\alpha_{lb} = \alpha_{lb,100y}$ related to concrete strength class and drilling method with a service life of 50 or 100 years

Rebar / Upat rebar anchor ϕ [mm]	Amplification factor $\alpha_{lb} = \alpha_{lb,100y}$								
	Concrete strength class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Hammer drilling, hollow drilling and compressed air drilling									
8 to 25	1,0								
26 to 40	1,0								
Diamond drilling									
8 to 12	1,0			1,04	1,08	1,13	1,17	1,21	1,25
14 to 25	1,0			1,04	1,08	1,13	1,17	1,21	1,25
26 to 40	1,0			1,08	1,17	1,25	1,33	1,42	1,50

Table C1.2: Bond efficiency factor $k_b = k_{b,100y}$ for hammer drilling, hollow drilling and compressed air drilling with a service life of 50 or 100 years

Rebar / Upat rebar anchor ϕ [mm]	Bond efficiency factor $k_b = k_{b,100y}$								
	Concrete strength class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Hammer drilling, hollow drilling and compressed air drilling									
8 to 25	1,0								0,98
26 to 40	1,0								0,98

Table C1.3: Bond efficiency factor $k_b = k_{b,100y}$ for diamond drilling with a service life of 50 or 100 years

Rebar / Upat rebar anchor ϕ [mm]	Bond efficiency factor $k_b = k_{b,100y}$								
	Concrete strength class								
	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
Diamond drilling									
8 to 12	1,0								0,95
14 to 25	1,0								0,95
26 to 40	1,0					0,96	0,87	0,81	0,76

Table C1.4: Characteristic **tensile yield strength** for rebar part of **Upat rebar anchors**

Upat rebar anchor FRA / FRA HCR			M12	M16	M20	M24
Characteristic tensile yield strength for rebar part						
Rebar diameter	ϕ	[mm]	12	16	20	25
Characteristic tensile yield strength	f_{yk}	[N/mm²]	500	500	500	500
Partial factor for rebar part	$\gamma_{Ms,N}$ [1]	[-]	1,15			

[1] In absence of national regulations

Rebar connection with Injection mortar UPM 55	**Annex C 1**
Performance Amplification factor $\alpha_{lb} = \alpha_{lb,100y}$ bond efficiency factor $k_b = k_{b,100y}$; Characteristic tensile yield strength for rebar part	

Table C2.1: Characteristic resistance to **steel failure** under tension loading of **Upat rebar anchors**

Upat rebar anchor FRA / FRA HCR			M12	M16	M20	M24
Characteristic resistance to steel failure under tension loading						
Characteristic resistance	$N_{Rk,s}$	[kN]	62	111	173	263
Partial factor						
Partial factor	$\gamma_{Ms,N}$[1]	[-]	1,4			

[1] In absence of national regulations

Table C2.2: Design values of the bond strength $f_{bd,PIR} = f_{bd,PIR,100y}$ in N/mm² for hammer drilling, hollow drilling, compressed air drilling and diamond drilling with a service life of 50 or 100 years

$$f_{bd,PIR} = k_b \cdot f_{bd}$$
$$f_{bd,PIR,100y} = k_{b,100y} \cdot f_{bd}$$

f_{bd} : Design value of the bond strength in N/mm² considering the concrete strength classes and the rebar diameter for good bond condition (for all other bond conditions multiply the values by $\eta_1 = 0,7$) and recommended partial factor $\gamma_c = 1,5$ according to EN 1992-1-1: 2004+AC:2010

k_b Bond efficiency factor according to table C1.2 and C1.3

$k_{b,100y}$ Bond efficiency factor according to table C1.2 and C1.3

Hammer drilling, hollow drilling and compressed air drilling

Rebar / Upat rebar anchor	bond strength $f_{bd,PIR} = f_{bd,PIR,100y}$ [N/mm²]								
	Concrete strength class								
ϕ [mm]	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8-32	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,2
34	1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,1
36	1,5	1,9	2,2	2,6	2,9	3,3	3,6	3,8	4,0
40	1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7	3,9

Diamond drilling

Rebar / Upat rebar anchor	bond strength $f_{bd,PIR} = f_{bd,PIR,100y}$ [N/mm²]								
	Concrete strength class								
ϕ [mm]	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8-12						3,4	3,7	4,0	4,1
14-25	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,1
26-32						3,2	3,2	3,2	3,2
34	1,6	2,0	2,3	2,6	2,9	3,1	3,1	3,1	3,1
36	1,5	1,9	2,2	2,6	2,9	3,1	3,1	3,1	3,1
40	1,5	1,8	2,1	2,5	2,8	2,9	2,9	2,9	2,9

Rebar connection with Injection mortar UPM 55	
Performance Design values of the bond strength $f_{bd,PIR} = f_{bd,PIR,100y}$	**Annex C 2**

Minimum anchorage length and minimum lap length under seismic conditions

The minimum anchorage length $l_{b,min}$ and the minimum lap length $l_{0,min}$ according to EN 1992-1-1: 2004+AC:2010 shall be multiply by the relevant amplification factor $\alpha_{lb,seis}$ according to table C3.1.

Table C3.1: Amplification factor $\alpha_{lb,seis} = \alpha_{lb,seis100y}$ related to concrete strength class and drilling method

Hammer drilling, hollow drilling and compressed air drilling

Rebar ϕ [mm]	Amplification factor $\alpha_{lb,seis} = \alpha_{lb,seis,100y}$							
	Concrete strength class							
	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 25	1,0							
26 to 40	1,0							

Table C3.2: Bond efficiency factor $k_{b,seis} = k_{b,seis,100y}$ for hammer drilling, hollow drilling and compressed air drilling with a service life of 50 or 100 years

Hammer drilling, hollow drilling and compressed air drilling

Rebar ϕ [mm]	Bond efficiency factor $k_{b,seis} = k_{b,seis,100y}$							
	Concrete strength class							
	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 25	1,00							0,98
26 to 40	1,00							0,98

Table C3.3: Design values of the bond strength $f_{bd,PIR,seis} = f_{bd,PIR,seis,100y}$ in N/mm² for hammer drilling, hollow drilling and compressed air drilling **under seismic action** and for good bond conditions with a service life of 50 or 100 years

$$f_{bd,PIR,seis} = k_{b,seis} \cdot f_{bd}$$
$$f_{bd,PIR,seis,100y} = k_{b,seis,100y} \cdot f_{bd}$$

Hammer drilling, hollow drilling and compressed air drilling

Rebar ϕ [mm]	bond strength $f_{bd,PIR,seis} = f_{bd,PIR,seis,100y}$ [N/mm²]							
	Concrete strength class							
	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8-32	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,2
34	1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9
36	1,5	1,9	2,2	2,6	2,9	3,3	3,6	3,8
40	1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7

Rebar connection with Injection mortar UPM 55	
Performance Amplification factor $\alpha_{lb,seis} = \alpha_{lb,seis,100y}$, bond efficiency factor $k_{b,seis} = k_{b,seis,100y}$, Design values of the bond strength $f_{bd,PIR,seis} = f_{bd,PIR,seis,100y}$	**Annex C 3**

**Deutsches
Institut
für
Bautechnik**

DIBt

Table C4.1:	Essential characteristics to **steel failure** for **Upat rebar anchors** under fire exposure

concrete strength classes C12/C15 to C50/60, according to EN 1992-4:2018

Upat rebar anchor FRA / FRA HCR				**M12**	**M16**	**M20**	**M24**
Characteristic resistance to steel failure	R30	$N_{Rk,s,fi}$	[kN]	1,7	2,5	4,7	7,4
	R60			1,5	2,1	3,9	6,1
	R90			1,2	1,7	3,1	4,9
	R120			0,9	1,3	2,5	3,9

Rebar connection with Injection mortar UPM 55	**Annex C 4**
Performance Characteristic resistance to steel failure $N_{Rk,s,fi}$ under fire exposure for Upat rebar anchor	

**Deutsches
Institut
für
Bautechnik**

DIBt

Design value of the ultimate bond strength f$_{bd,fi}$ and f$_{bd,fi,100y}$ at increased temperature for concrete strength classes C12/15 to C50/60 (all drilling methods)

The design value of the bond strength f$_{bd,fi}$ for a working life of 50 years and f$_{bd,fi,100y}$ for a working life of 100 years at increased temperature has to be calculated by the following equation:

Working life 50 years:
$$f_{bd,fi} = k_{fi}(\theta) \cdot f_{bd,PIR} \cdot \frac{\gamma_c}{\gamma_{M,fi}}$$

Working life 100 years:
$$f_{bd,fi,100y} = k_{fi,100y}(\theta) \cdot f_{bd,PIR,100} \cdot \frac{\gamma_c}{\gamma_{M,fi}}$$

If: $\theta > 46\ °C$

$$k_{fi}(\theta) = \frac{862{,}3 \cdot \theta^{-1{,}166}}{f_{bd,PIR} \cdot 4{,}3} \le 1{,}0 \qquad \text{50 years}$$

$$k_{fi,100y}(\theta) = \frac{862{,}3 \cdot \theta^{-1{,}166}}{f_{bd,PIR,100y} \cdot 4{,}3} \le 1{,}0 \qquad \text{100 years}$$

If: $\theta > \theta_{max}\ (284\ °C)$ $k_{fi}(\theta) = k_{,fi,100y}(\theta) = 0$

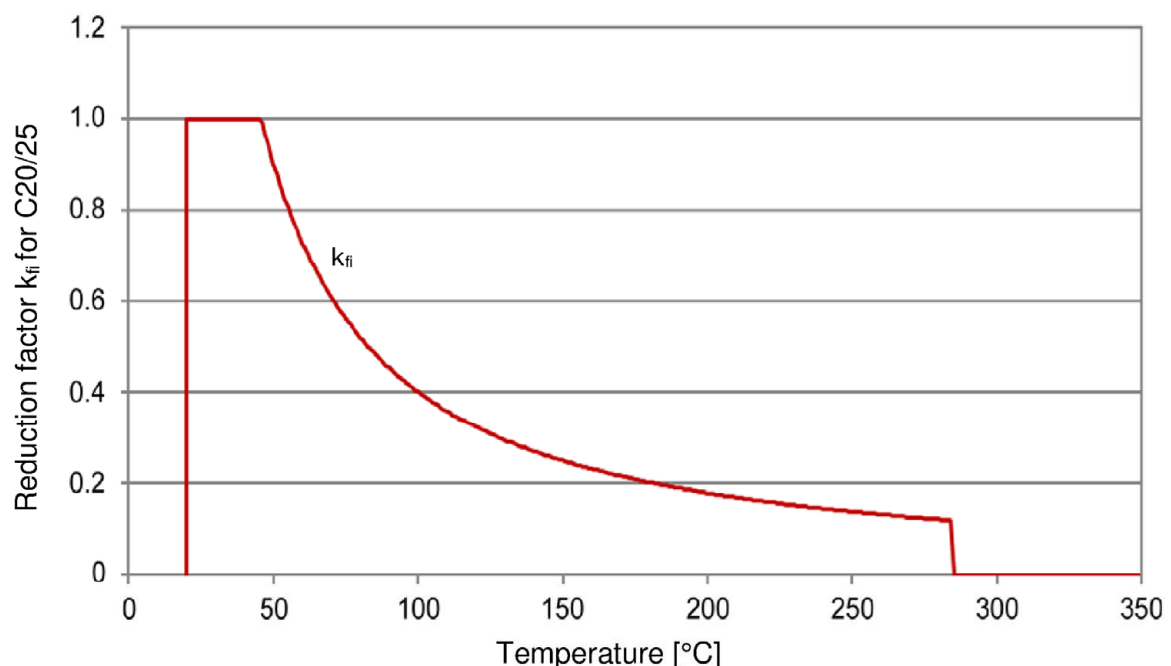|		
f$_{bd,fi}$, f$_{bd,fi,100y}$	=	Design value of the ultimate bond strenth at increased temperature in N/mm²
(θ)	=	Temperature in °C in the mortar layer
k$_{fi}$ (θ), k$_{fi,100y}$ (θ)	=	Reduction factor at increased temperature
f$_{bd,PIR}$, f$_{bd,PIR,100y}$	=	Design value of the bond strength in N/mm² in cold condition according to table C2.1 considering the concrete strength classes, the rebar diameter, the drilling method and the bond conditions according to EN 1992-1-1:2004+AC:2010
γ$_C$	=	1,5 recommended Partial factor according to EN 1992-1-1:2004+AC:2010
γ$_{M,fi}$	=	1,0 recommended value

For evidence at increased temperature the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent ultimate design value of bond strength f$_{bd,fi}$.

Figure C5.1:   Example graph of reduction factor k$_{fi}$ (θ), k$_{fi,100y}$ (θ) for concrete strength class C20/25 for good bond conditions

---

Rebar connection with Injection mortar UPM 55

Performance
Design value of ultimate bond strength f$_{bd,fi}$ = f$_{bd,fi,100y}$ at increased temperature

Annex C 5