

Eine vom Bund und den Ländern gemeinsam getragene Anstalt des öffentlichen Rechts

Kolonnenstraße 30 B

D-10829 Berlin

Tel.: +49 30 78730-0

Fax: +49 30 78730-320

E-Mail: dibt@dibt.de

www.dibt.de



Mitglied der EOTA

Member of EOTA

European Technical Approval ETA-08/0262

English translation prepared by DIBt - Original version in German language

Handelsbezeichnung <i>Trade name</i>	SFS intec Flachdachbefestigungselemente <i>SFS intec Flat Roof Fasteners</i>		
Zulassungsinhaber <i>Holder of approval</i>	SFS intec AG FasteningSystems Rosenbergsaustraße 10 9435 HEERBRUGG SCHWEIZ		
Zulassungsgegenstand und Verwendungszweck <i>Generic type and use of construction product</i>	Befestigungselemente für Dachabdichtungssysteme <i>Fasteners for flexible roof waterproofing systems</i>		
Geltungsdauer: <i>Validity:</i>	vom <i>from</i>	25 April 2013	
	bis <i>to</i>	28 October 2017	
Herstellwerke <i>Manufacturing plants</i>	Werk 1, Werk 2, Werk 3, Werk 4, Werk 5, Werk, 6, Werk 7, Werk 8, Werk 9, Werk 10 Factory 1, factory 2, factory 3, factory 4, factory 5, factory 6, factory 7, factory 8, factory 9, factory 10		

Diese Zulassung umfasst
This Approval contains

173 Seiten einschließlich 167 Anhänge
173 pages including 167 annexes

Diese Zulassung ersetzt
This Approval replaces

ETA-08/0262 mit Geltungsdauer vom 04.06.2012 bis 28.10.2017
ETA-08/0262 with validity from 04.06.2012 to 28.10.2017

European technical approval

ETA-08/0262

English translation prepared by DIBt

Page 2 of 173 | 25 April 2013

I LEGAL BASES AND GENERAL CONDITIONS

- 1 This European technical approval is issued by Deutsches Institut für Bautechnik in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, modified by Council Directive 93/68/EEC² and Regulation (EC) N° 1882/2003 of the European Parliament and of the Council³;
 - *Gesetz über das In-Verkehr-Bringen von und den freien Warenverkehr mit Bauprodukten zur Umsetzung der Richtlinie 89/106/EWG des Rates vom 21. Dezember 1988 zur Angleichung der Rechts- und Verwaltungsvorschriften der Mitgliedstaaten über Bauprodukte und anderer Rechtsakte der Europäischen Gemeinschaften (Bauproduktengesetz - BauPG) vom 28. April 1998⁴, as amended by Article 2 of the law of 8 November 2011⁵;*
 - Common Procedural Rules for Requesting, Preparing and the Granting of European technical approvals set out in the Annex to Commission Decision 94/23/EC⁶;
 - Guideline for European technical approval of "Mechanically fastened flexible roof waterproofing membranes", ETAG 006.
- 2 Deutsches Institut für Bautechnik is authorized to check whether the provisions of this European technical approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European technical approval and for their fitness for the intended use remains with the holder of the European technical approval.
- 3 This European technical approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European technical approval.
- 4 This European technical approval may be withdrawn by Deutsches Institut für Bautechnik, in particular pursuant to information by the Commission according to Article 5(1) of Council Directive 89/106/EEC.
- 5 Reproduction of this European technical approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Deutsches Institut für Bautechnik. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European technical approval.
- 6 The European technical approval is issued by the approval body in its official language. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities L 40, 11 February 1989, p. 12

² Official Journal of the European Communities L 220, 30 August 1993, p. 1

³ Official Journal of the European Union L 284, 31 October 2003, p. 25

⁴ *Bundesgesetzblatt Teil I* 1998, p. 812

⁵ *Bundesgesetzblatt Teil I* 2011, p. 2178

⁶ Official Journal of the European Communities L 17, 20 January 1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of the products and intended use

1.1 Definition of the construction product

The construction products are mechanical fasteners. The fasteners comprise a screw, blind rivet or anchor made of coated carbon steel, aluminium or stainless steel and a washer with or without integrated sleeve. The washers without integrated sleeve are made of coated carbon steel whereas the washers with integrated sleeve are made of polypropylene or polyamide.

1.2 Intended use

The fasteners are intended to be used for the fastening of flexible roof waterproofing membranes according to ETAG 006. The possible substructures are steel or aluminium decks, concrete, aerated concrete, pumice panel or timber.

The provisions made in this European technical approval are based on an assumed working life of the fasteners of 10 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

In order to use the fasteners for systems of mechanically fastened flexible roof waterproofing membranes a separate ETA according to ETAG 006 is necessary for the entire roof waterproofing system.

2 Characteristics of the products and methods of verification

2.1 Characteristics of the products

The fasteners shall correspond to the information given in Annexes 1 to 158.

Corrosion resistance of blind rivet type TPR-L shall be provided by minimum 8 µm galvanisation.

The material properties, dimensions and tolerances not indicated in Annexes 1 to 158 shall correspond to the information laid down in the technical information⁷ to this European technical approval.

2.2 Safety in use (ER 4)

The characteristic values of the axial load resistance of the fasteners are given in Annexes 159 to 169. The values were determined by axial loading tests according to ETAG 006.

The fasteners are deemed to satisfy the requirements of ETAG 006 concerning unwinding. This was either evaluated by tests or on the basis of the existing field experience of the manufacturer.

⁷ The technical documentation is deposited with Deutsches Institut für Bautechnik and as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure is handed over to the approved bodies.

European technical approval

ETA-08/0262

Page 4 of 173 | 25 April 2013

English translation prepared by DIBt

2.3 Aspects of durability

The durability requirements of ETAG 006 (resistance to corrosion of metallic fasteners, impact resistance and brittleness of plastic fasteners before and after heat ageing, requirements for results of Charpy tests for plastic materials before and after heat ageing) are satisfied for the coated carbon steel, aluminium, stainless steel, polypropylene and polyamide components of the fasteners.

All coated carbon steel components resisted to 15 cycles of the test procedure described in ETAG 006 (Kesternich test) and did not show more than 15 % surface corrosion.

The test results of the tests to check the impact resistance and brittleness of the polyamide components showed a drop height of more than 1,0 m before and after heat ageing of these components. Furthermore the results of the corresponding Charpy tests after heat ageing did not show any significant decline compared to the results before heat ageing.

3 Evaluation and attestation of conformity and CE marking

3.1 System of attestation of conformity

According to the Decision 98/143/EC of the European Commission⁸ system 2+ of the attestation of conformity applies.

This system of attestation of conformity is defined as follows:

System 2+: Declaration of conformity of the products by the manufacturer on the basis of:

(a) Tasks for the manufacturer:

- (1) initial type-testing of the product;
- (2) factory production control;
- (3) testing of samples taken at the factory in accordance with a prescribed test plan.

(b) Tasks for the approved body:

- (4) certification of factory production control on the basis of:
 - initial inspection of factory and of factory production control;
 - continuous surveillance, assessment and approval of factory production control.

Note: Approved bodies are also referred to as "notified bodies".

3.2 Responsibilities

3.2.1 Tasks for the manufacturer

3.2.1.1 Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the products are in conformity with this European technical approval.

The manufacturer may only use initial materials stated in the technical documentation of this European technical approval.

European technical approval

ETA-08/0262

Page 5 of 173 | 25 April 2013

English translation prepared by DIBt

The factory production control shall be in accordance with the control plan which is part of the technical documentation of this European technical approval. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited with Deutsches Institut für Bautechnik.⁹

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

3.2.1.2 Other tasks for the manufacturer

The manufacturer shall, on the basis of a contract, involve a body which is approved for the tasks referred to in section 3.1 in the field of "Fasteners for flexible roof waterproofing membranes" in order to undertake the actions laid down in section 3.2.2. For this purpose, the control plan referred to in sections 3.2.1.1 and 3.2.2 shall be handed over by the manufacturer to the approved body involved.

The manufacturer shall make a declaration of conformity, stating that the construction products are in conformity with the provisions of this European technical approval.

3.2.2 Tasks for the approved bodies

The approved body shall perform the

- initial inspection of factory and of factory production control,
 - continuous surveillance, assessment and approval of factory production control
- in accordance with the provisions laid down in the control plan.

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the factory production control stating the conformity with the provisions of this European technical approval.

In cases where the provisions of the European technical approval and its control plan are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform Deutsches Institut für Bautechnik without delay.

3.3 CE marking

The CE marking shall be affixed on each packaging of fasteners. The letters "CE" shall be followed by the identification number of the approved certification body, where relevant, and be accompanied by the following additional information:

- the name and address of the producer (legal entity responsible for the manufacture),
- the last two digits of the year in which the CE marking was affixed,
- the number of the EC certificate for the factory production control,
- the number of the European technical approval,
- the name of the product.

⁹

The control plan is a confidential part of the European technical approval and only handed over to the approved body involved in the procedure of attestation of conformity. See section 3.2.2.

European technical approval

ETA-08/0262

English translation prepared by DIBt

Page 6 of 173 | 25 April 2013

4 Assumptions under which the fitness of the products for the intended use was favourably assessed

4.1 Manufacturing

The European technical approval is issued for the products on the basis of agreed data/information, deposited with Deutsches Institut für Bautechnik, which identifies the products that have been assessed and judged. Changes to the products or production process, which could result in this deposited data/information being incorrect, should be notified to Deutsches Institut für Bautechnik before the changes are introduced. Deutsches Institut für Bautechnik will decide whether or not such changes affect the approval and consequently the validity of the CE marking on the basis of the approval and if so whether further assessment or alterations to the approval shall be necessary.

4.2 Installation

The installation is carried out according to the manufacturer's instructions. The manufacturer hands over the assembly instructions to the assembler.

In order to use the fasteners for systems of mechanically fastened flexible roof waterproofing membranes a valid ETA according to ETAG 006 is issued for the entire roof waterproofing system. The ETA according to ETAG 006 covers the wind uplift resistance of the entire system as well as the product characteristics of the components of the system.

The conformity of the installed fastener with this ETA is attested by the executing company.

5 Indications to the manufacturer


It is in the responsibility of the manufacturer to ensure that the information on the specific conditions according to 1, 2 and 4 is given to those who are concerned. The information may be given by reproduction of the European technical approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

Georg Feistel
Head of Department


beglaubigt:
Hahn



IR2-4,8xL

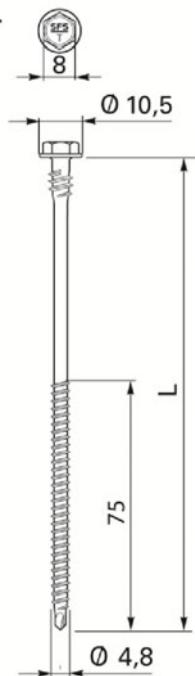

IR-82x40

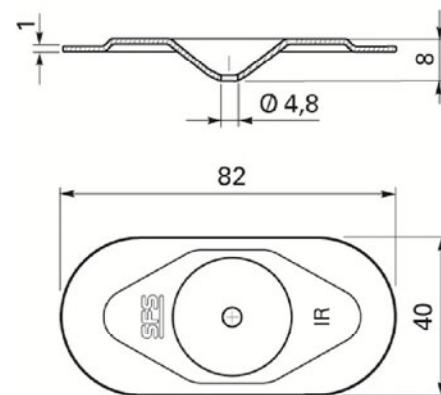


SFS intec flat roof fasteners

Combination 1
SFS intec IR2-4,8xL
SFS intec IR-82x40


Annex 1



IR2-4,8xL

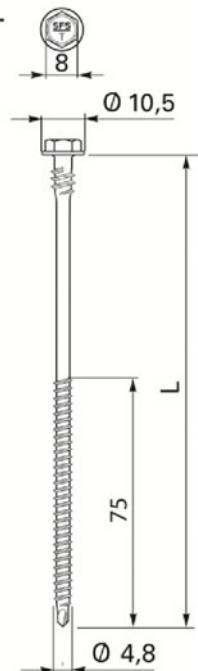

IF-70x70

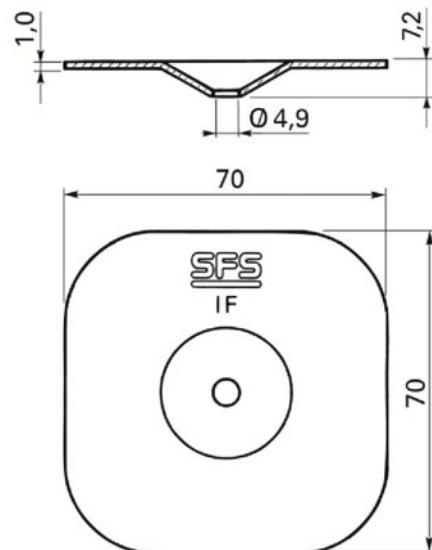


SFS intec flat roof fasteners

Combination 2
SFS intec IR2-4,8xL
SFS intec IF-70x70


Annex 2



IR2-S-4,8xL

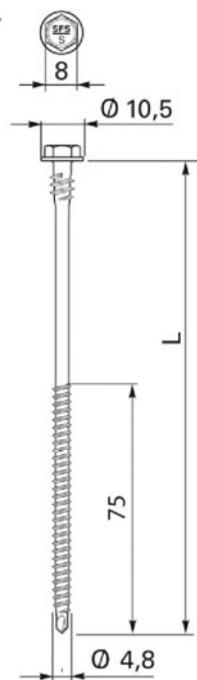


IR-82x40

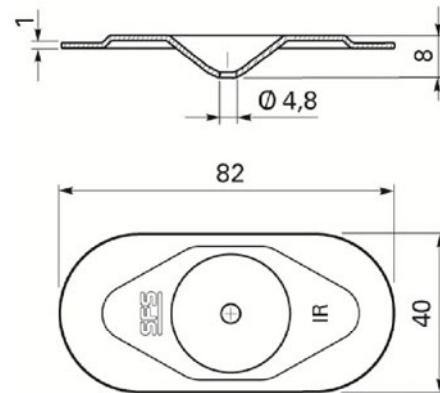




IR3-4,8xL

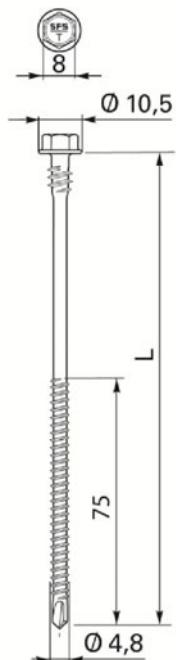

IR-82x40

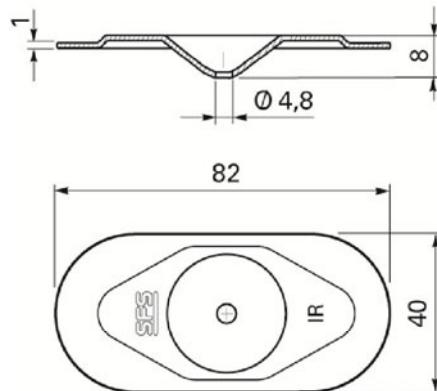


SFS intec flat roof fasteners

Combination 4
SFS intec IR3-4,8xL
SFS intec IR-82x40


Annex 4




IR3-S-4,8xL

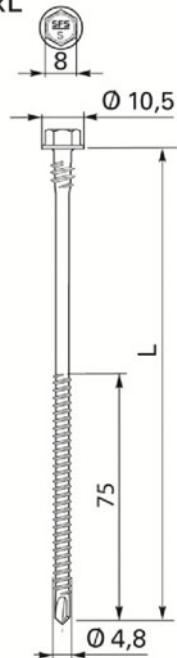


IR-82x40

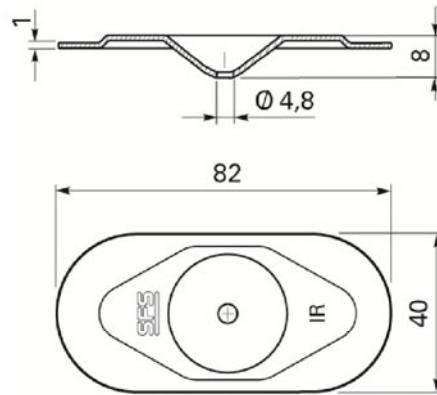


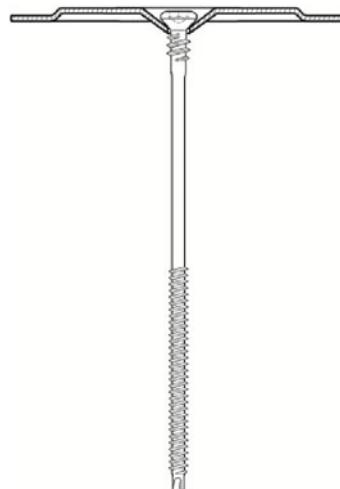

IR2-C-4,8xL

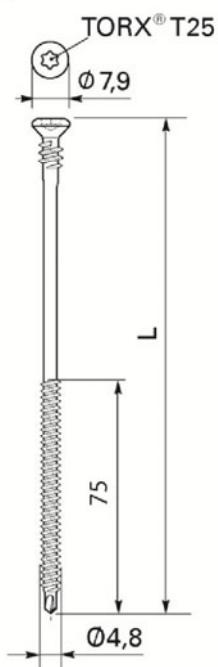




IRC/W-82x40

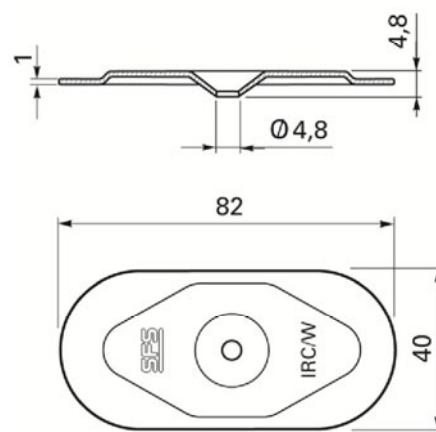

SFS intec flat roof fasteners

Combination 6
SFS intec IR2-C-4,8xL
SFS intec IRC/W-82x40




Annex 6

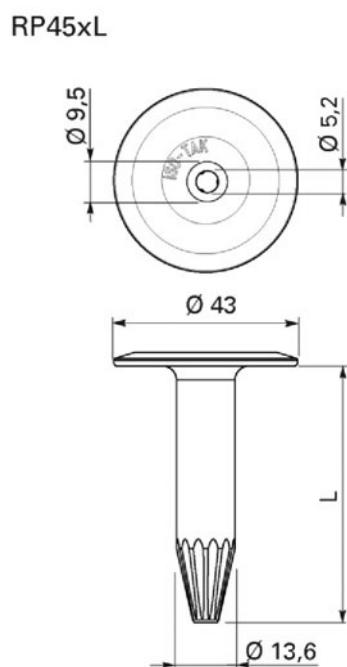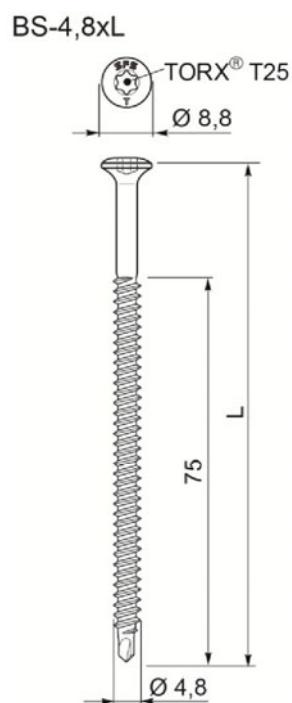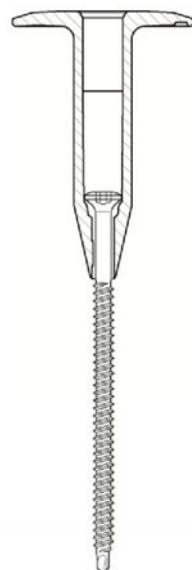

SFS intec flat roof fasteners

Combination 7
SFS intec BS-4,8xL
SFS intec RP45xL




Annex 7

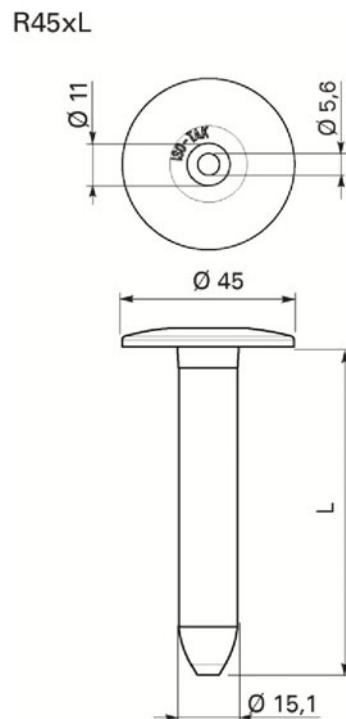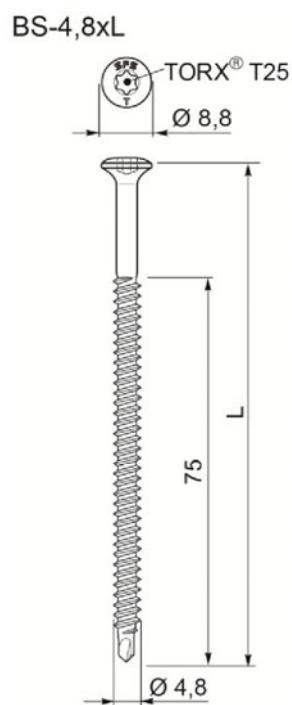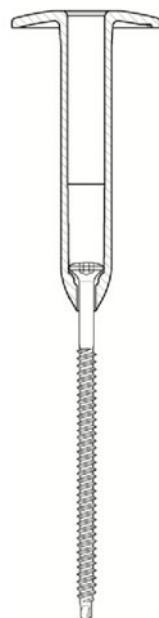

SFS intec flat roof fasteners

Combination 8
SFS intec BS-4,8xL
SFS intec R45xL




Annex 8

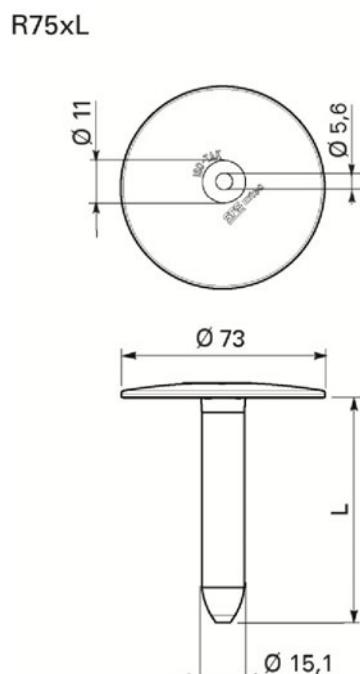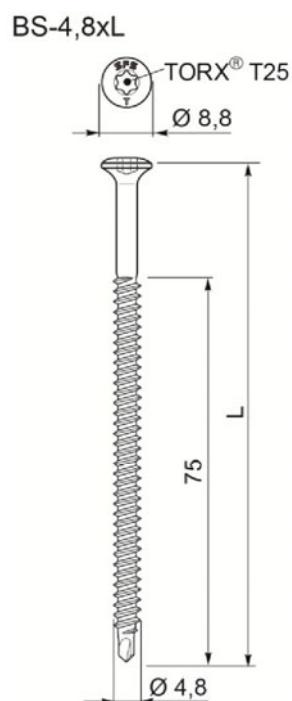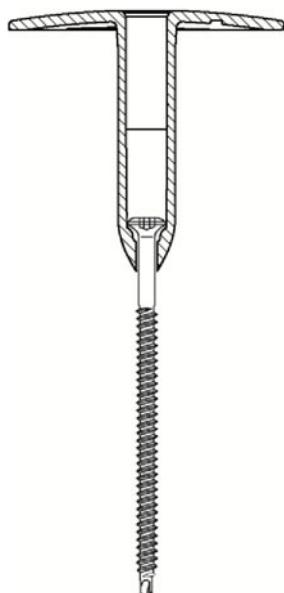

SFS intec flat roof fasteners

Combination 9
SFS intec BS-4,8xL
SFS intec R75xL


Annex 9

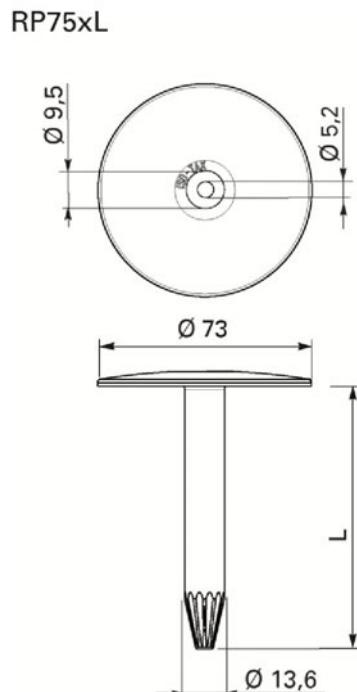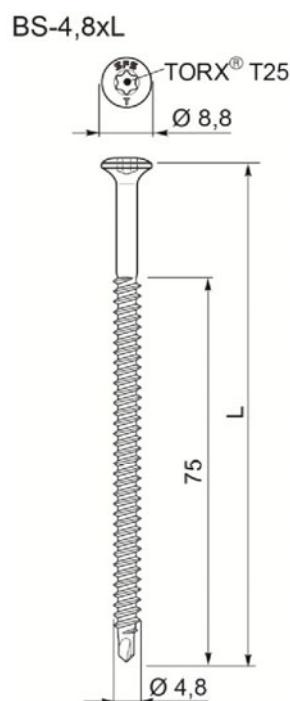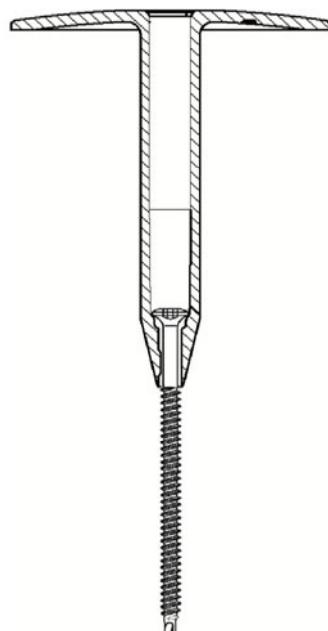


SFS intec flat roof fasteners

Combination 10
SFS intec BS-4,8xL
SFS intec RP75xL


Annex 10

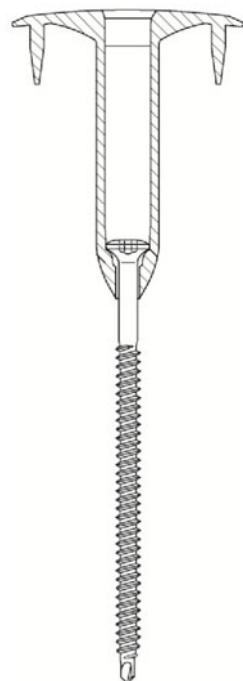

BS-4,8xL

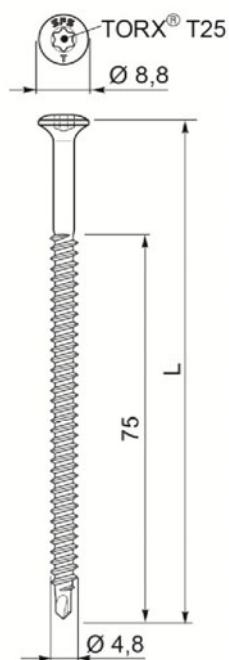


TPSxL

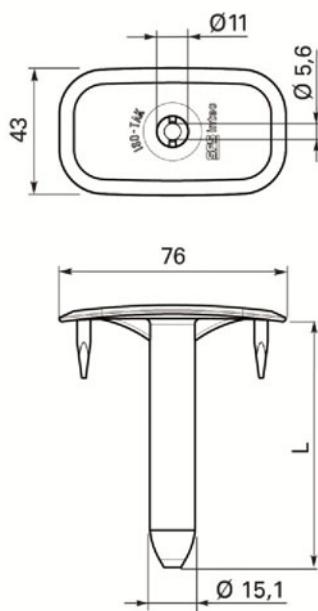


SFS intec flat roof fasteners

Combination 11
SFS intec BS-4,8xL
SFS intec TPSxL


Annex 11

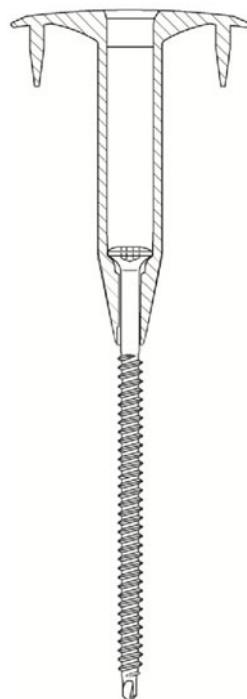

BS-4,8xL

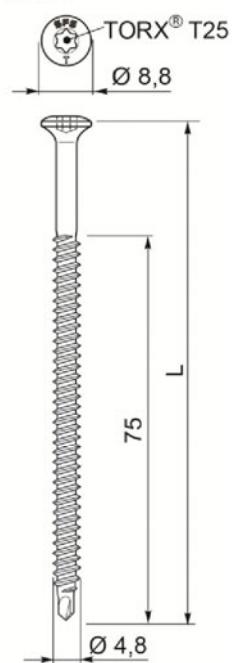




TPPxL

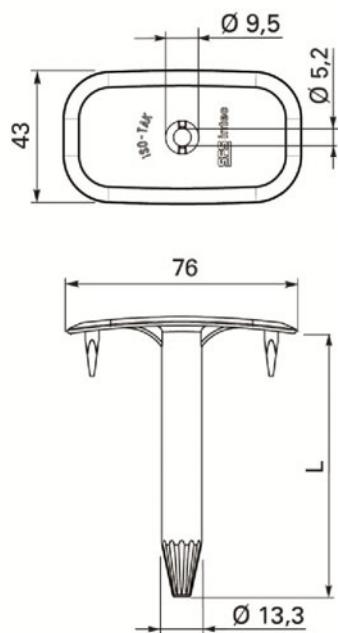

SFS intec flat roof fasteners

Combination 12
SFS intec BS-4,8xL
SFS intec TPPxL




Annex 12

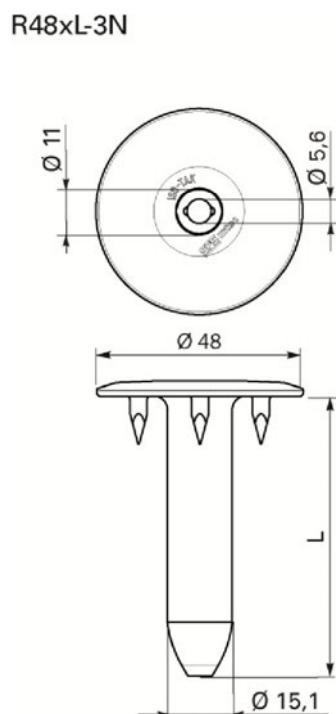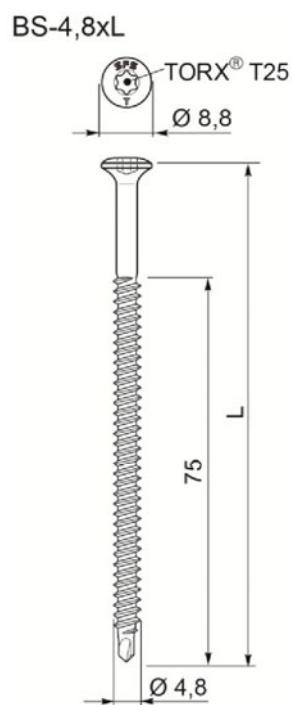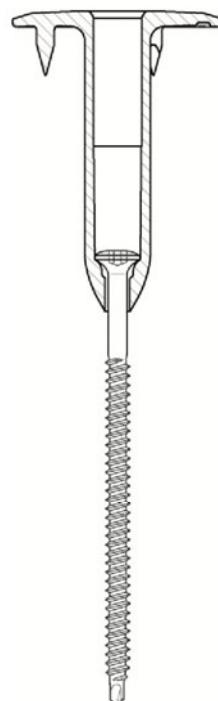

SFS intec flat roof fasteners

Combination 13
SFS intec BS-4,8xL
SFS intec R48xL-3N



Annex 13

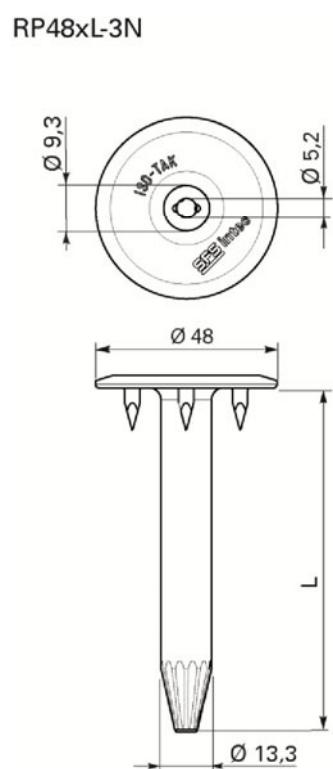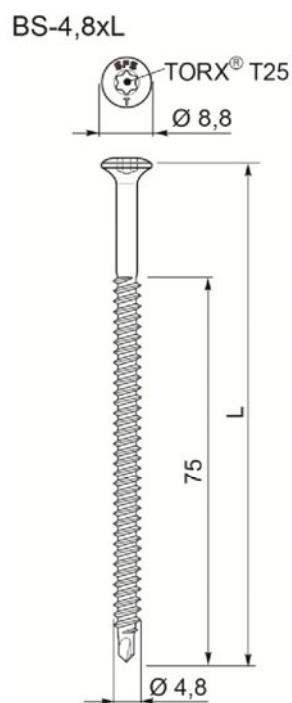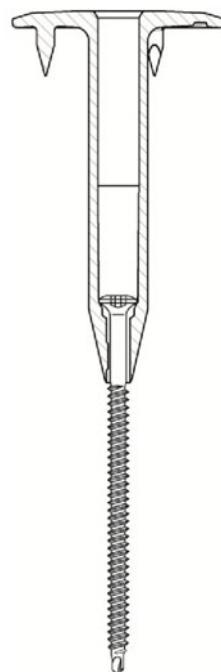


SFS intec flat roof fasteners

Combination 14
SFS intec BS-4,8xL
SFS intec RP48xL-3N

Annex 14

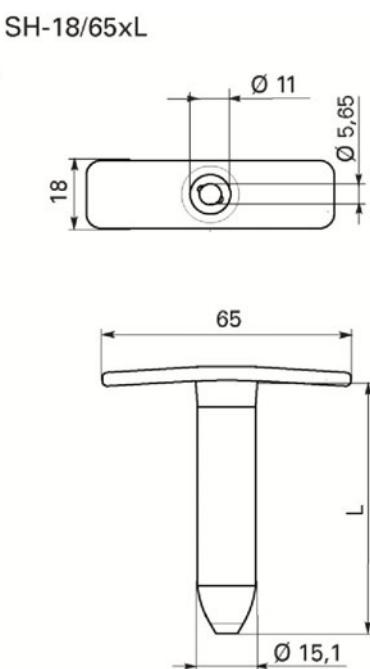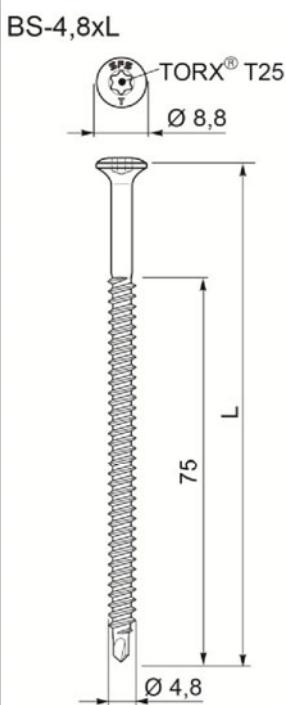




Protan steel bar

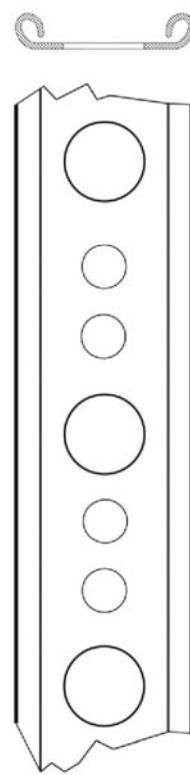

SFS intec flat roof fasteners

Combination 15
SFS intec BS-4,8xL
SFS intec SH-18/65xL
Protan steel bar




Annex 15

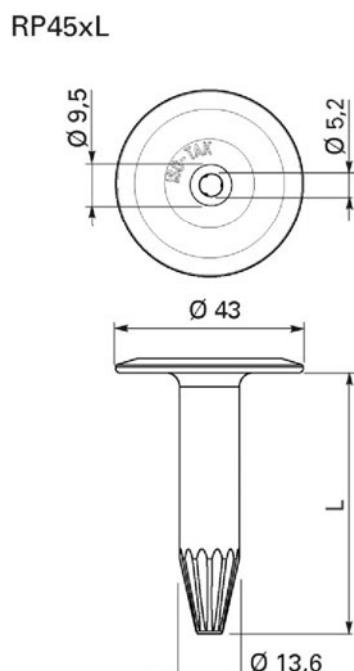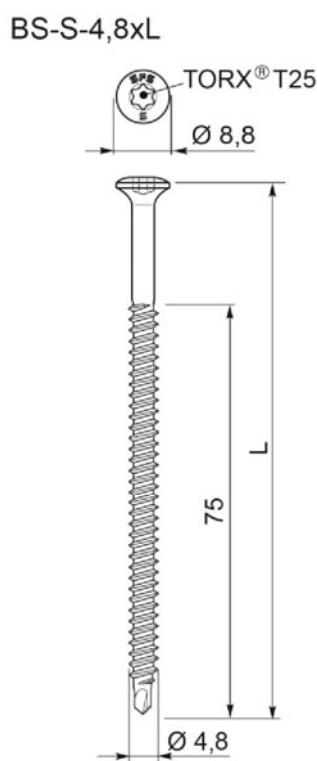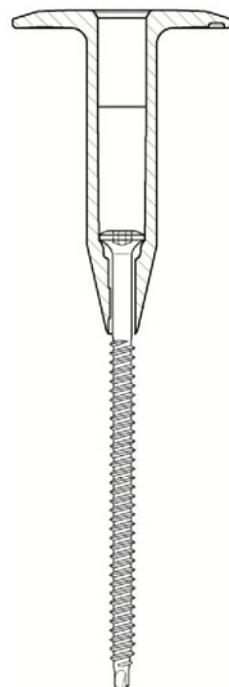

SFS intec flat roof fasteners

Combination 16
SFS intec BS-S-4,8xL
SFS intec RP45xL


Annex 16

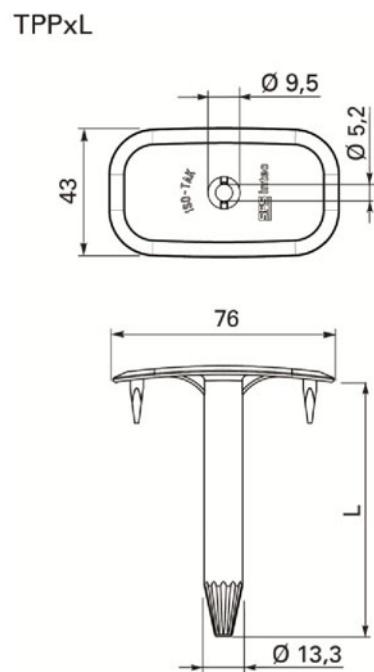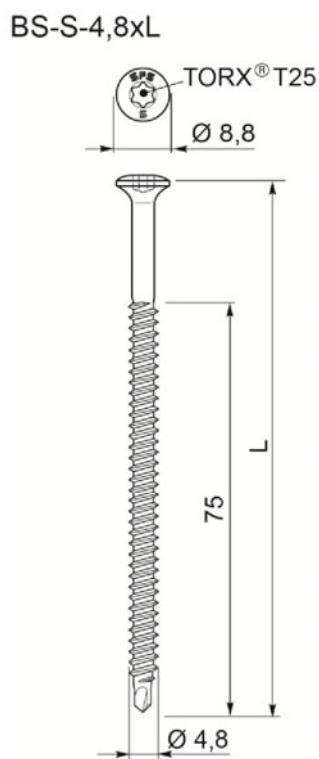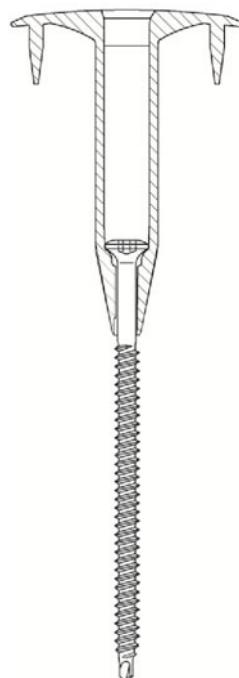


SFS intec flat roof fasteners

Combination 17
SFS intec BS-S-4,8xL
SFS intec TPPxL


Annex 17

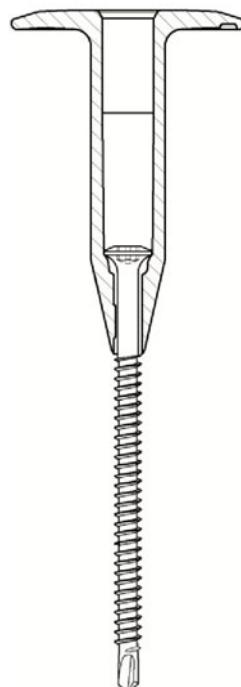

BS3-4,8xL

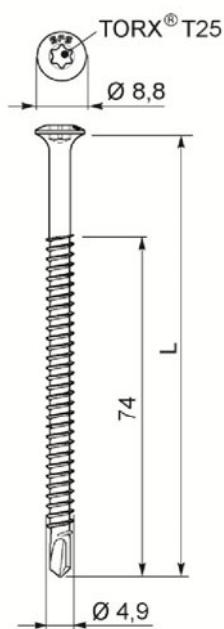


RP45xL

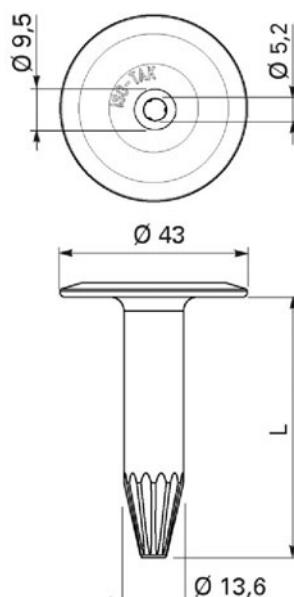


SFS intec flat roof fasteners

Combination 18
SFS intec BS3-4,8xL
SFS intec RP45xL


Annex 18



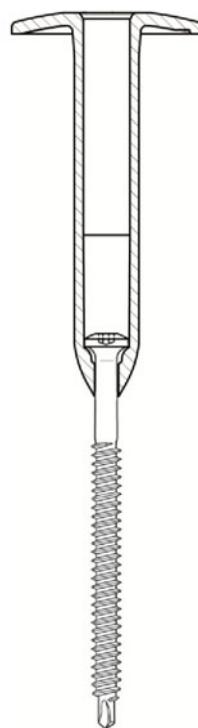


BS-6,1xL

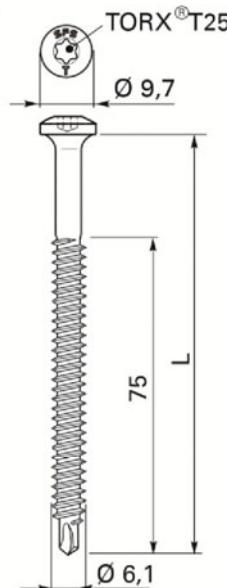

R45xL

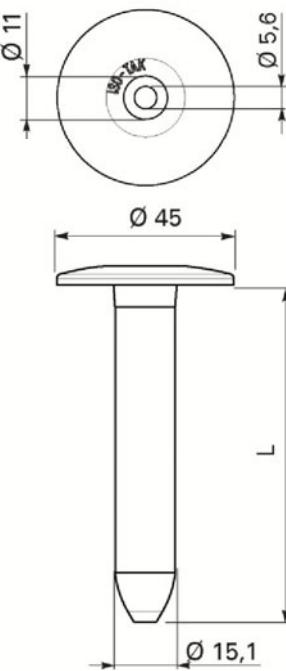


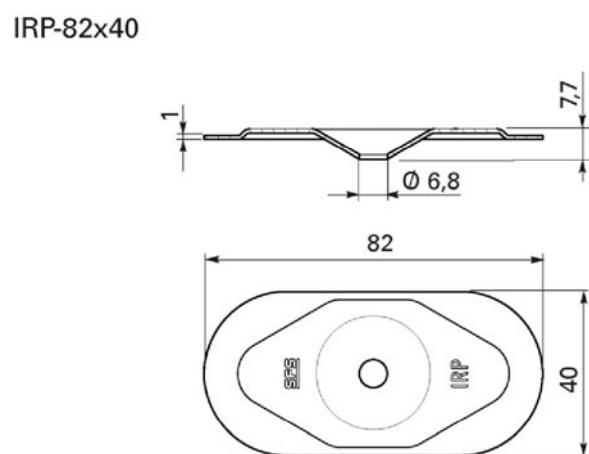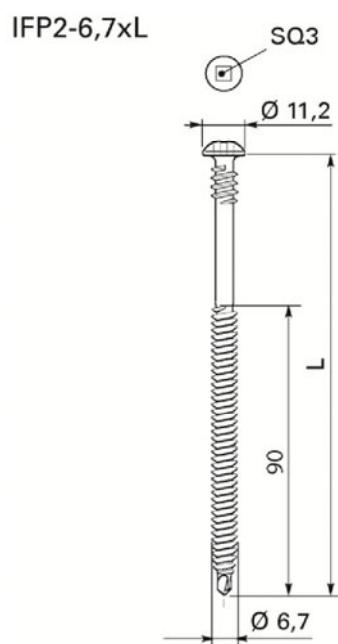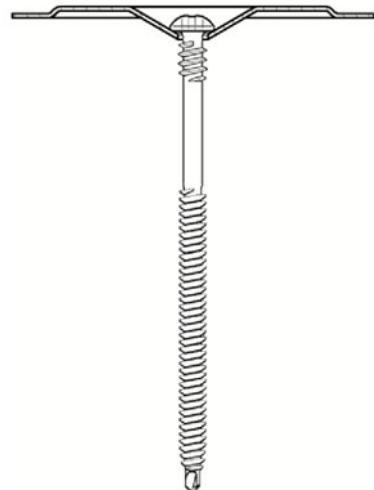


SFS intec flat roof fasteners

Combination 21
SFS intec IFP2-6,7xL
SFS intec IRP-82x40


Annex 21

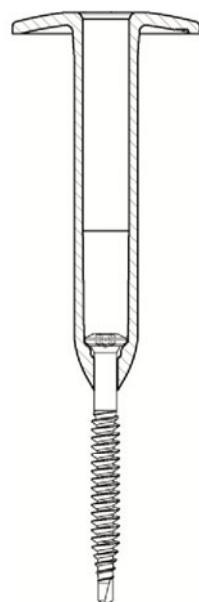

BS-6,7xL

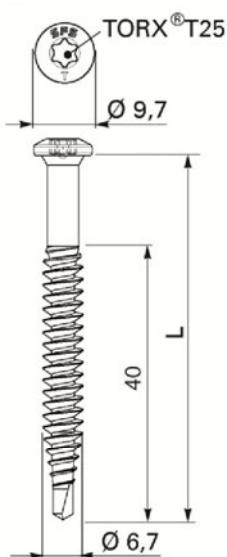


R45xL

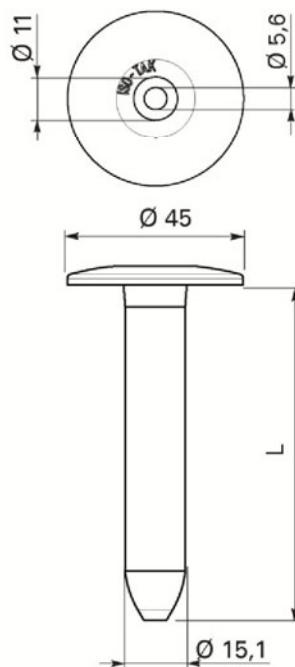


SFS intec flat roof fasteners

Combination 22
SFS intec BS-6,7xL
SFS intec R45xL


Annex 22

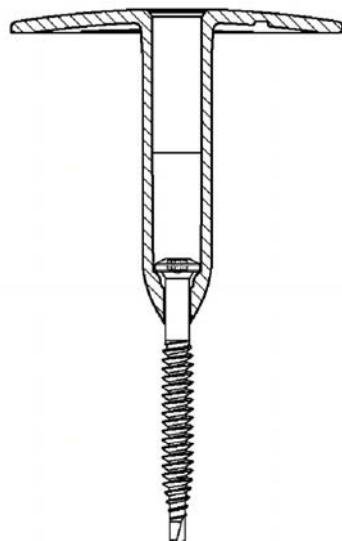

BS-6,7xL

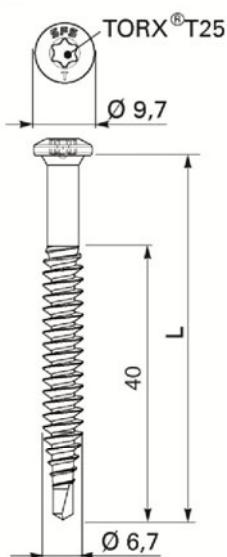


R75xL

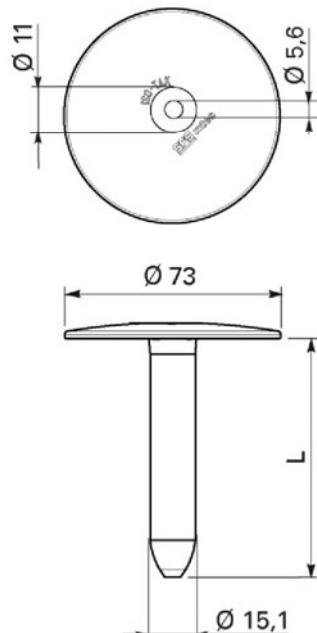


SFS intec flat roof fasteners

Combination 23
SFS intec BS-6,7xL
SFS intec R75xL


Annex 23

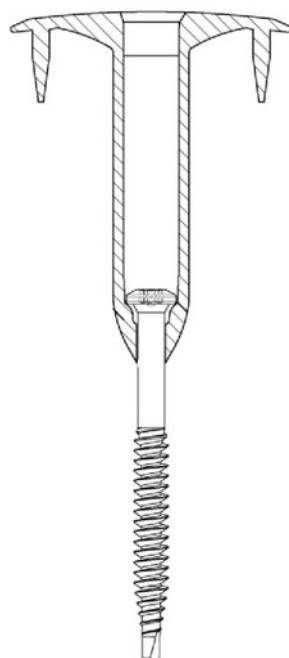

BS-6,7xL

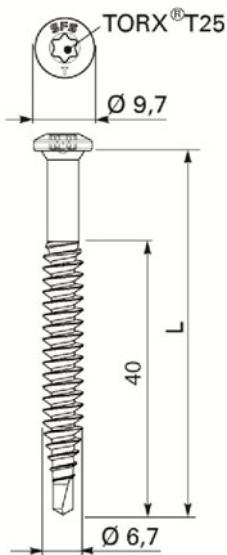


TPSxL

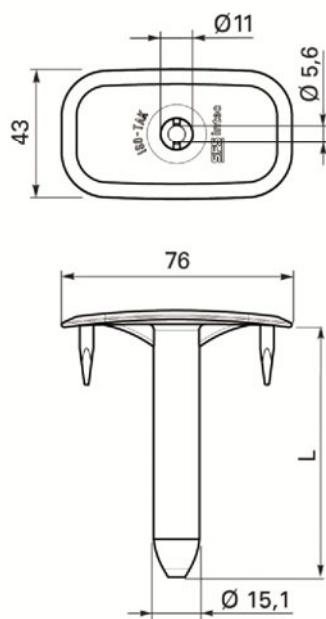


SFS intec flat roof fasteners

Combination 24
SFS intec BS-6,7xL
SFS intec TPSxL


Annex 24

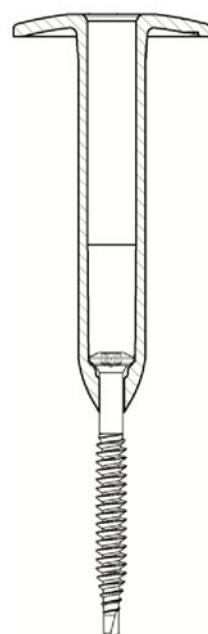


BS-S-6,7xL

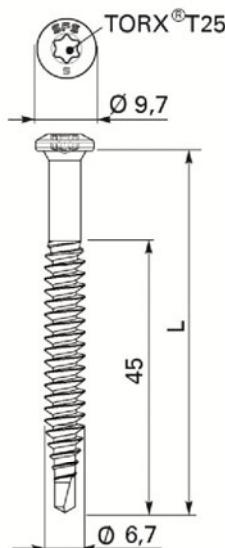


R45xL

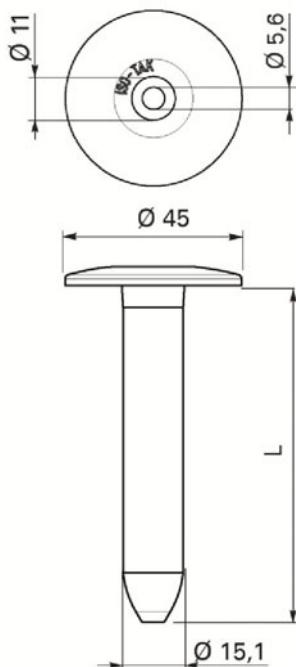


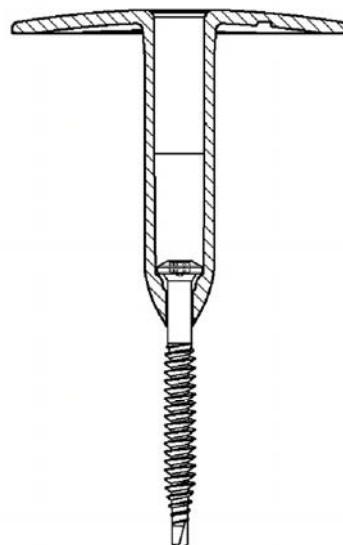

BS-S-6,7xL

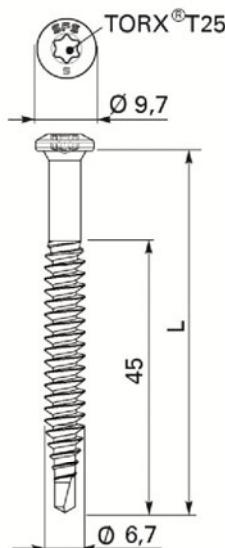


R75xL

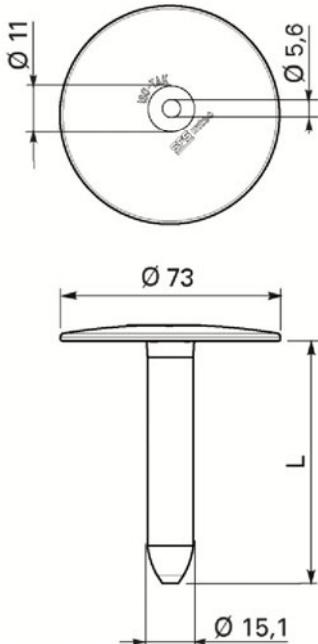


SFS intec flat roof fasteners

Combination 26
SFS intec BS-S-6,7xL
SFS intec R75xL


Annex 26

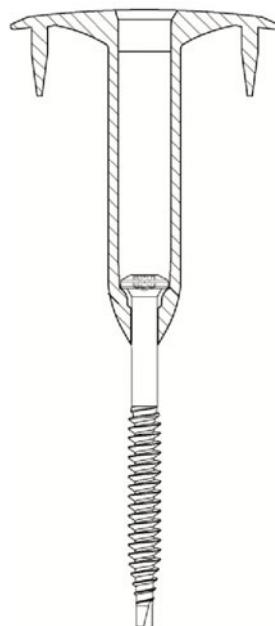

BS-S-6,7xL

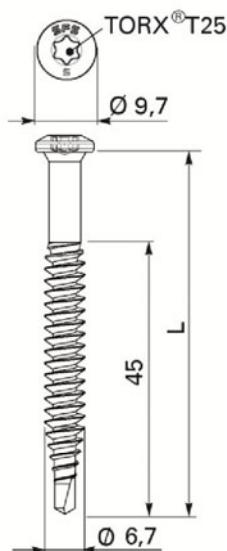


TPSxL

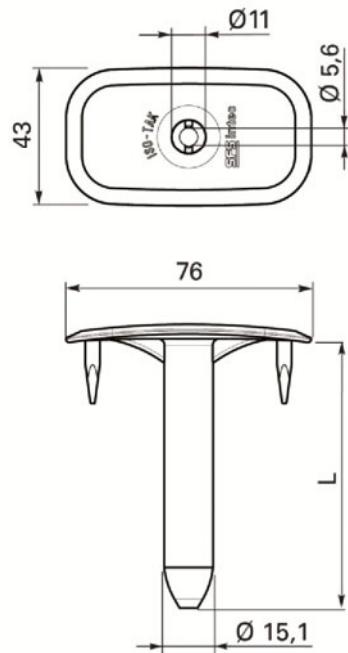


SFS intec flat roof fasteners

Combination 27
SFS intec BS-S-6,7xL
SFS intec TPSxL


Annex 27

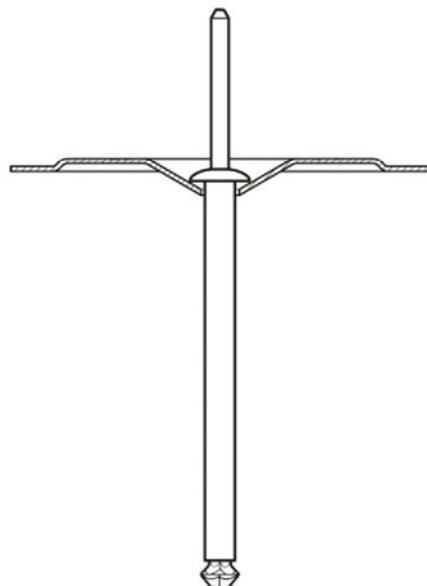


TPR-L-6,3xL

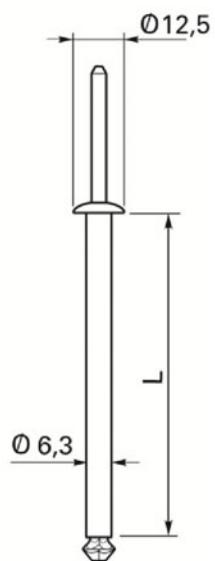


IRD-82x40

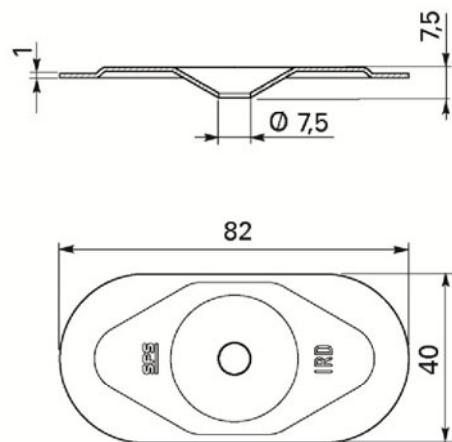


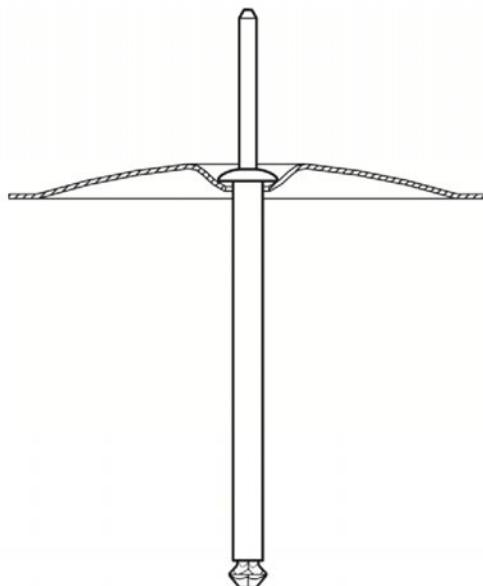


TPR-L-6,3xL

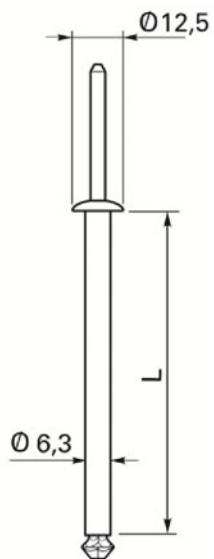


IE-C-82x40

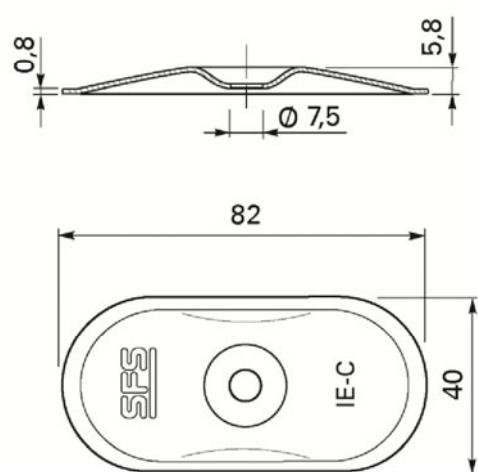


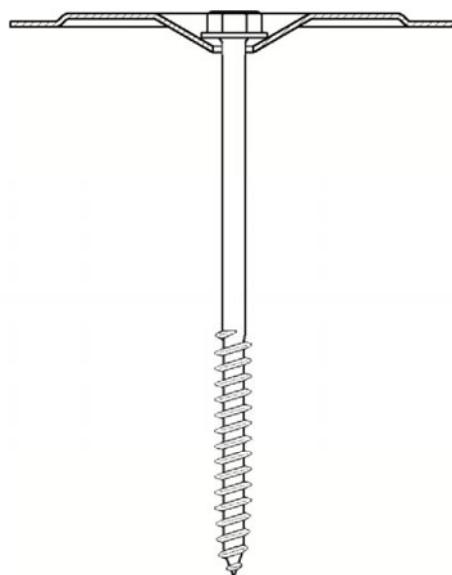


IG-6,0xL

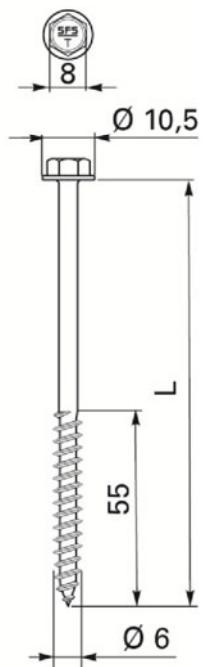


IRD-82x40

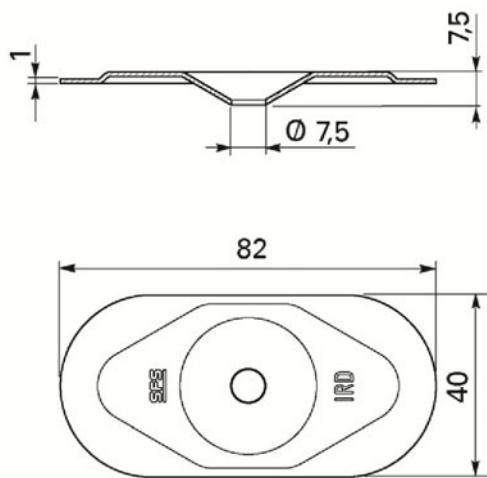

TS-T25-6,0xL

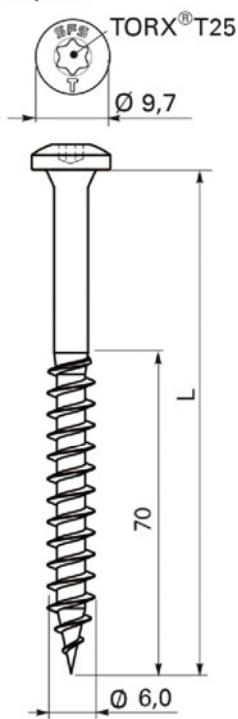


R45xL

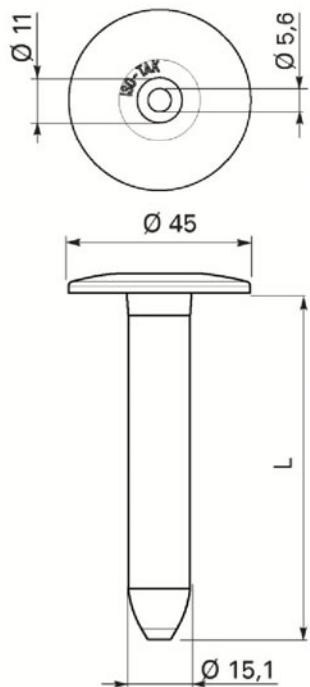


SFS intec flat roof fasteners

Combination 32
SFS intec TS-T25-6,0xL
SFS intec R45xL


Annex 32

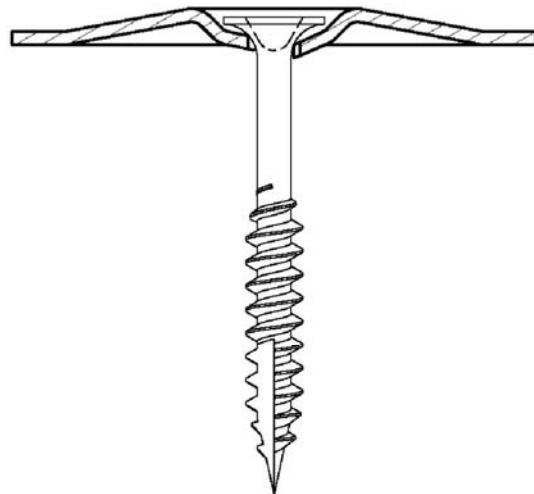

IWF-5,2xL

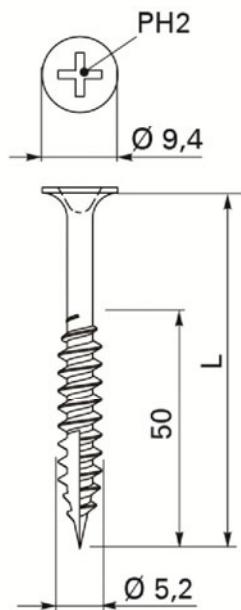


MW-40-FH

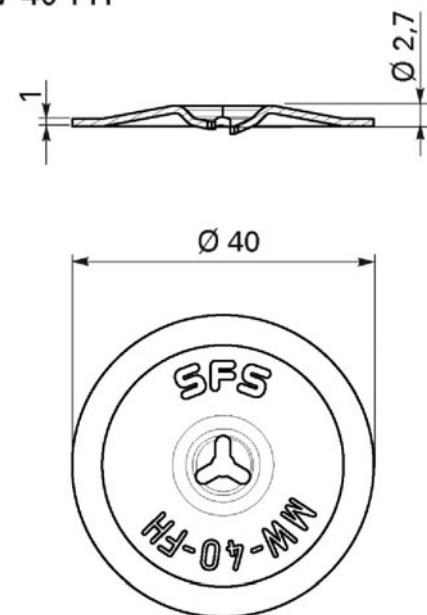


SFS intec flat roof fasteners

Combination 33
SFS intec IWF-5,2xL
SFS intec MW-40-FH


Annex 33

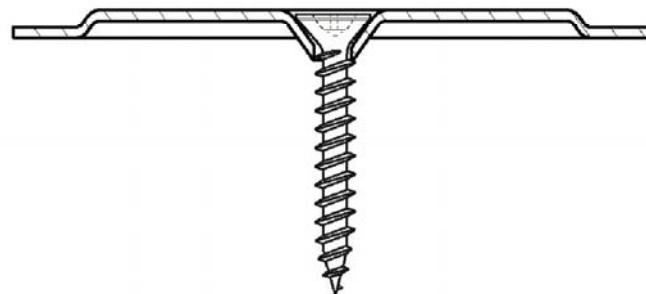


IW-T-5,0xL

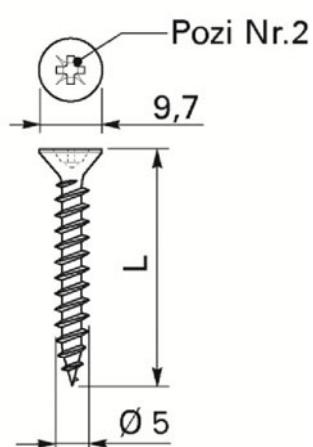


IRC/W-82x40

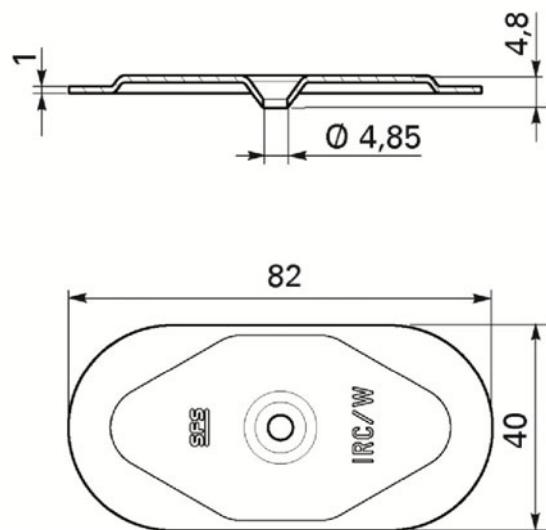


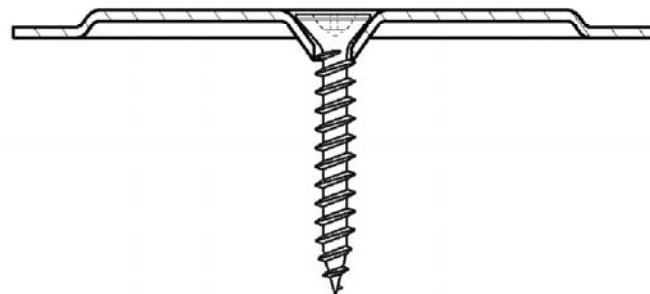


IW-S-5,0xL

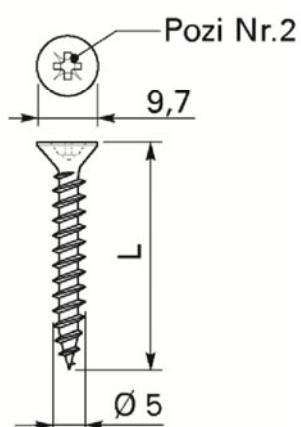


IRC/W-82x40

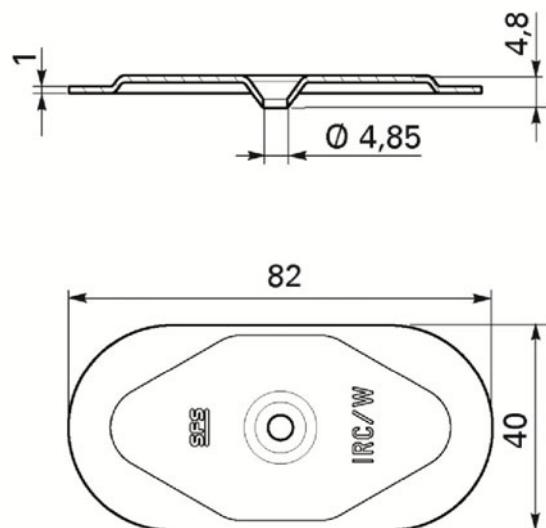


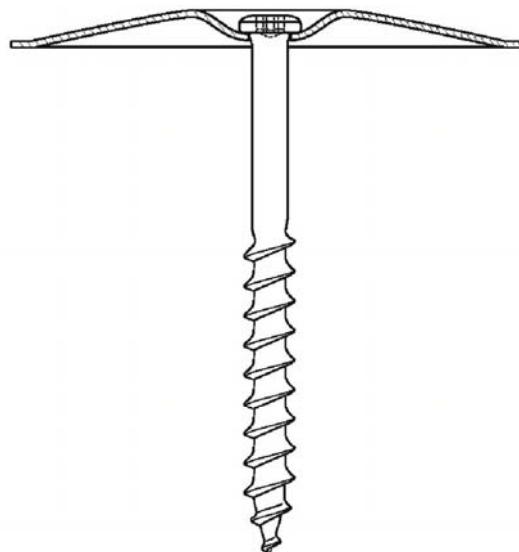


LBS-S-T25-8,0xL

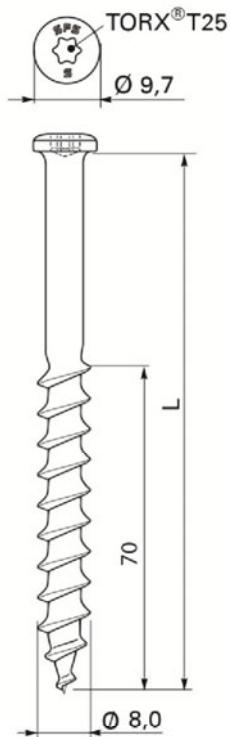


IE-C-82x40

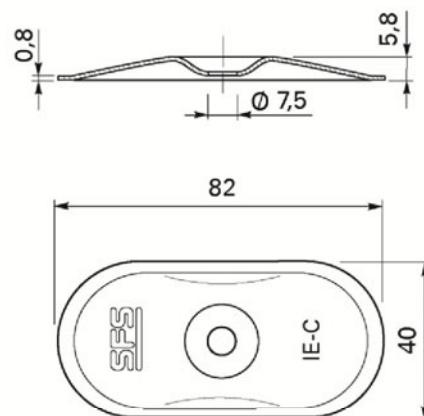


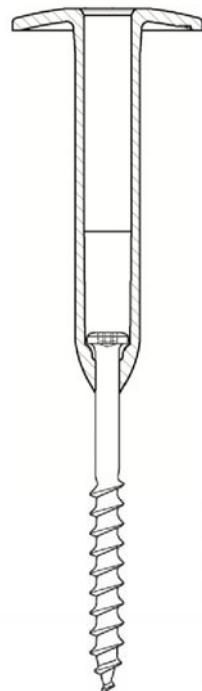

LBS-S-T25-8,0xL

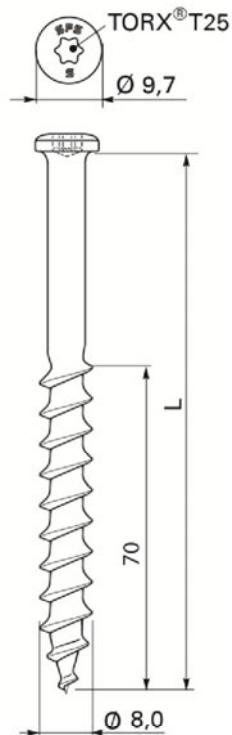


R45xL

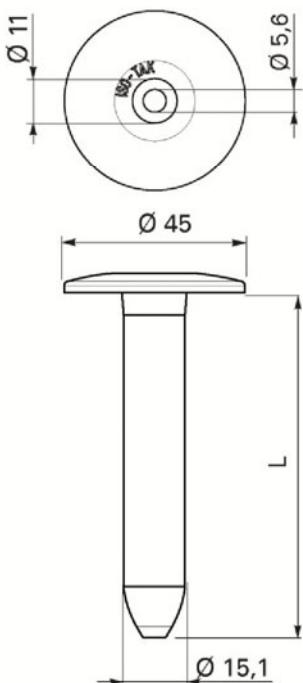


SFS intec flat roof fasteners

Combination 37
SFS intec LBS-S-T25-8,0xL
SFS intec R45xL


Annex 37

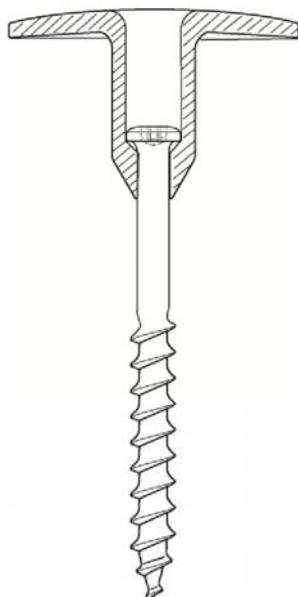


LBS-S-T25-8,0xL

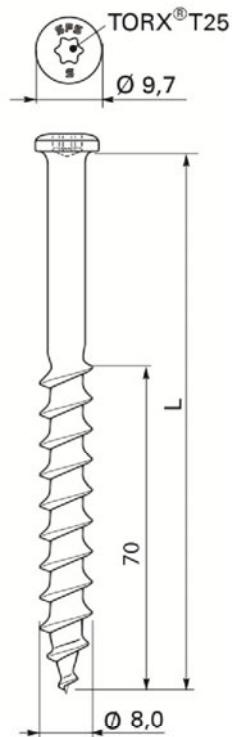


TC-50-30

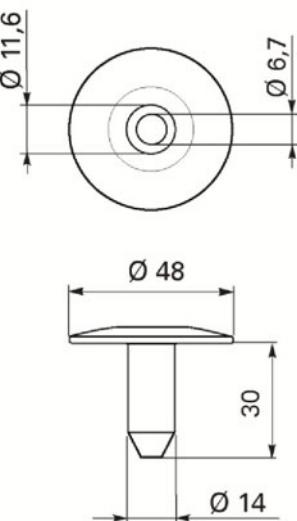


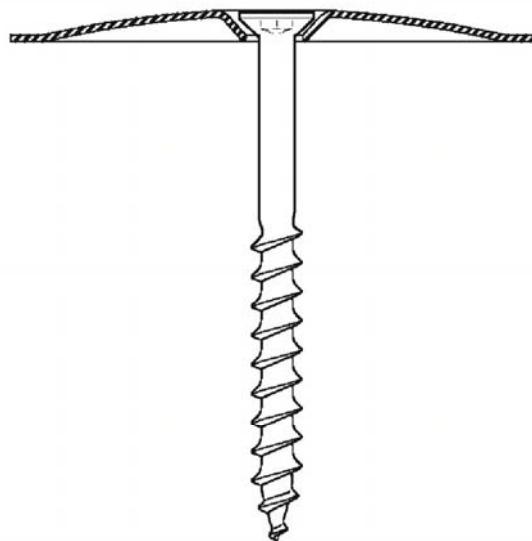

IGR-T-T25-8,0xL

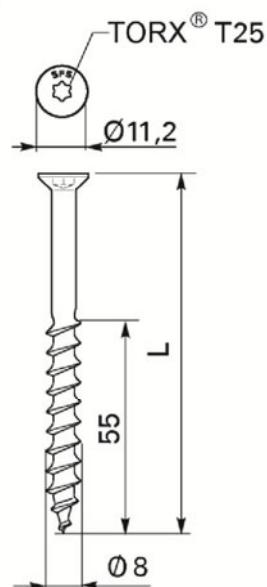


IG8-C-82x40

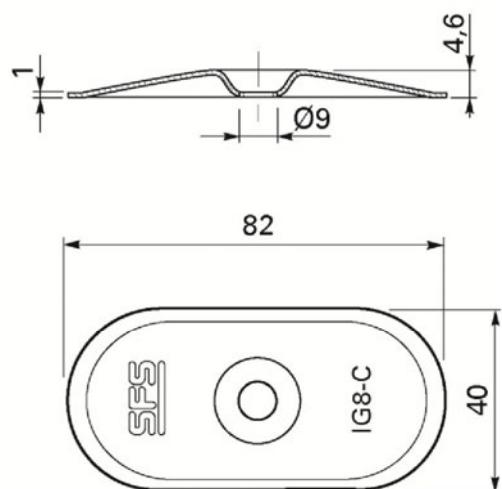


SFS intec flat roof fasteners

Combination 39
SFS intec IGR-T-T25-8,0xL
SFS intec IG8-C-82x40


Annex 39

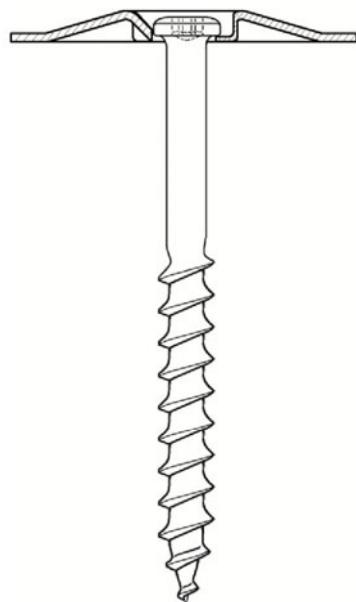

LBS-T25-8,0xL

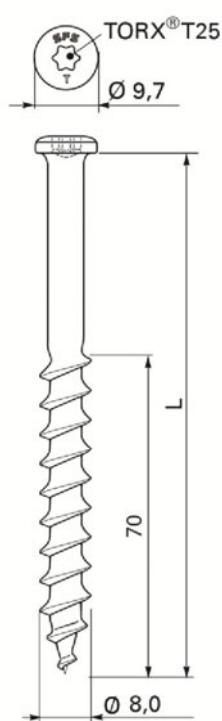


MW-40-LBS

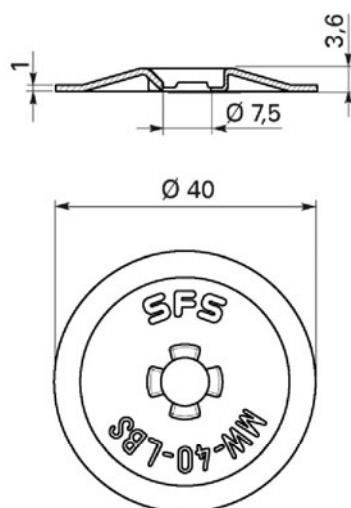


SFS intec flat roof fasteners

Combination 40
SFS intec LBS-T25-8,0xL
SFS intec MW-40-LBS


Annex 40

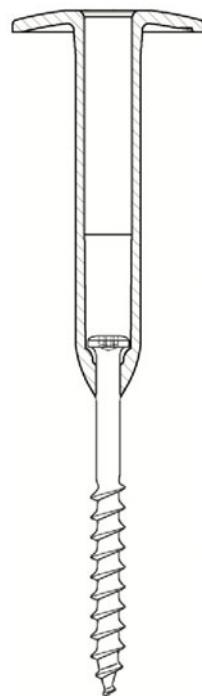

LBS-T25-8,0xL

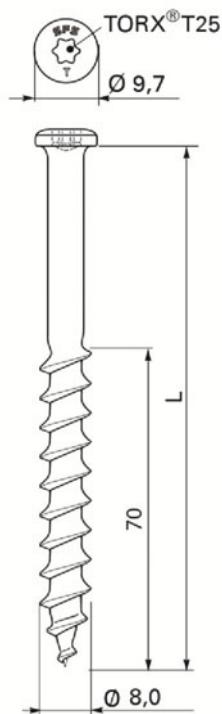

R45xL

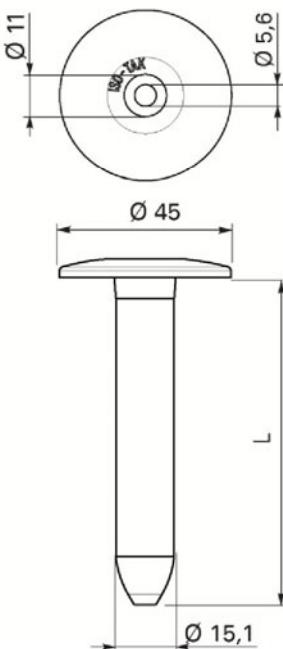



SFS intec flat roof fasteners

Combination 41
SFS intec LBS-T25-8,0xL
SFS intec R45xL


Annex 41

LB-45xL

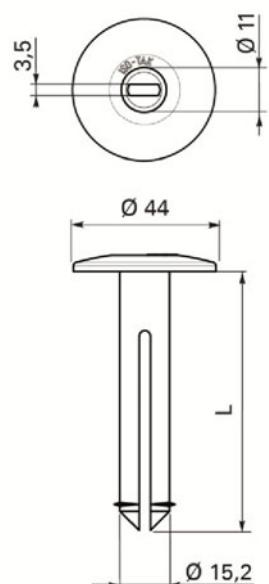


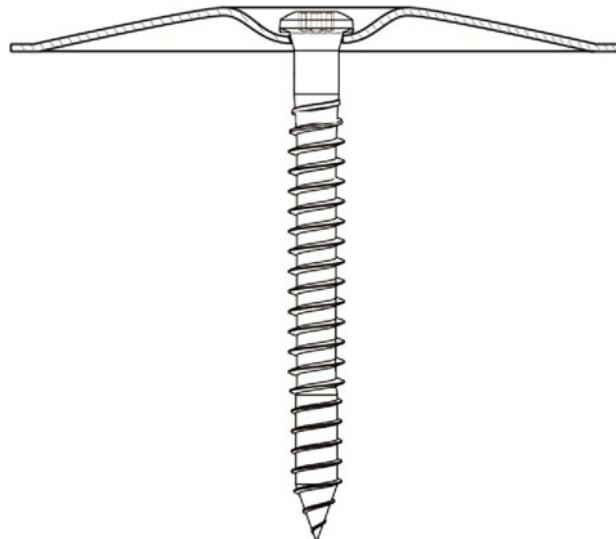


FB-S-T25-7,5xL

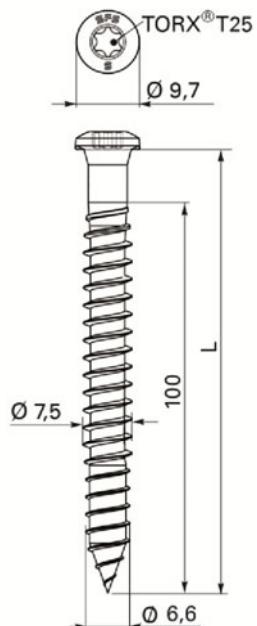


IE-C-82x40

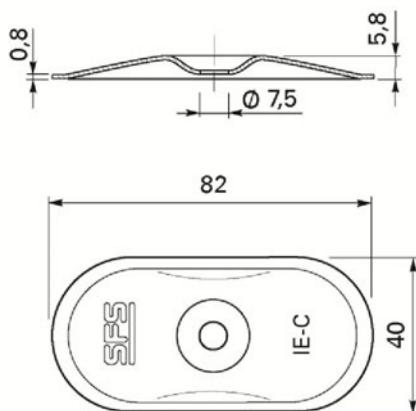


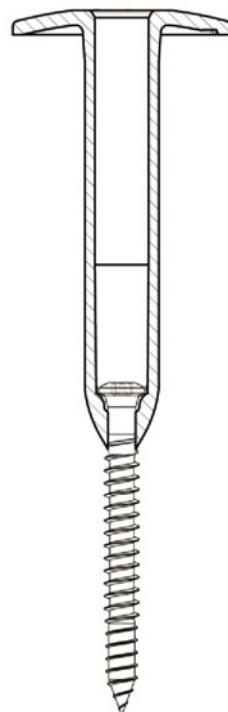


FB-S-T25-7,5xL

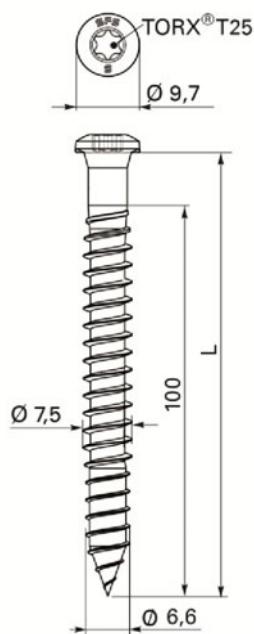


R45xL

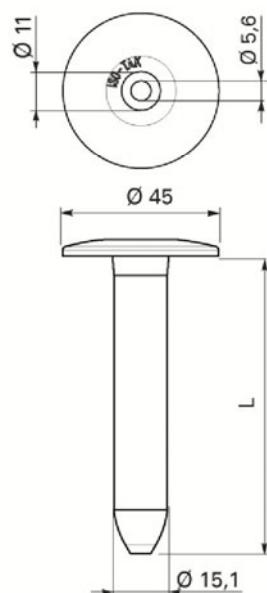


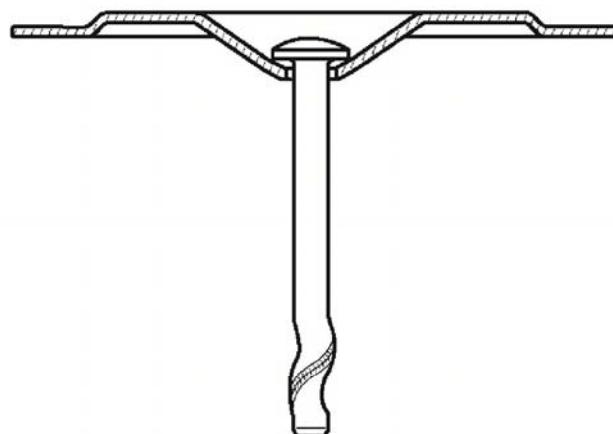

DT-4,8xL

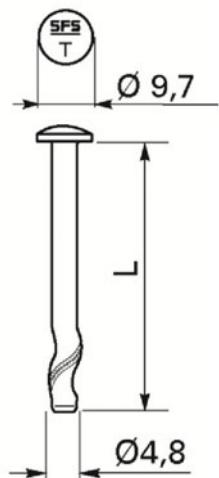


IRD-82x40

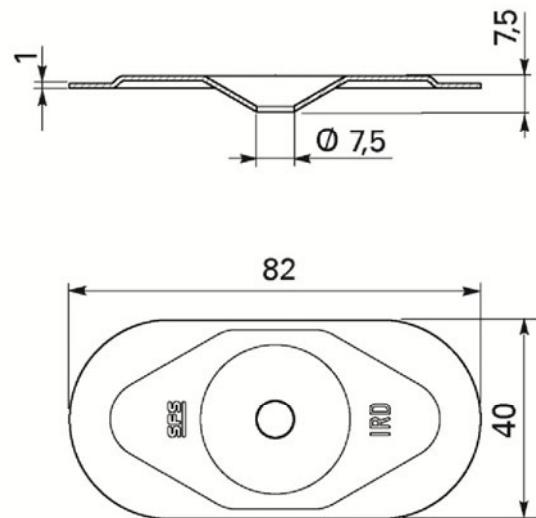


SFS intec flat roof fasteners

Combination 45
SFS intec DT-4,8xL
SFS intec IRD-82x40


Annex 45

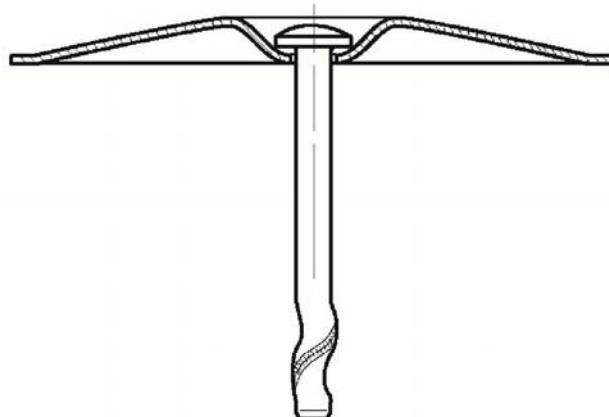


DT-4,8xL

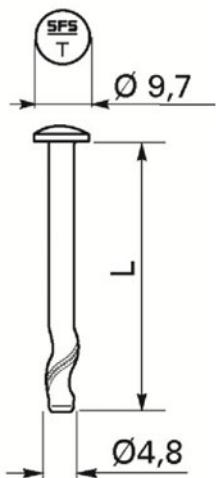


IF/IG-C-82x40

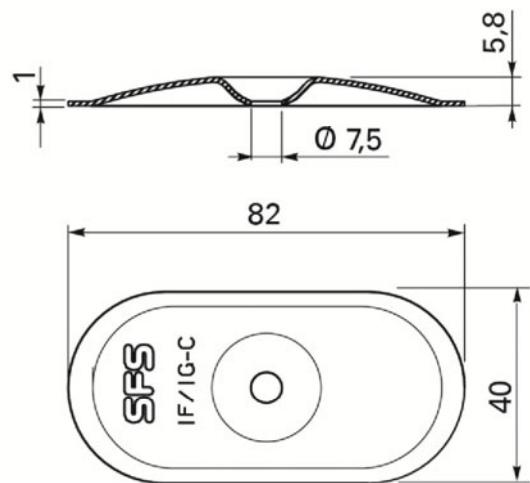


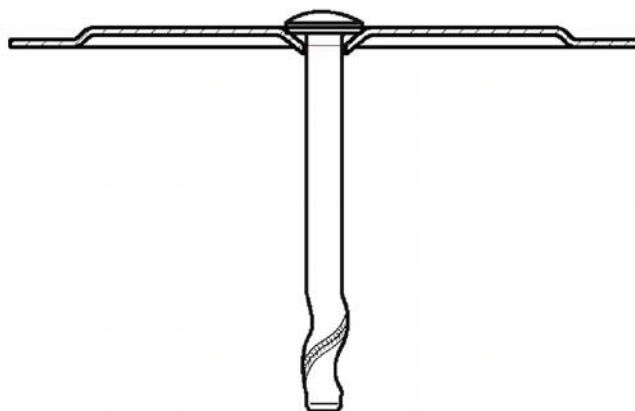


DT-4,8xL

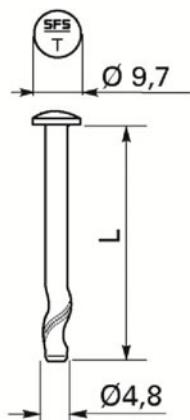


IW-82x40

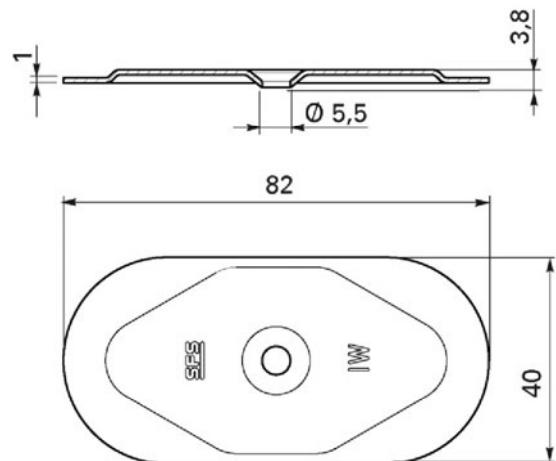


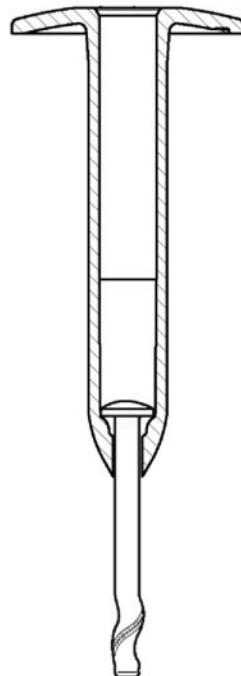

DT-4,8xL

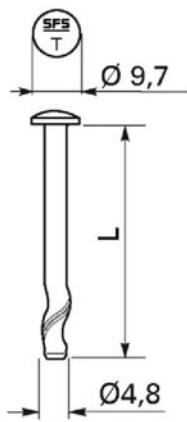


R45xL

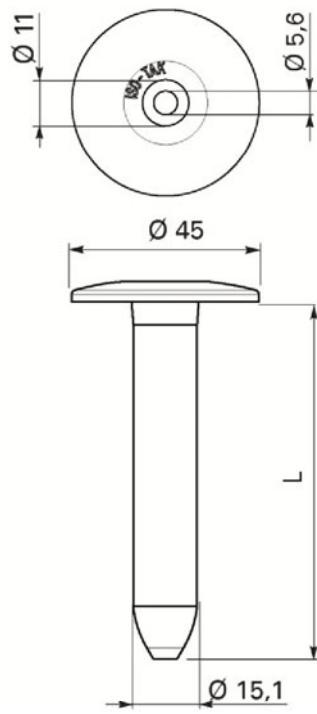


SFS intec flat roof fasteners

Combination 48
SFS intec DT-4,8xL
SFS intec R45xL


Annex 48

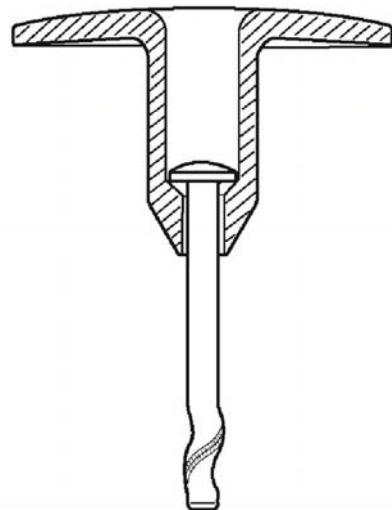

DT-4,8xL

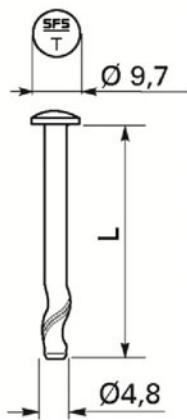


TC-50-30

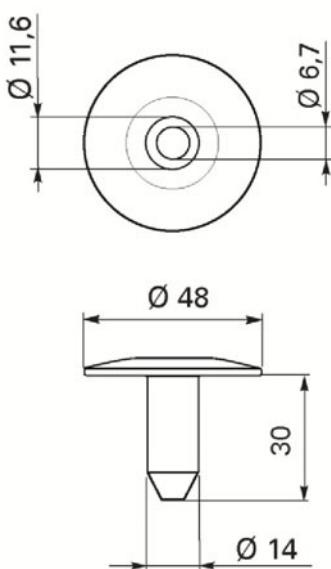


SFS intec flat roof fasteners

Combination 49
SFS intec DT-4,8xL
SFS intec TC-50-30


Annex 49

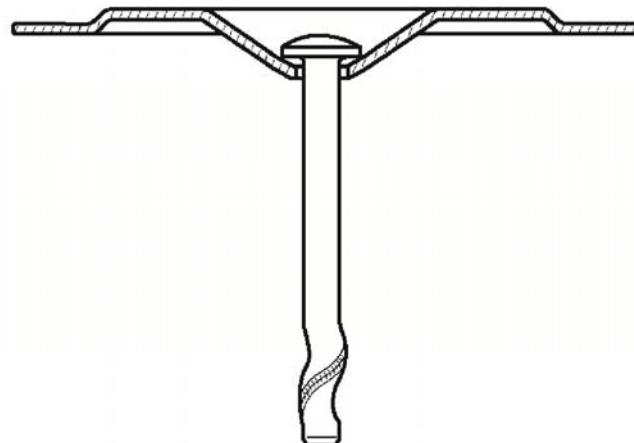


DT-S-4,8xL

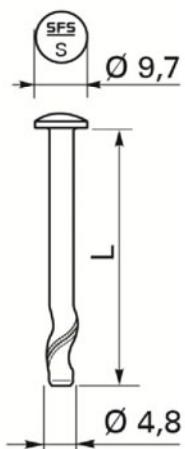


IRD-82x40

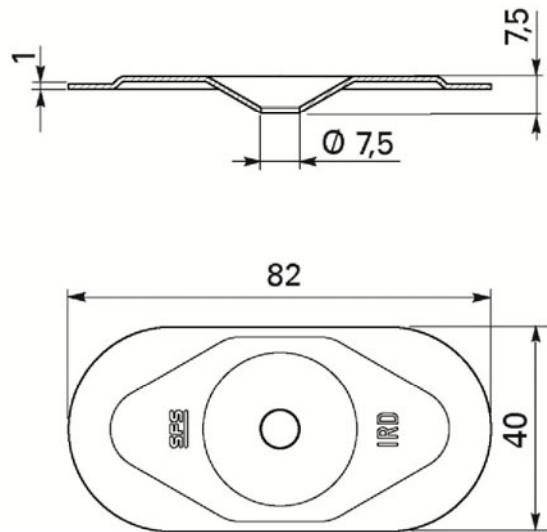


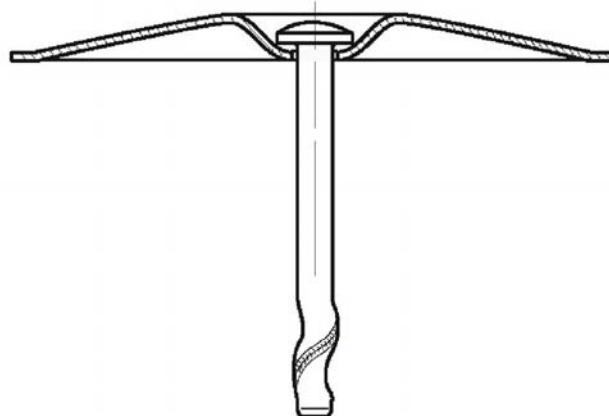


DT-S-4,8xL

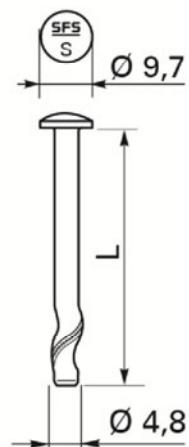


IF/IG-C-82x40

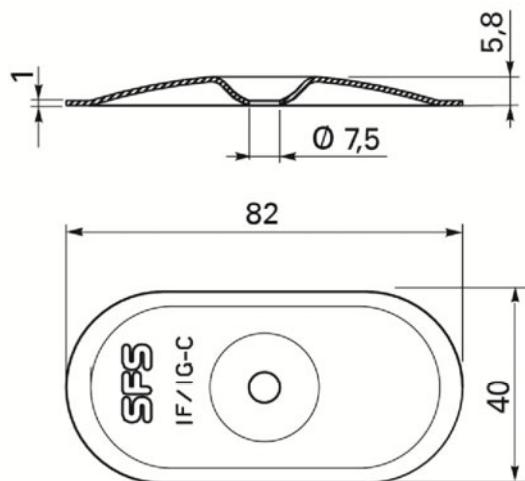


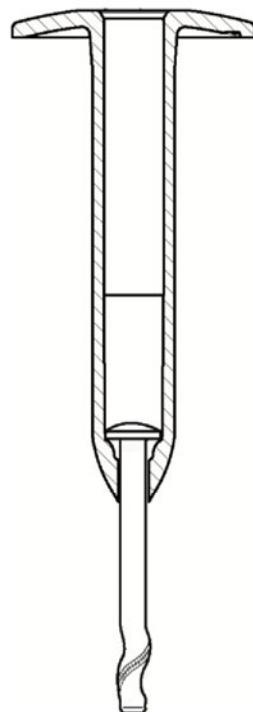


DT-S-4,8xL

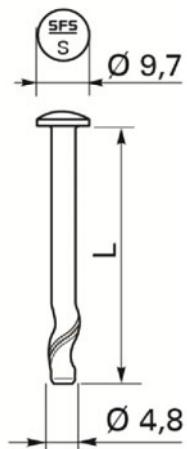


R45xL

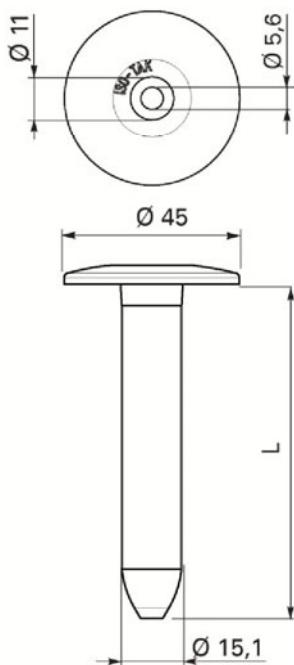


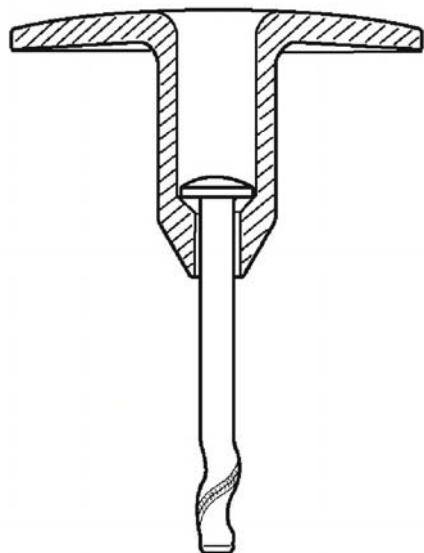


DT-S-4,8xL

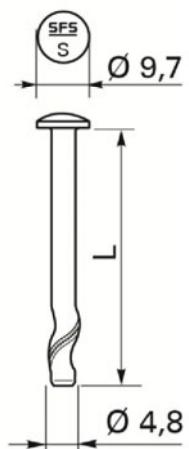


TC-50-30

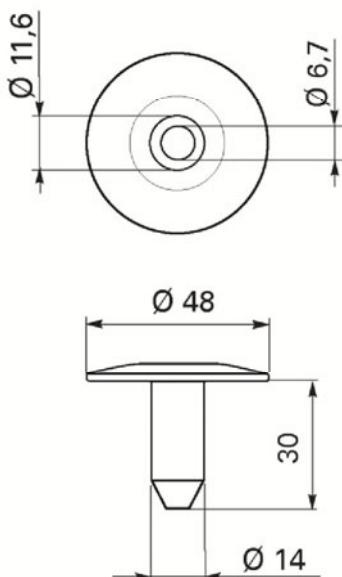


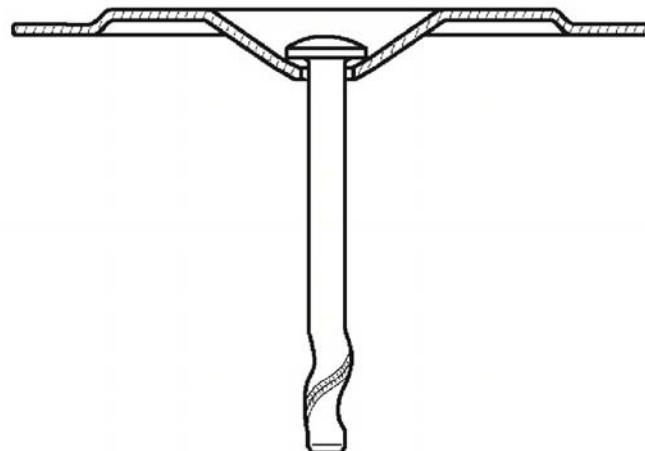


DT-6,3xL

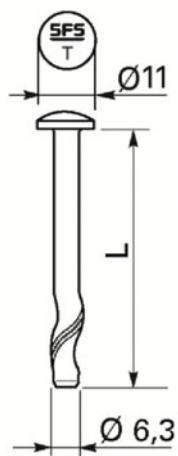


IRD-82x40

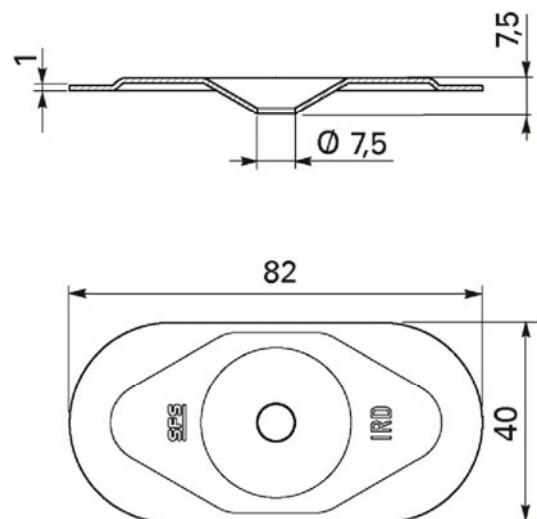


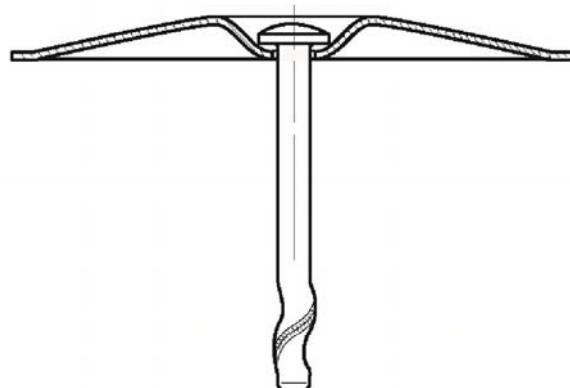


DT-6,3xL

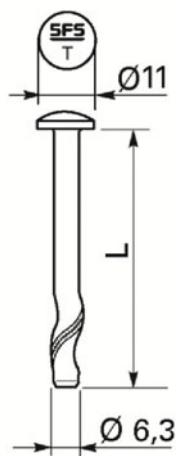


IF/IG-C-82x40

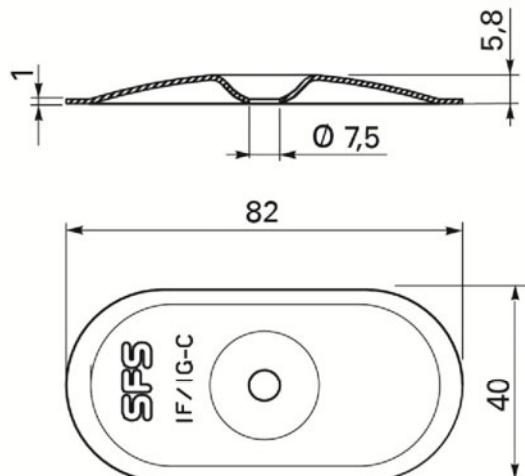


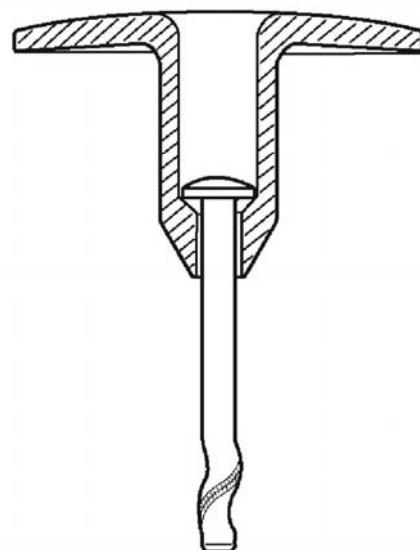


DT-6,3xL

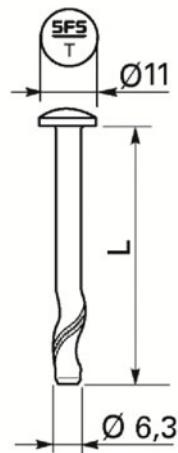


TC-50-30

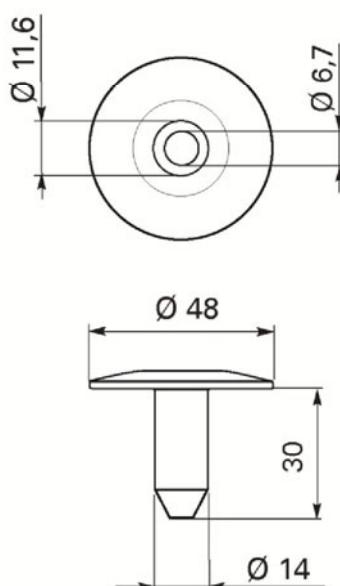


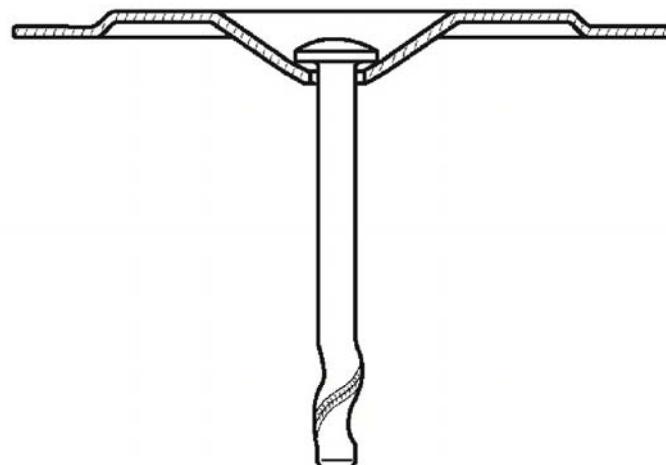


DT-S-6,3xL

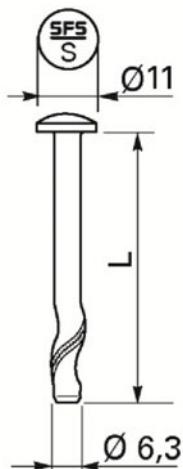


IRD-82x40

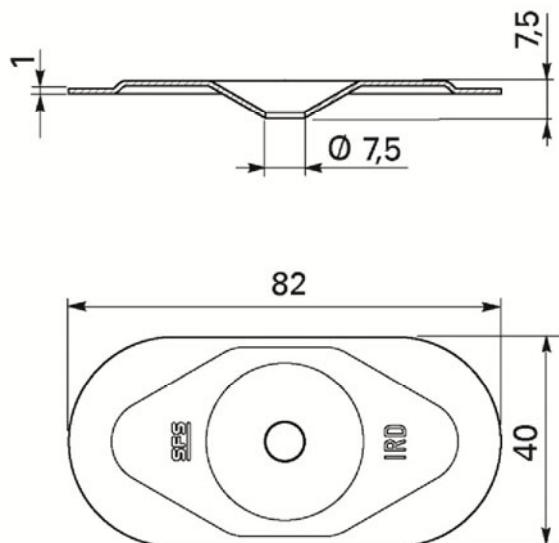


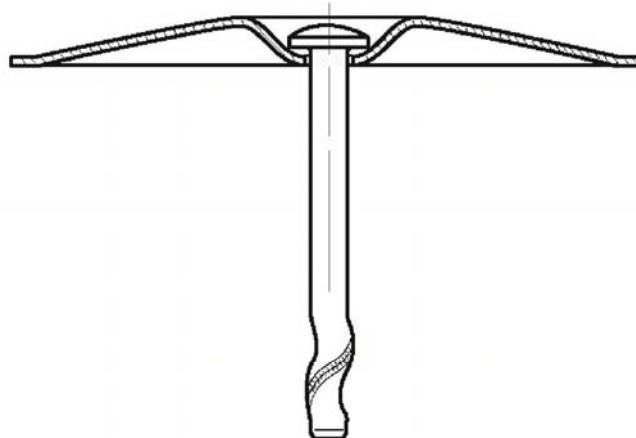


DT-S-6,3xL

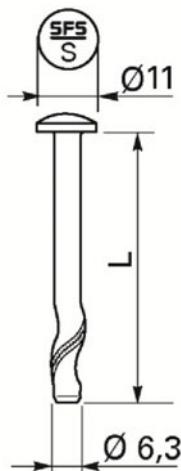


IF/IG-C-82x40

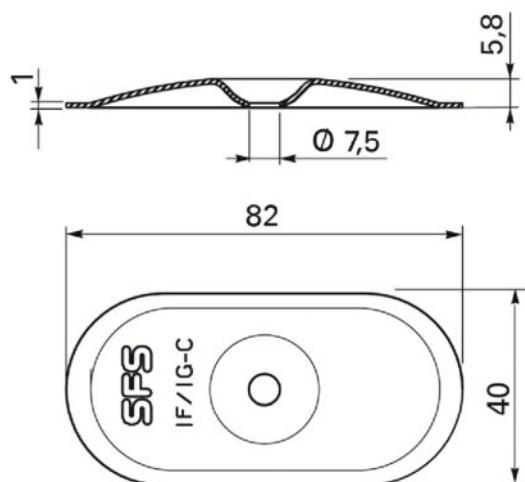


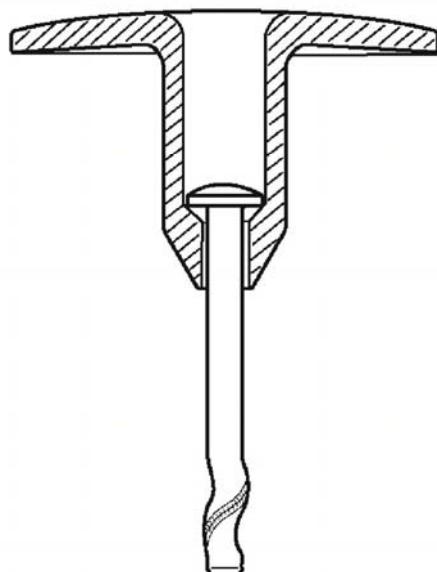


DT-S-6,3xL

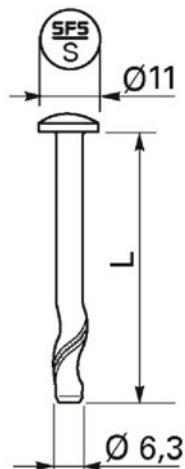


TC-50-30

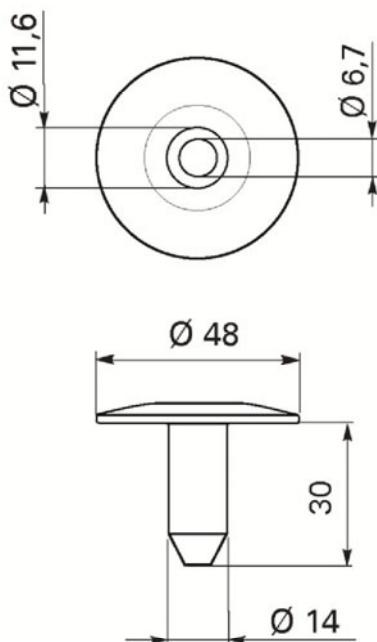


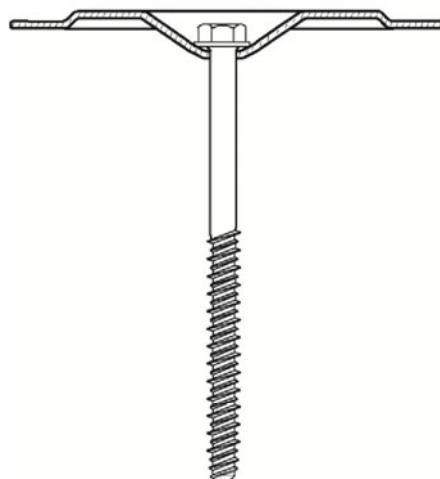


TI-6,3xL

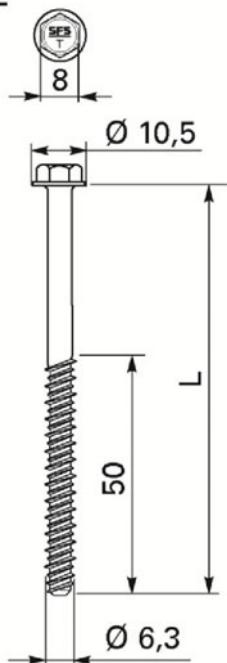


IRD-82x40

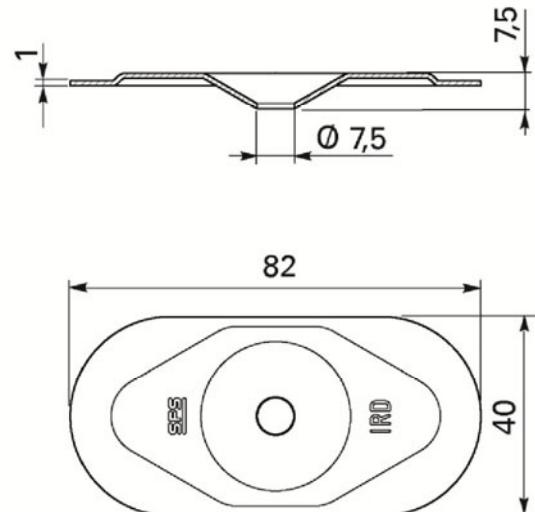


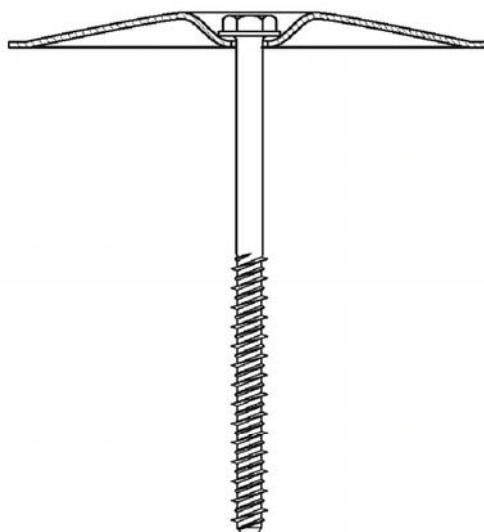


TI-6,3xL

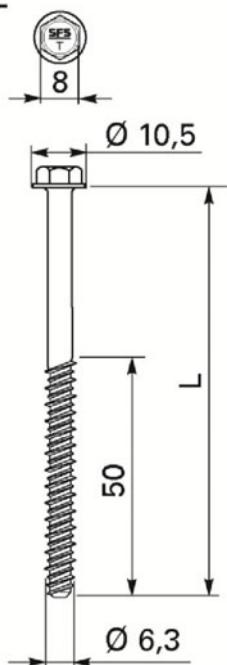


IF/IG-C-82x40

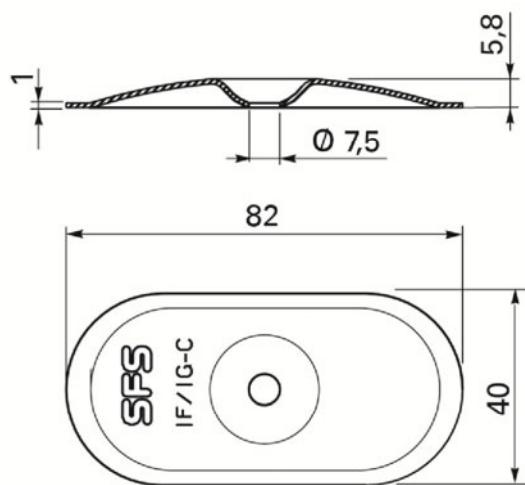


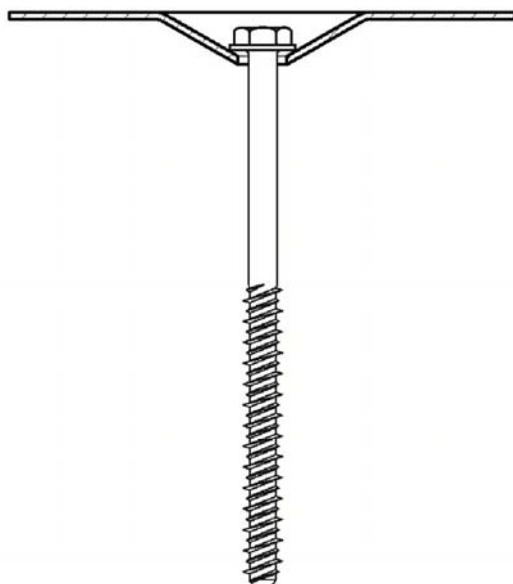

TI-6,3xL

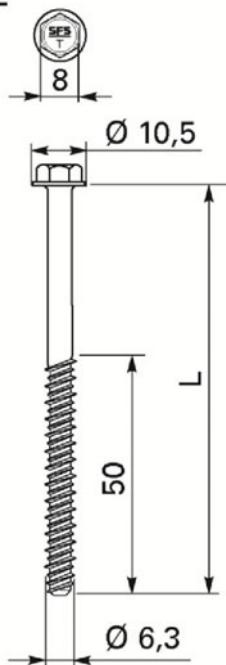

ID-70x70

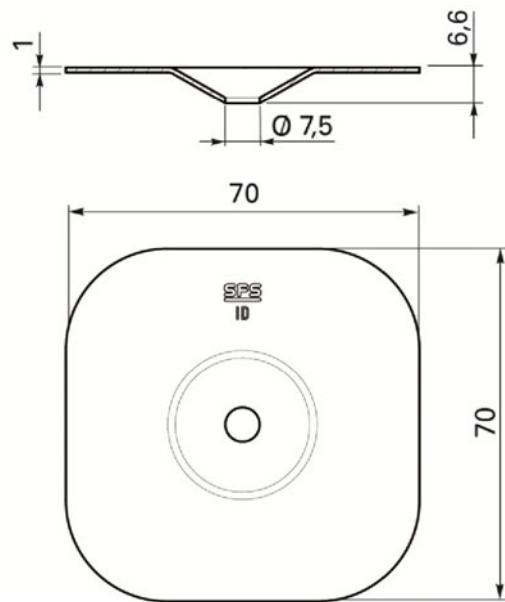


SFS intec flat roof fasteners


Combination 62
SFS intec TI-6,3xL
SFS intec ID-70x70

Annex 62

TI-T25-6,3xL

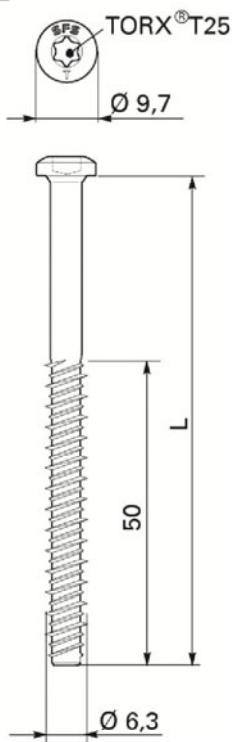


R75xL

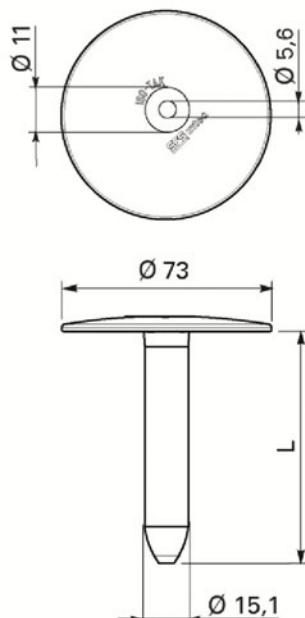


SFS intec flat roof fasteners

Combination 63
SFS intec TI-T25-6,3xL
SFS intec R75xL


Annex 63

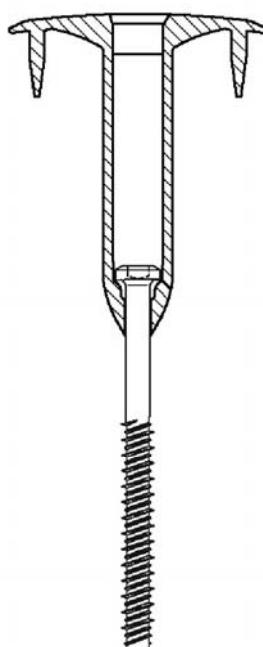

TI-T25-6,3xL

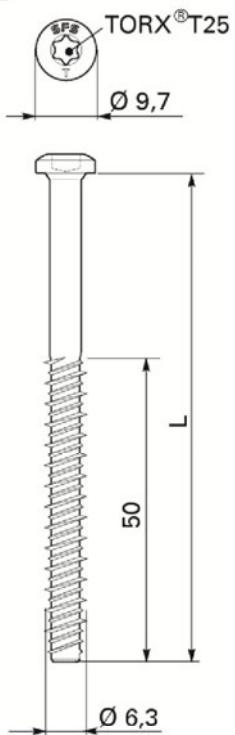


TPSxL

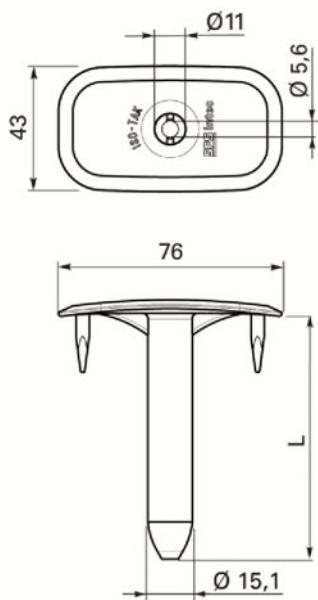


SFS intec flat roof fasteners

Combination 64
SFS intec TI-T25-6,3xL
SFS intec TPSxL


Annex 64

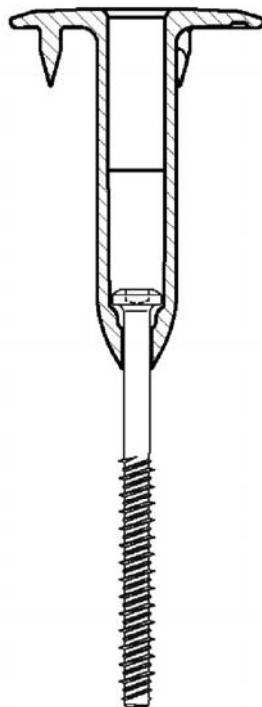

TI-T25-6,3xL

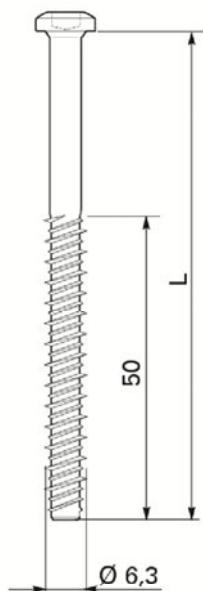


R48xL-3N

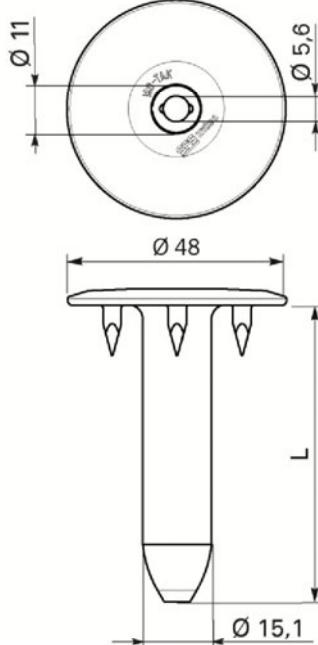


SFS intec flat roof fasteners

Combination 65
SFS intec TI-T25-6,3xL
SFS intec R48xL-3N


Annex 65

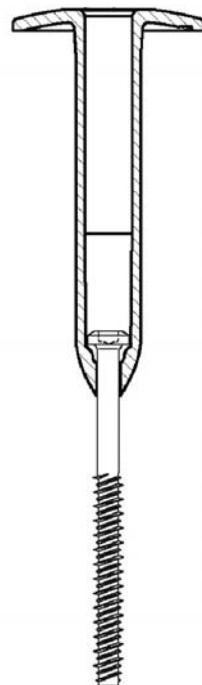

TI-T25-6,3xL

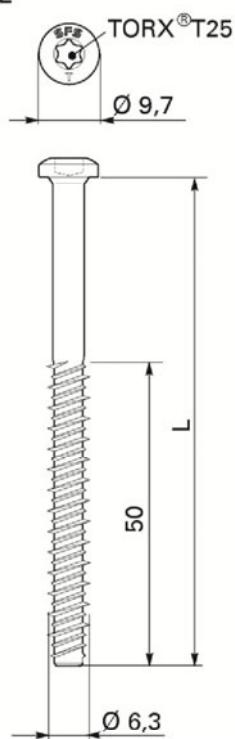


R45xL

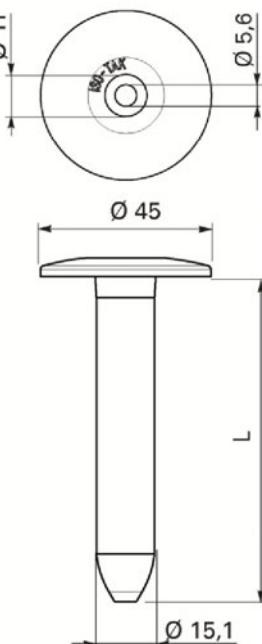


SFS intec flat roof fasteners

Combination 66
SFS intec TI-T25-6,3xL
SFS intec R45xL


Annex 66

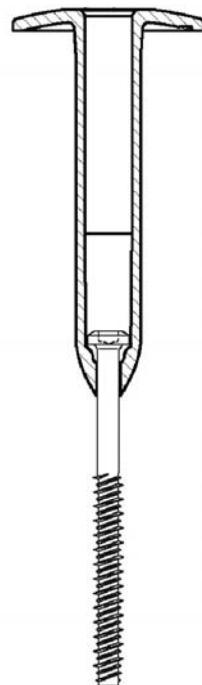

TI-S-T25-6,1xL

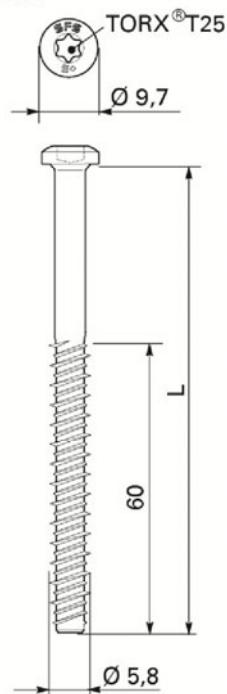

R45xL

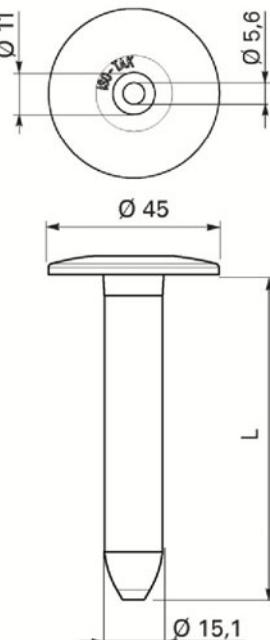


Electronic copy of the ETA by DIBt: ETA-08/0262


SFS intec flat roof fasteners

Combination 67
SFS intec TI-S-T25-6,1xL
SFS intec R45xL


Annex 67

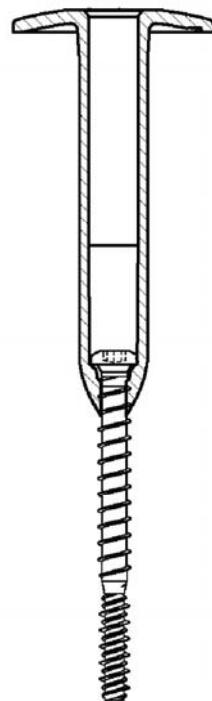

TIA-T25-6,3xL

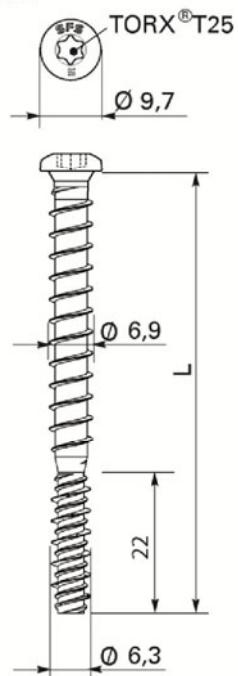


R45xL

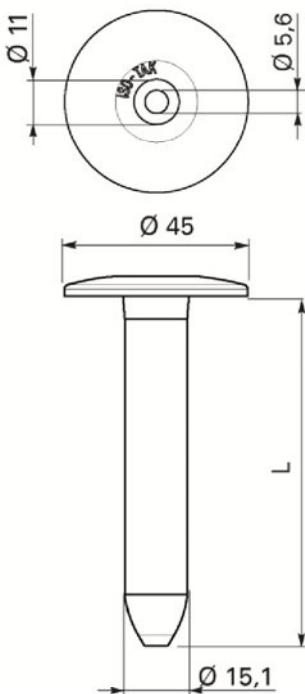


SFS intec flat roof fasteners

Combination 68
SFS intec TIA-T25-6,3xL
SFS intec R45xL


Annex 68

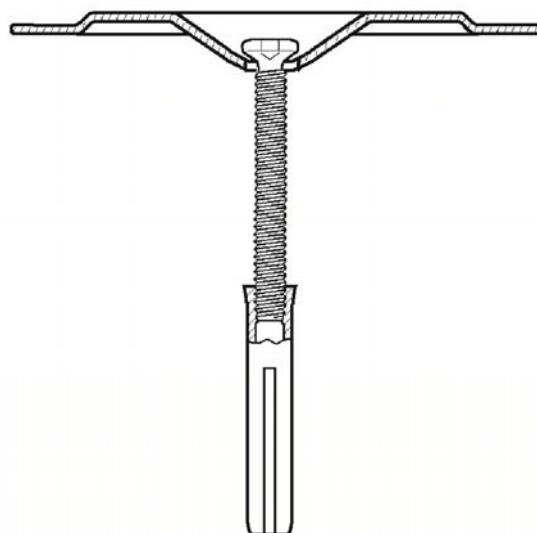

IE-6,3xL

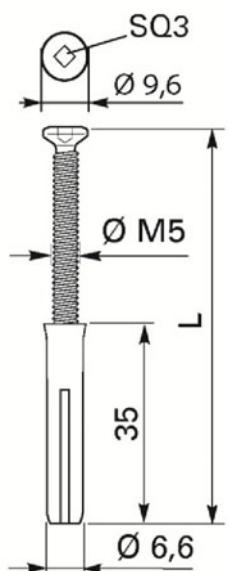


IRD-82x40

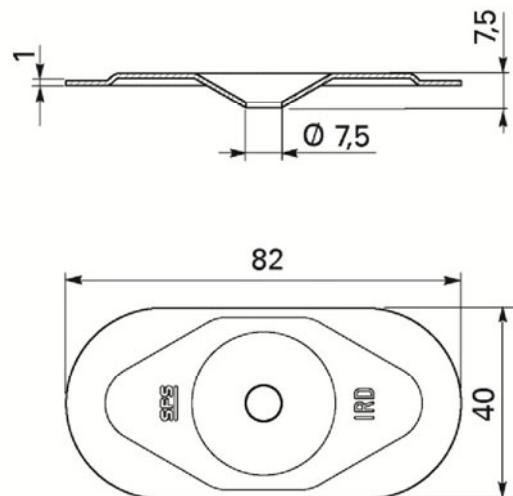


SFS intec flat roof fasteners

Combination 69
SFS intec IE-6,3xL
SFS intec IRD-82x40


Annex 69

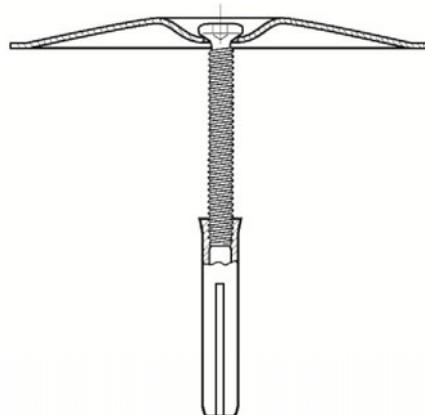


IE-6,3xL

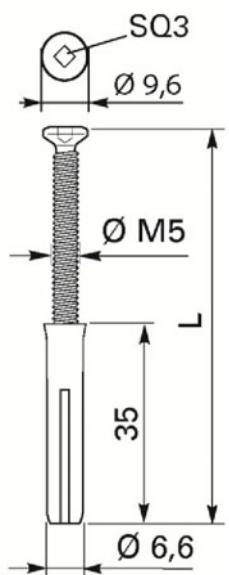


IE-C-82x40

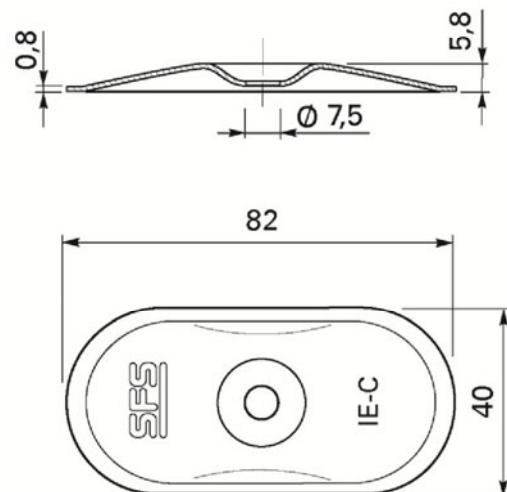


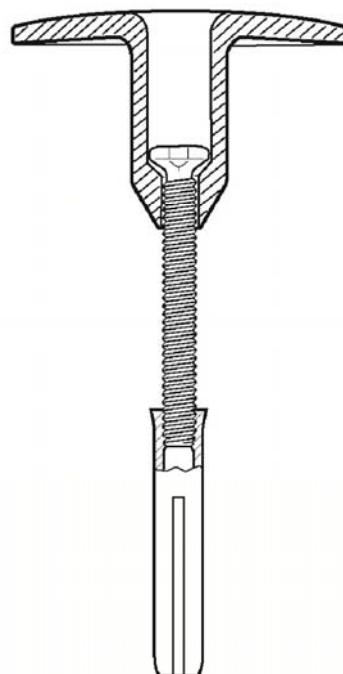


IE-6,3xL

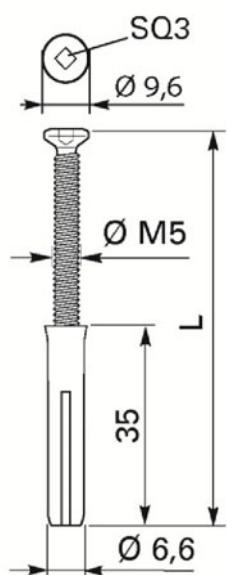


TC-50-30

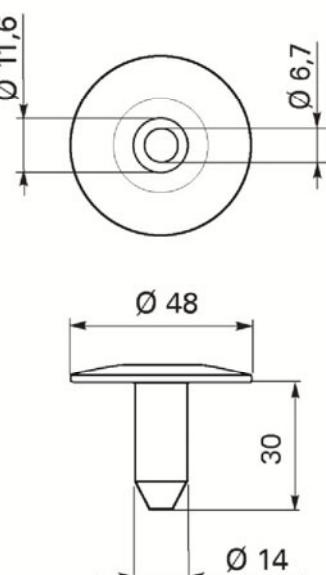


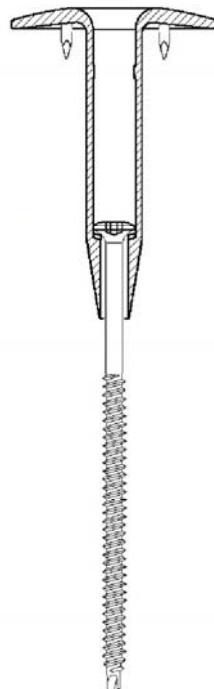

BS-4,8xL

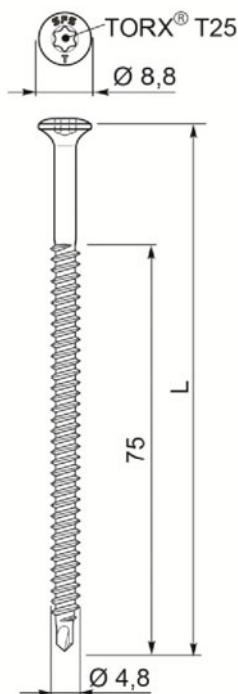

Sarnafast Tube SFT-50xL

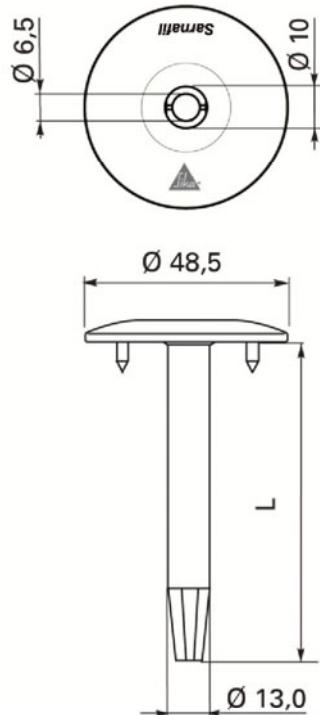


SFS intec flat roof fasteners

Combination 72
SFS intec BS-4,8xL
Sarnafast Tube SFT-50xL


Annex 72



BS-4,8xL

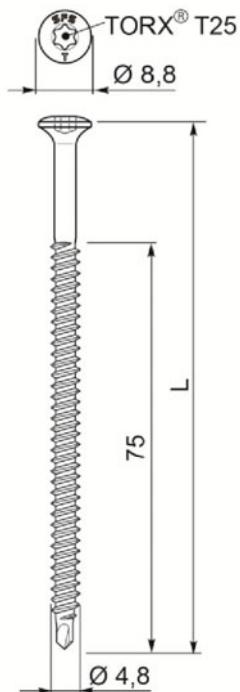


Sarnabar Tube SBT-20xL

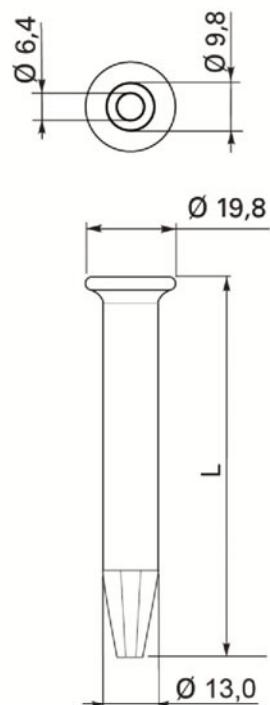


SFS intec flat roof fasteners

Combination 73
SFS intec BS-4,8xL
Sarnabar Tube SBT-20xL


Annex 73

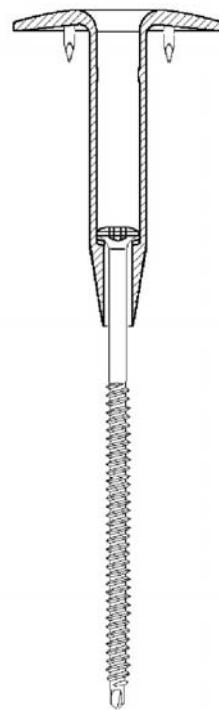

BS-S-4,8xL

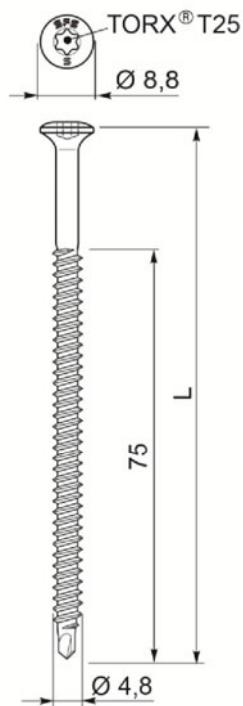



Sarnafast Tube SFT-50xL

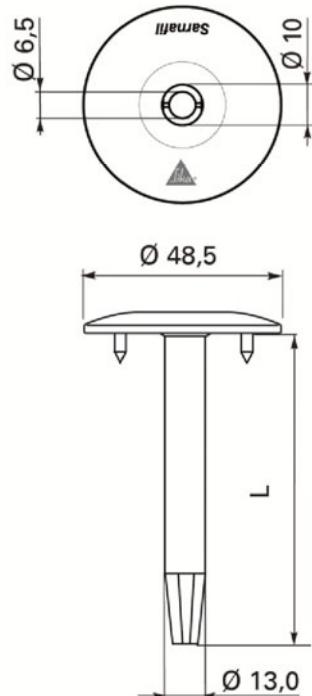

SFS intec flat roof fasteners

Combination 74
SFS intec BS-S-4,8xL
Sarnafast Tube SFT-50xL


Annex 74

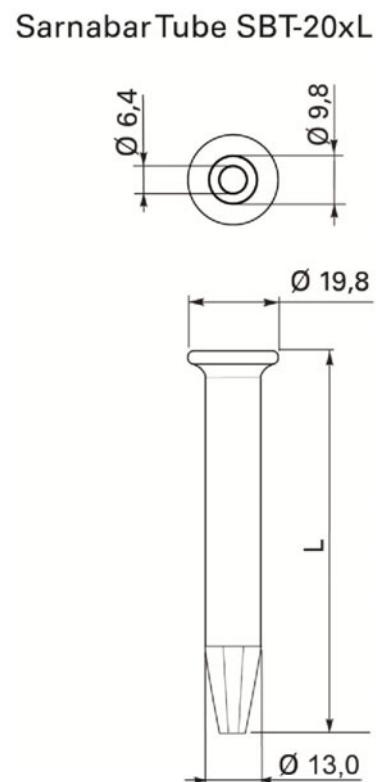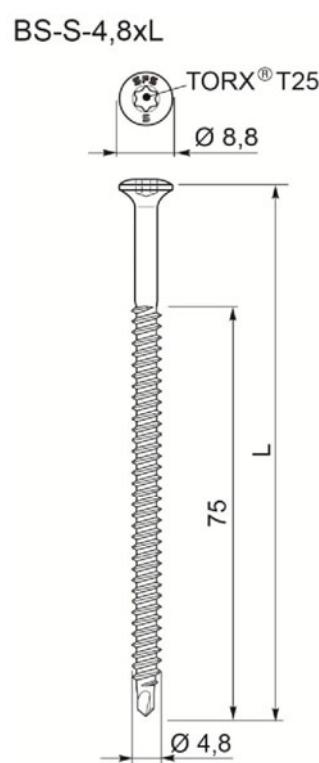


SFS intec flat roof fasteners

Combination 75
SFS intec BS-S-4,8xL
Sarnabar Tube SBT-20xL


Annex 75

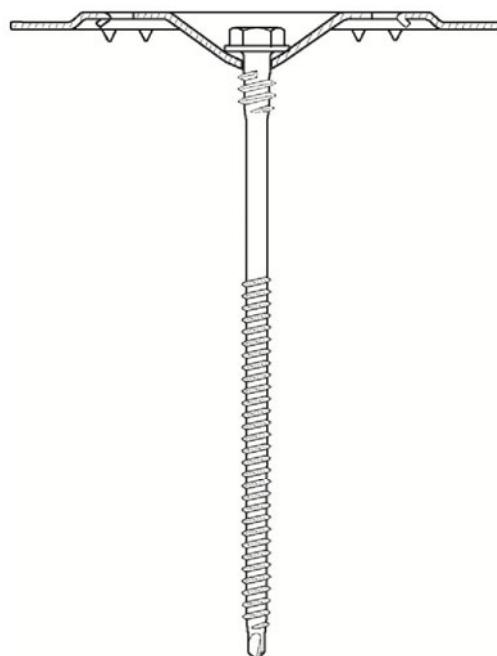

Sarnafast SF-4,8xL

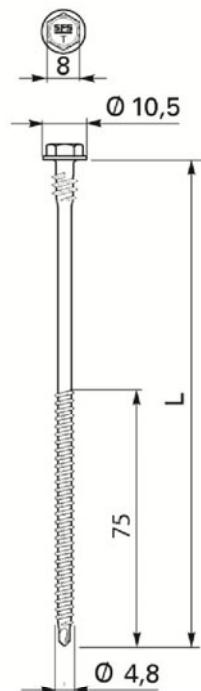


Sarnafast KT-82x40

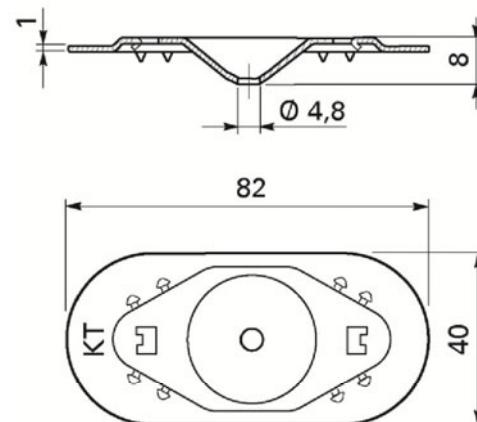


SFS intec flat roof fasteners

Combination 76
Sarnafast SF-4,8xL
Sarnafast KT-82x40


Annex 76

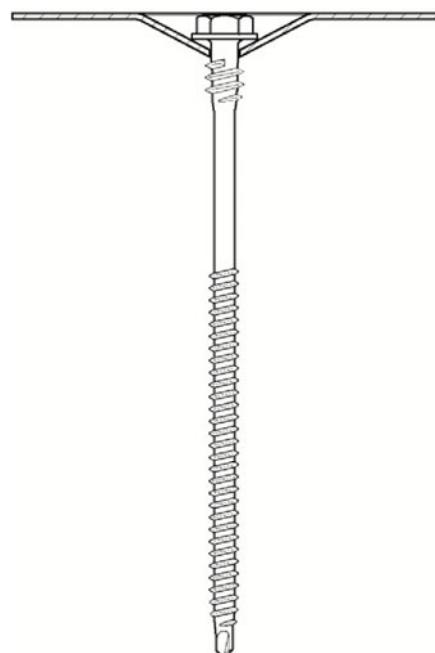

Sarnafast SF-4,8xL

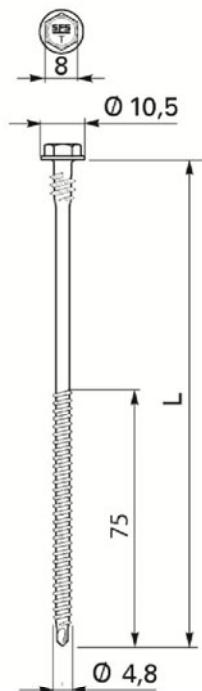


Sarnafast DT-70x70

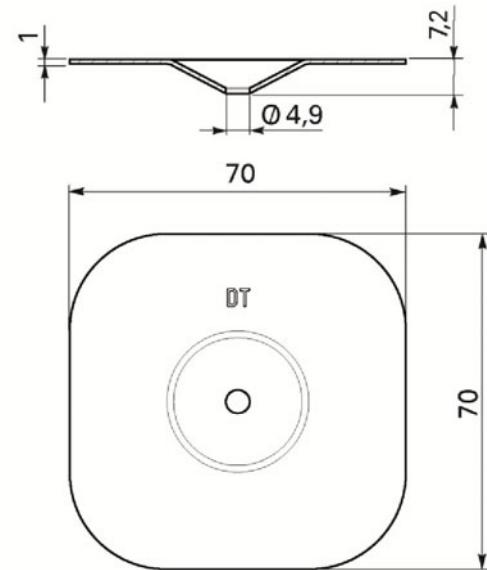


SFS intec flat roof fasteners

Combination 77
Sarnafast SF-4,8xL
Sarnafast DT-70x70


Annex 77

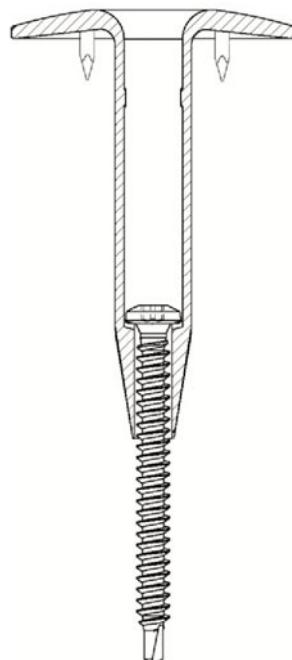

Sarnafast SBF-6,0xL

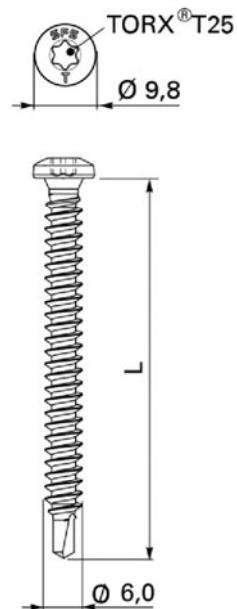

SarnafastTube SFT-50xL

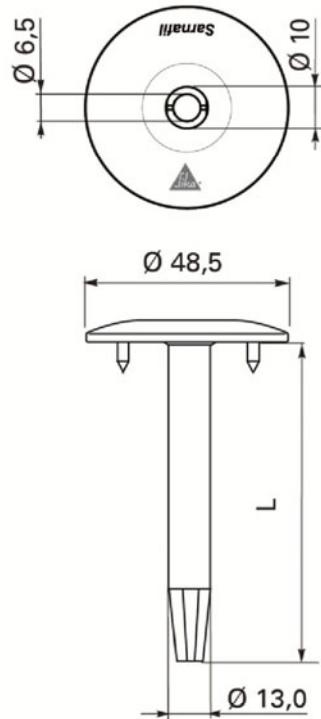


SFS intec flat roof fasteners

Combination 78
Sarnafast SBF-6,0xL
Sarnafast Tube SFT-50xL


Annex 78



Sarnafast SBF-6,0xL

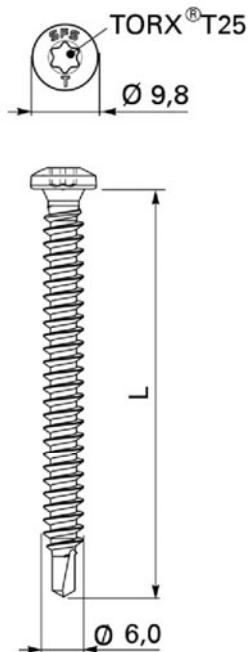


Sarnabar Tube SBT-20xL

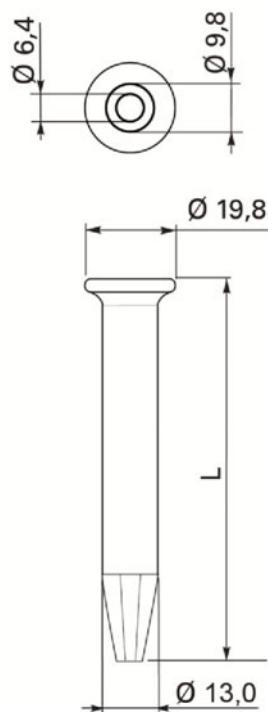


SFS intec flat roof fasteners

Combination 79
Sarnafast SBF-6,0xL
Sarnabar Tube SBT-20xL


Annex 79

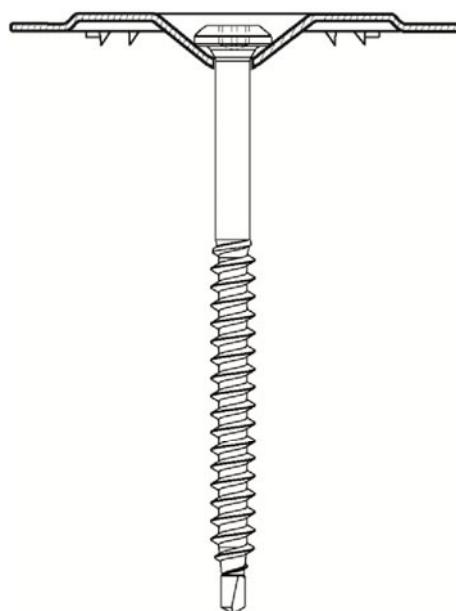

Sarnafast SB-6,3xL

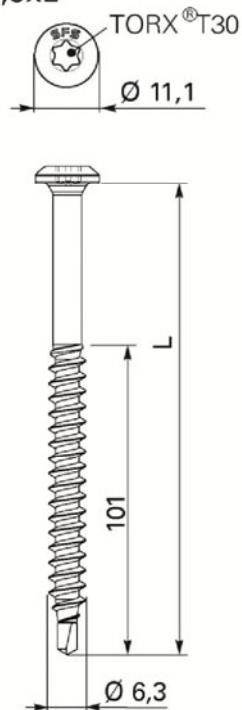


Sarnafast KTL-82x40

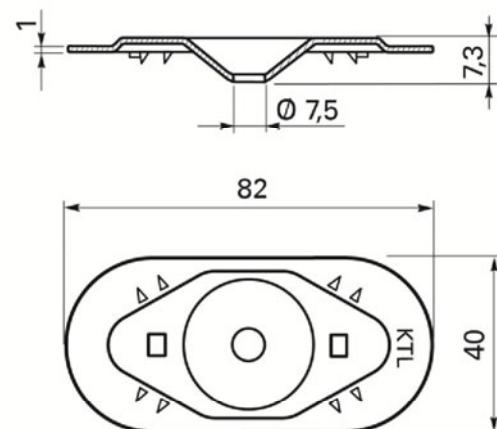


SFS intec flat roof fasteners

Combination 80
Sarnafast SB-6,3xL
Sarnafast KTL-82x40


Annex 80

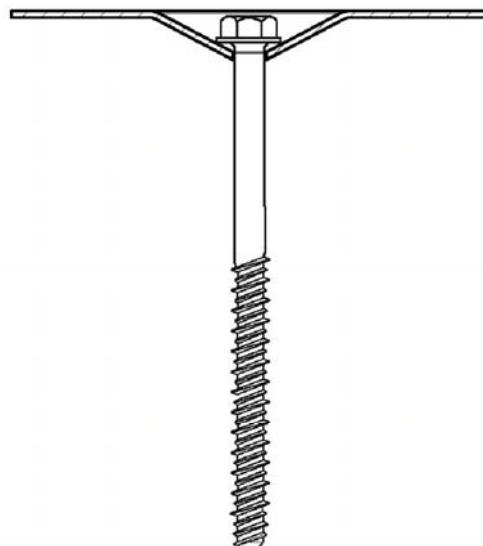

TI-6,3xL

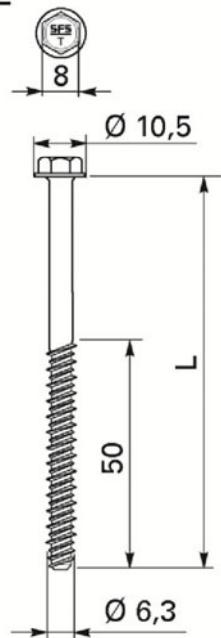


Sarnafast DTL-70x70

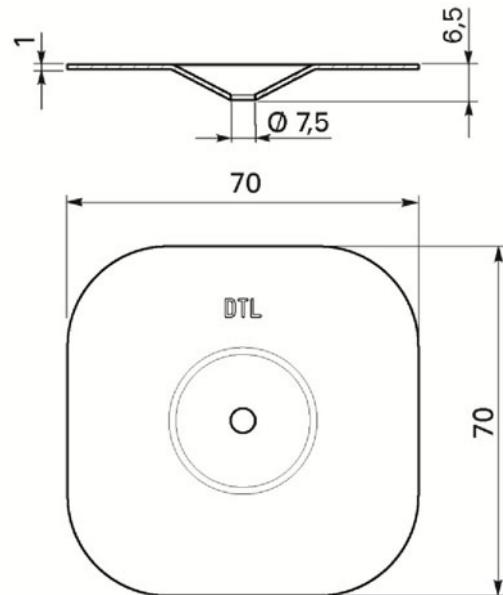



SFS intec flat roof fasteners

Combination 81
SFS intec TI-6,3xL
Sarnafast DTL-70x70



Annex 81

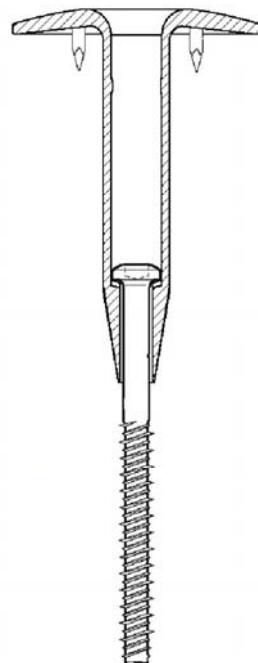

TI-T25-6,3xL

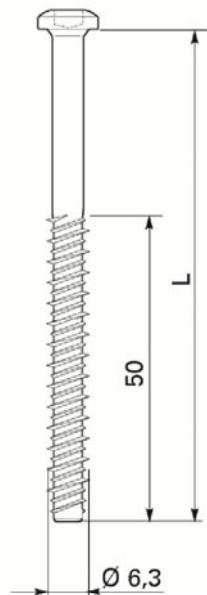


Sarnafast Tube SFT-50xL

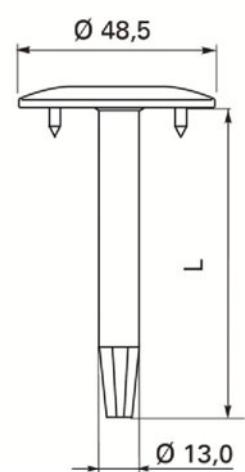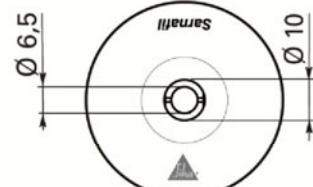



SFS intec flat roof fasteners

Combination 82
SFS intec TI-T25-6,3xL
Sarnafast Tube SFT-50xL


Annex 82

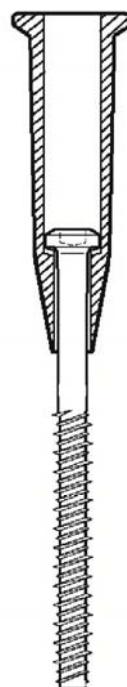

TI-T25-6,3xL

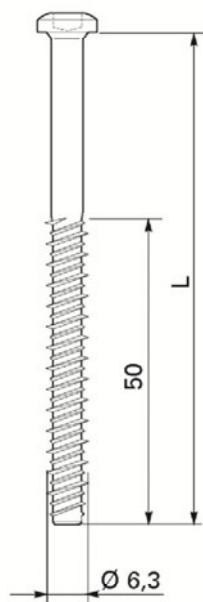


Sarnabar Tube SBT-20xL

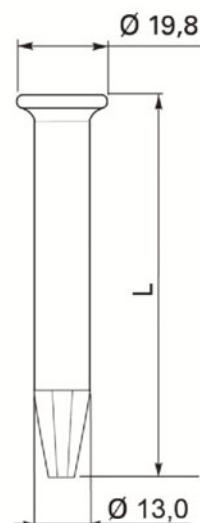


SFS intec flat roof fasteners

Combination 83
SFS intec TI-T25-6,3xL
Sarnabar Tube SBT-20xL


Annex 83

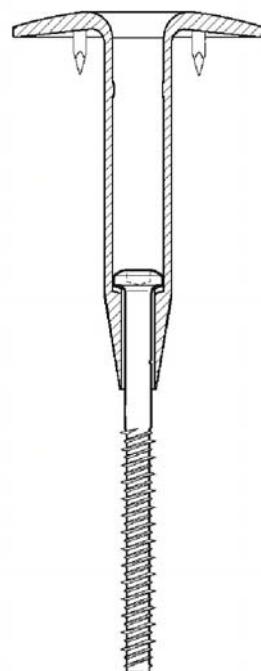

TI-S-T25-6,1xL

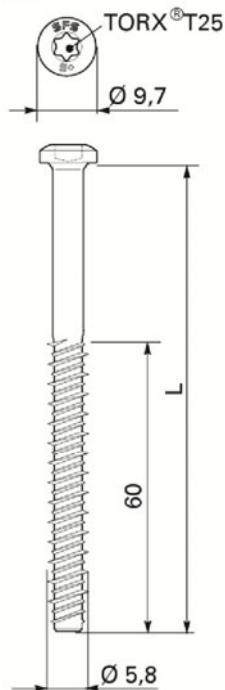


Sarnafast Tube SFT-50xL

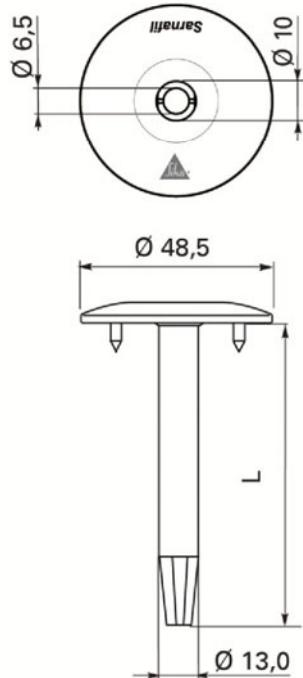



SFS intec flat roof fasteners

Combination 84
SFS intec TI-S-T25-6,1xL
Sarnafast Tube SFT-50xL



Annex 84

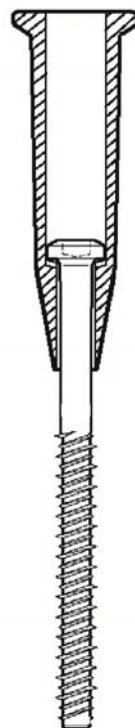

TI-S-T25-6,1xL

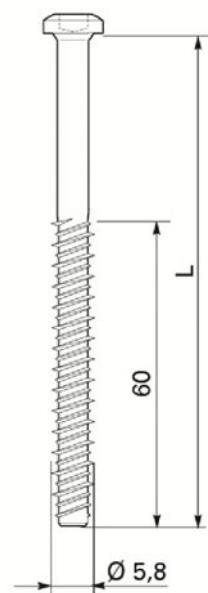




Sarnabar Tube SBT-20xL

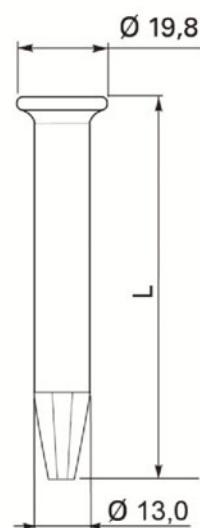

SFS intec flat roof fasteners

Combination 85
SFS intec TI-S-T25-6,1xL
Sarnabar Tube SBT-20xL


Annex 85

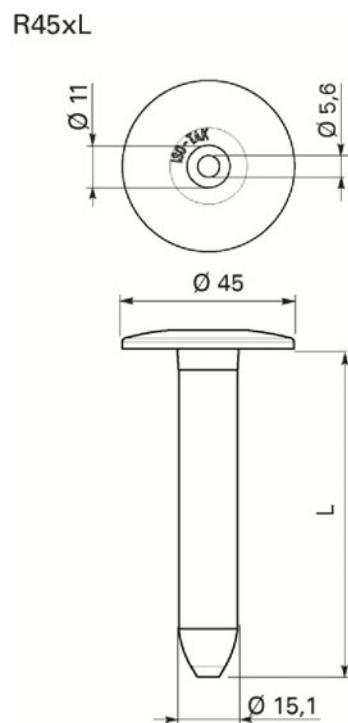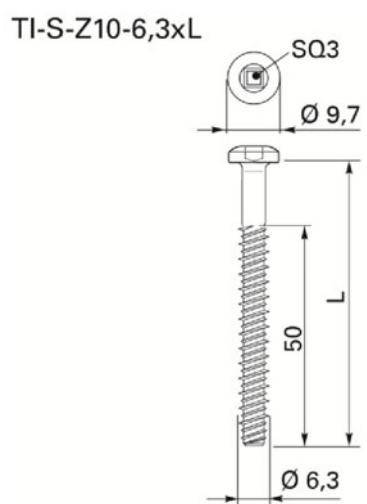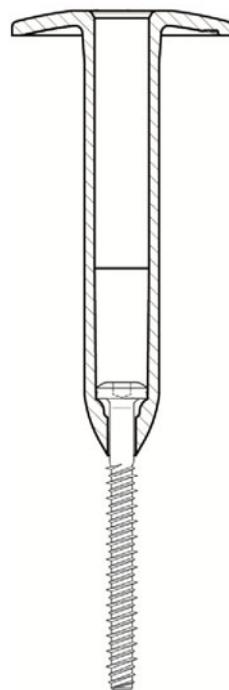


SFS intec flat roof fasteners

Combination 86
SFS intec TI-S-Z10-6,3xL
SFS intec R45xL


Annex 86

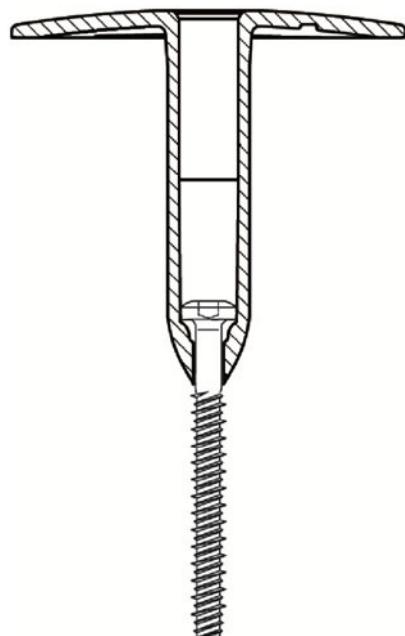

TI-S-Z10-6,3xL

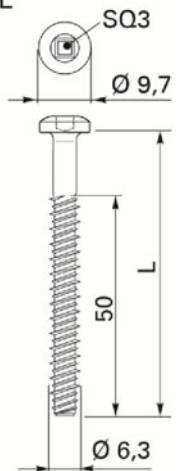



R75xL

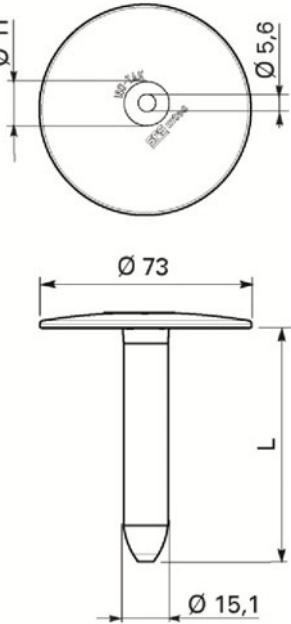


SFS intec flat roof fasteners

Combination 87
SFS intec TI-S-Z10-6,3xL
SFS intec R75xL

Annex 87

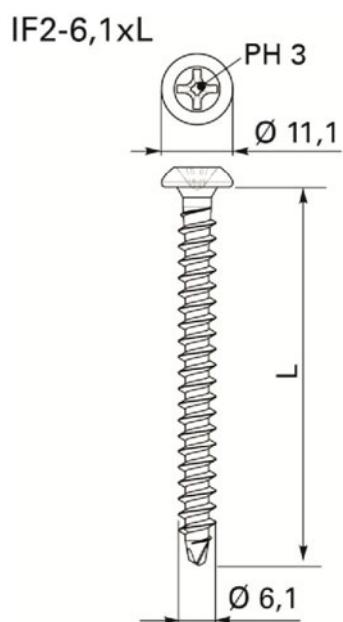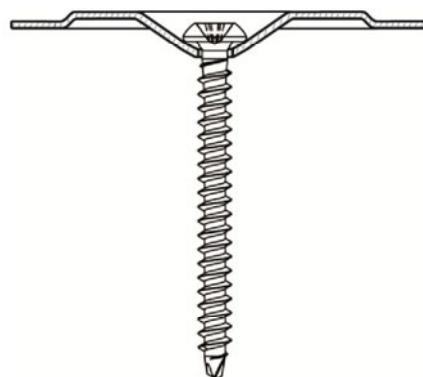



IRD-82x40

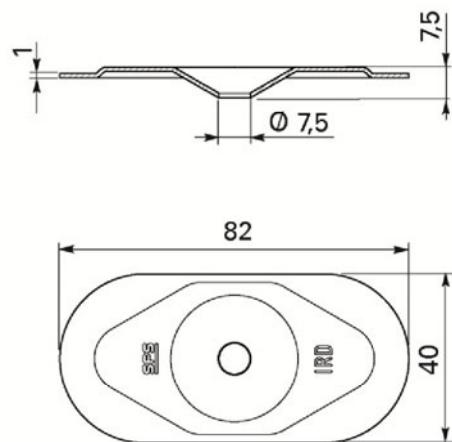


SFS intec flat roof fasteners

Combination 88
SFS intec IF2-6,1xL
SFS intec IRD-82x40

Annex 88

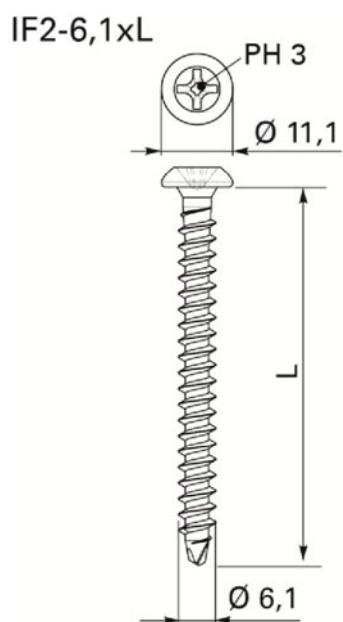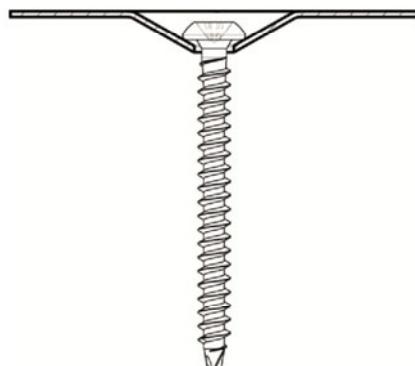

ID-70x70

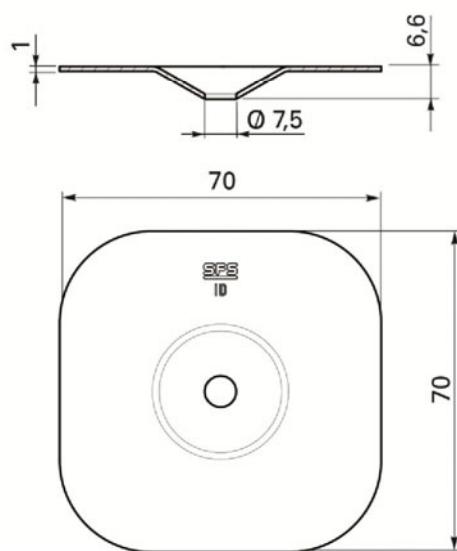


SFS intec flat roof fasteners


Combination 89
SFS intec IF2-6,1xL
SFS intec ID-70x70

Annex 89

TS-T25-6,0xL

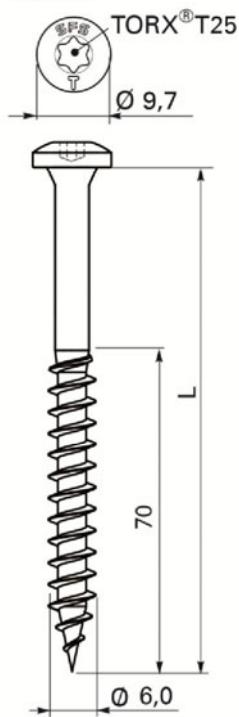


R45xL

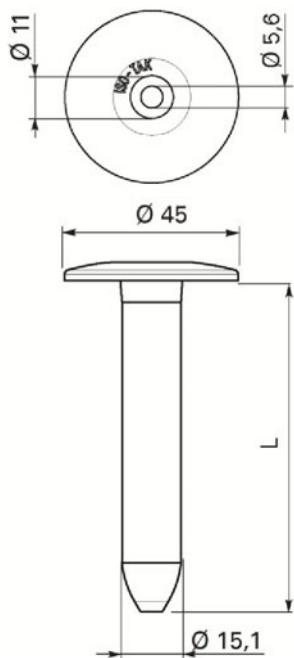


SFS intec flat roof fasteners

Combination 90
SFS intec TS-T25-6,0xL
SFS intec R45xL


Annex 90

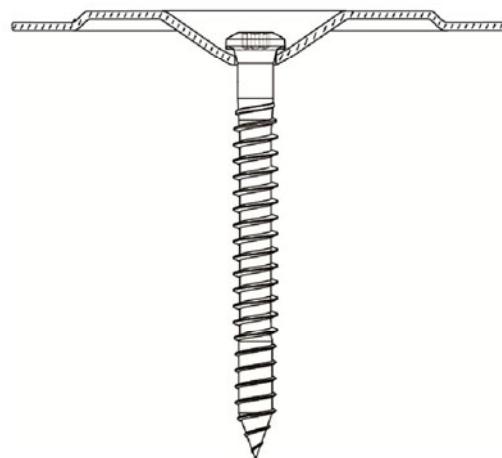


FB-S-T25-7,5xL

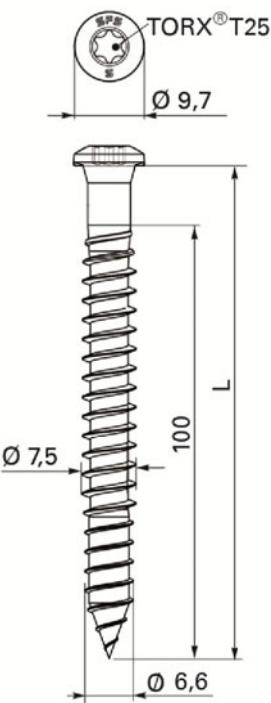


IRD-82x40

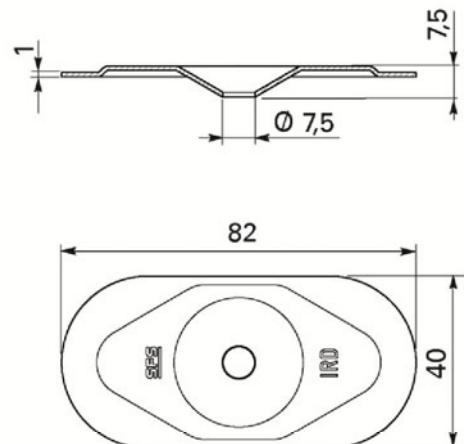


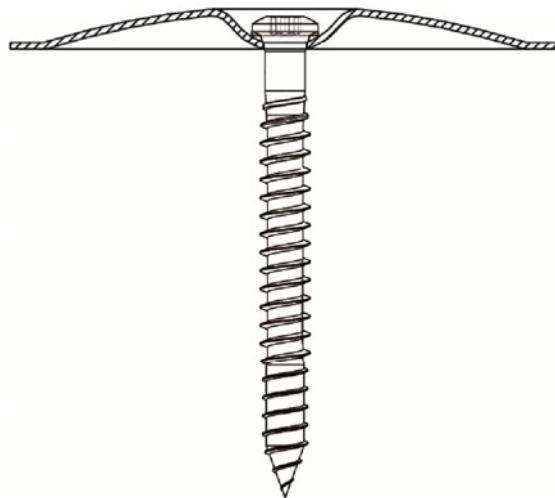


FB-S-T25-7,5xL

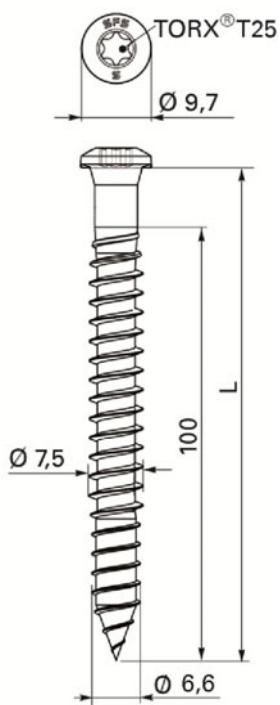


IF/IG-C-82x40

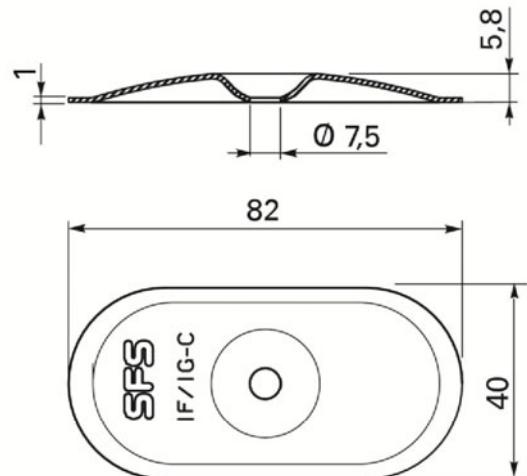


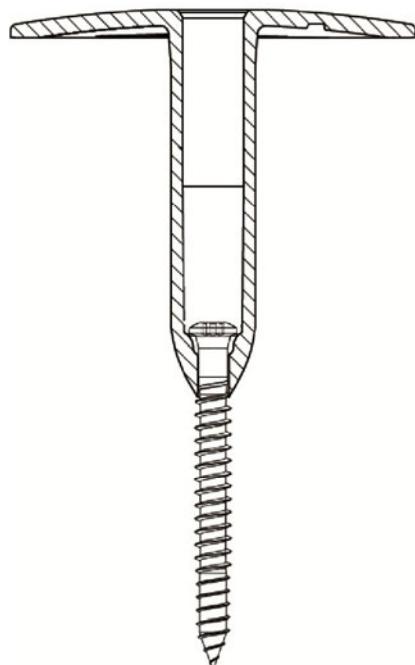

FB-S-T25-7,5xL

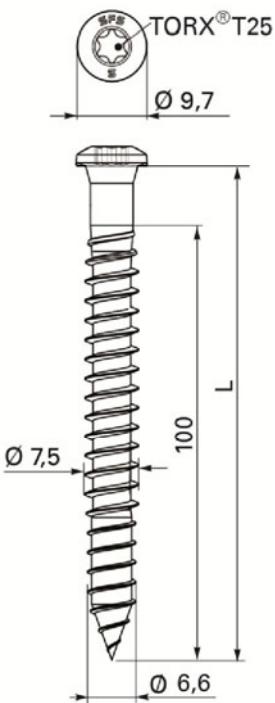


R75xL

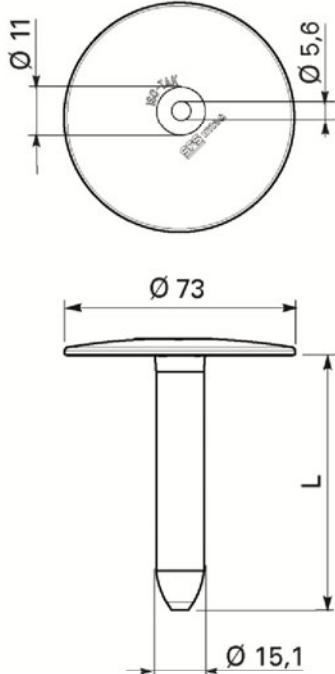


SFS intec flat roof fasteners

Combination 93
SFS intec FB-S-T25-7,5xL
SFS intec R75xL


Annex 93

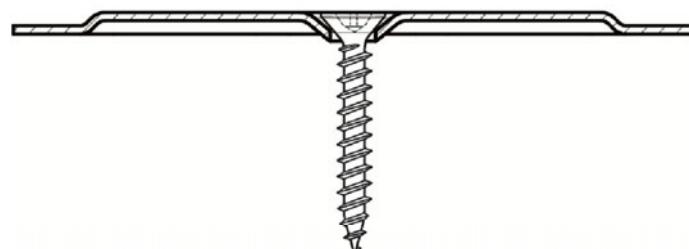


IW-S-5,0xL

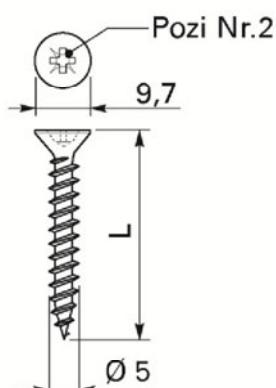


IW-82x40

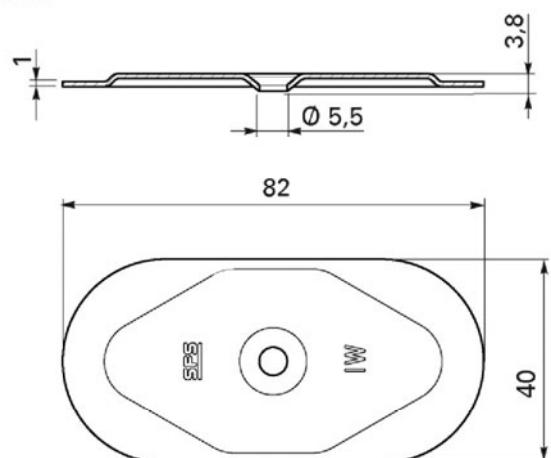


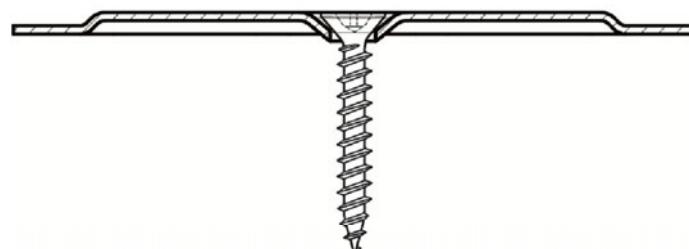


IW-T-5,0xL

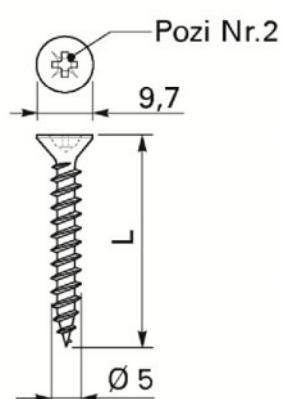


IW-82x40

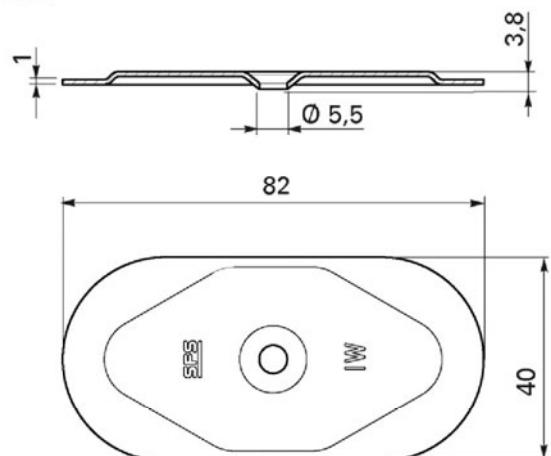


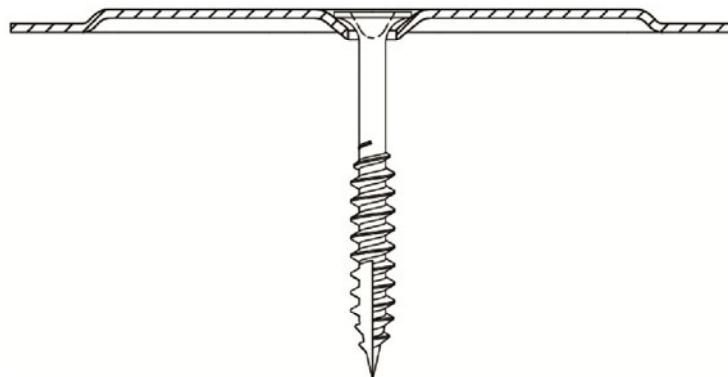

IWF-5,2xL

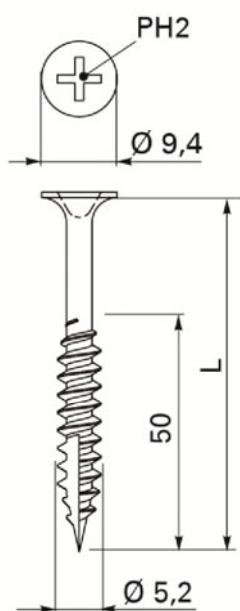


IW-82x40

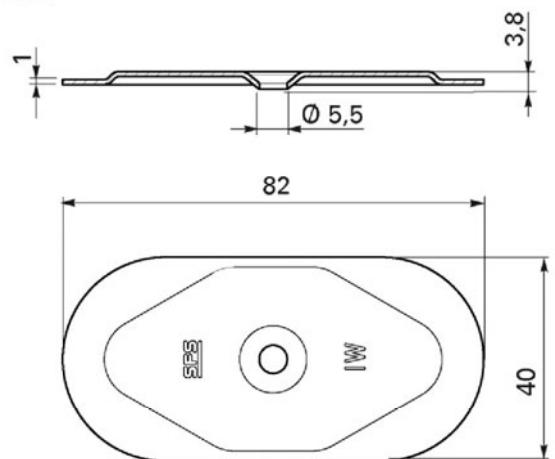


SFS intec flat roof fasteners

Combination 96
SFS intec IWF-5,2xL
SFS intec IW-82x40


Annex 96

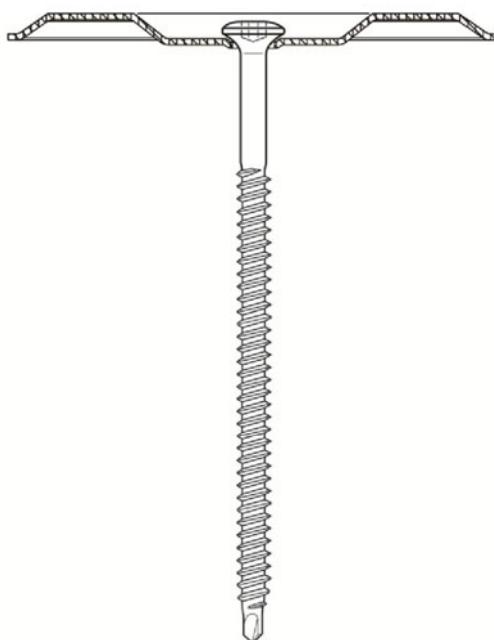

BS-4,8xL

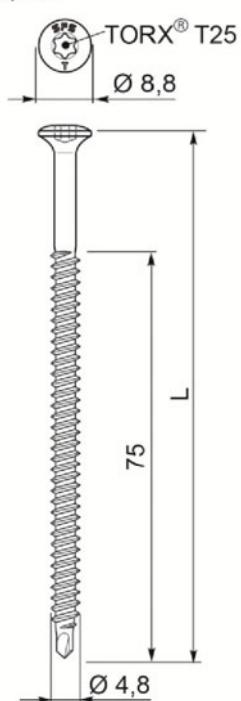


FI-P-6,8

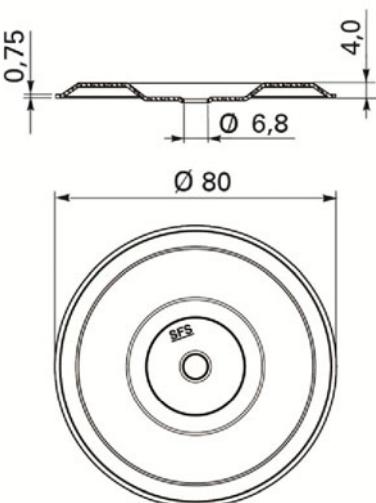


SFS intec flat roof fasteners

Combination 97
SFS intec BS-4,8xL
SFS intec FI-P-6,8


Annex 97

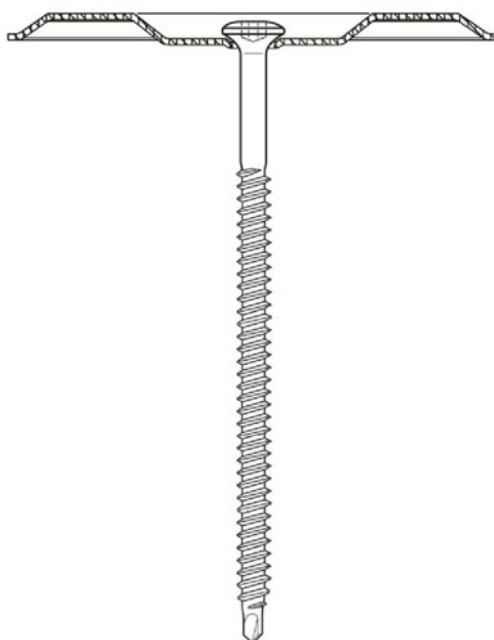

BS-S-4,8xL

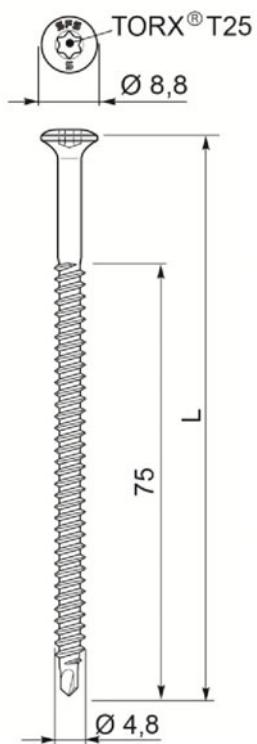


FI-P-6,8

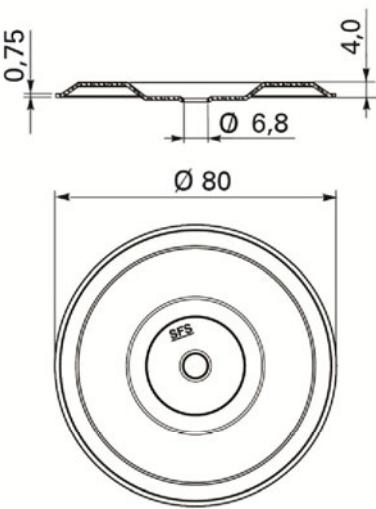


SFS intec flat roof fasteners

Combination 98
SFS intec BS-S-4,8xL
SFS intec FI-P-6,8



Annex 98

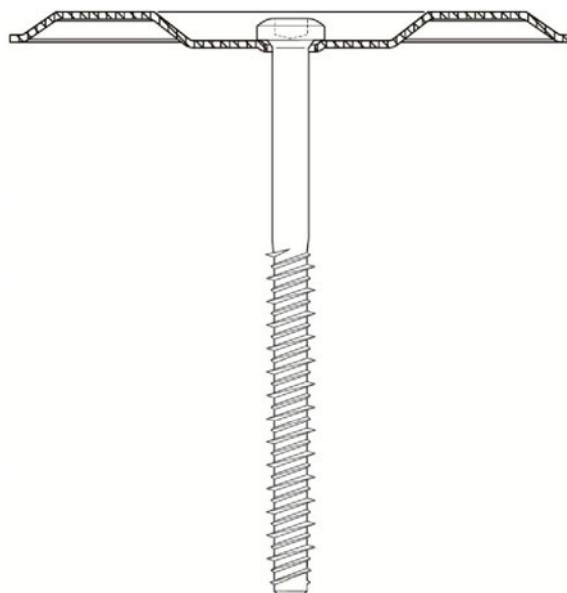


TI-T25-6,3xL

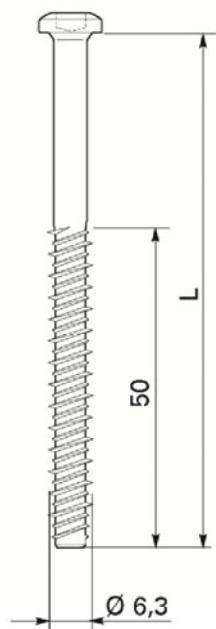


FI-P-6,8

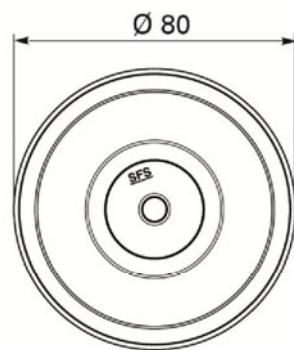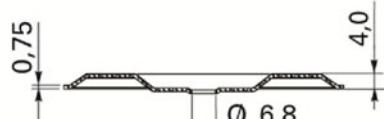


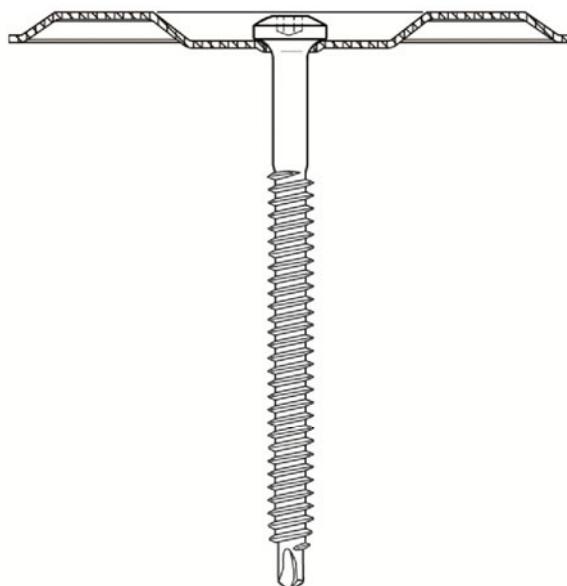


BS-6,1xL

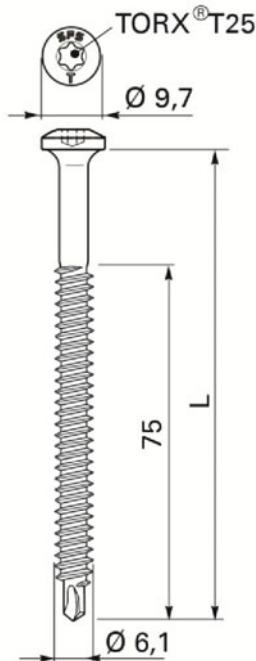


FI-P-6,8

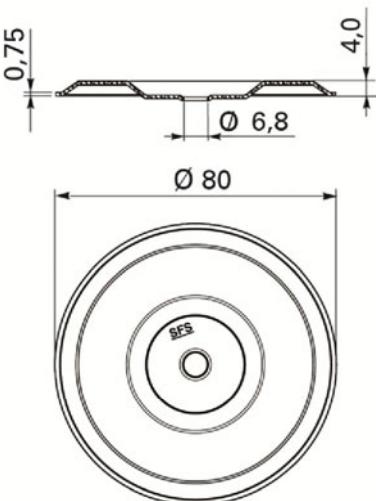


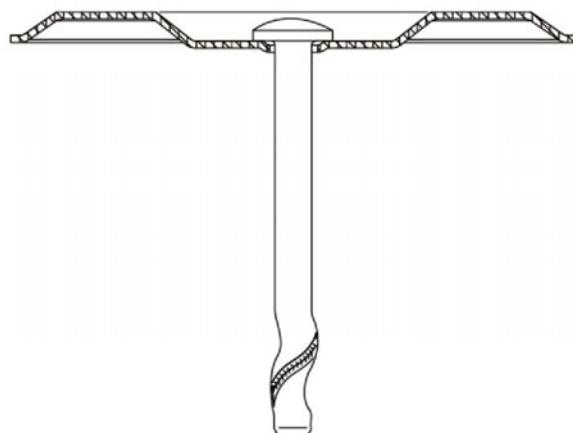

DT-4,8xL

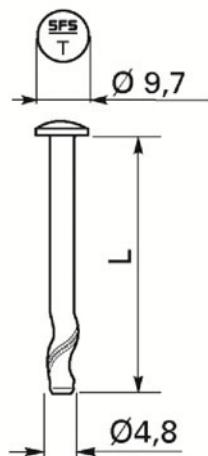


FI-P-6,8

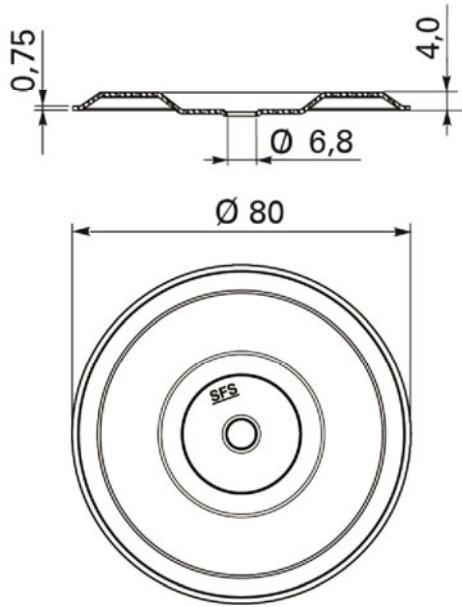


SFS intec flat roof fasteners

Combination 101
SFS intec DT-4,8xL
SFS intec FI-P-6,8


Annex 101

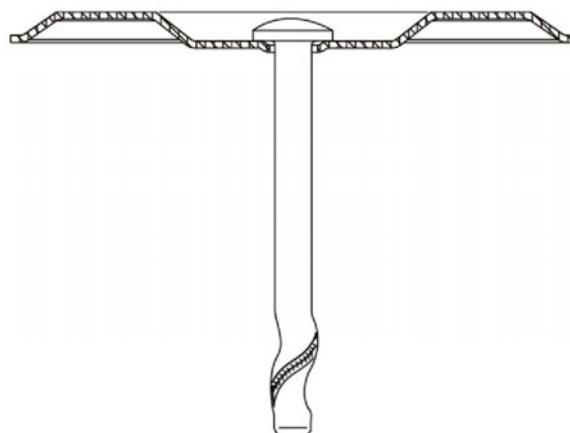


DT-S-4,8xL

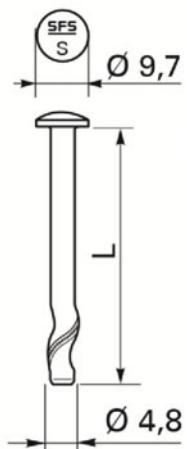


FI-P-6,8

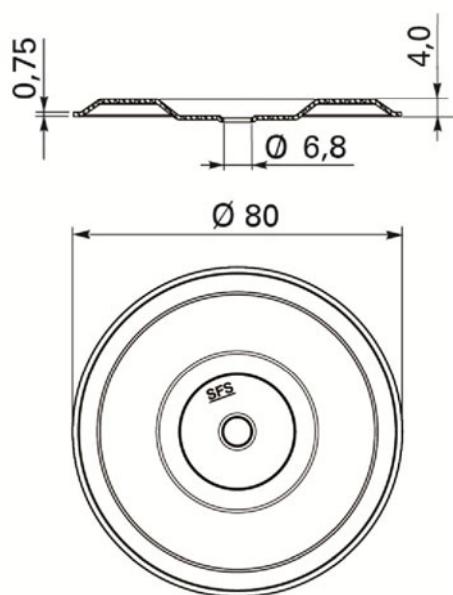


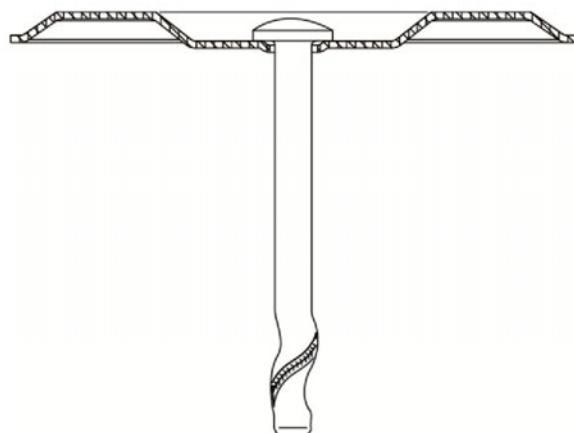

DT-6,3xL

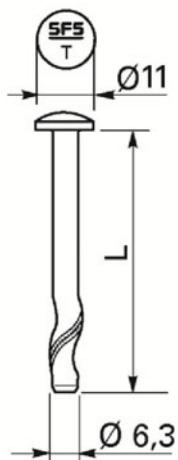


FI-P-6,8

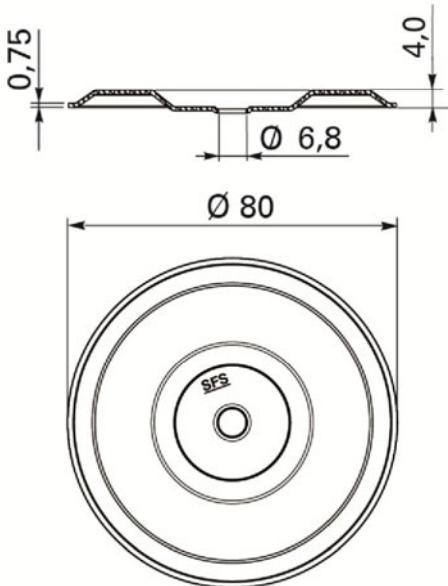


SFS intec flat roof fasteners

Combination 103
SFS intec DT-6,3xL
SFS intec FI-P-6,8


Annex 103

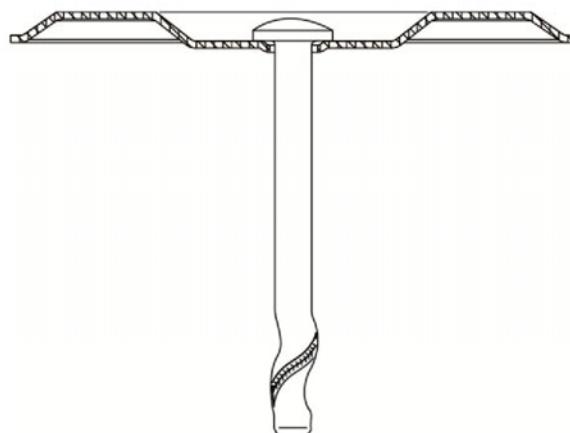

DT-S-6,3xL

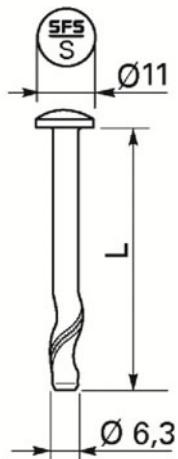


FI-P-6,8

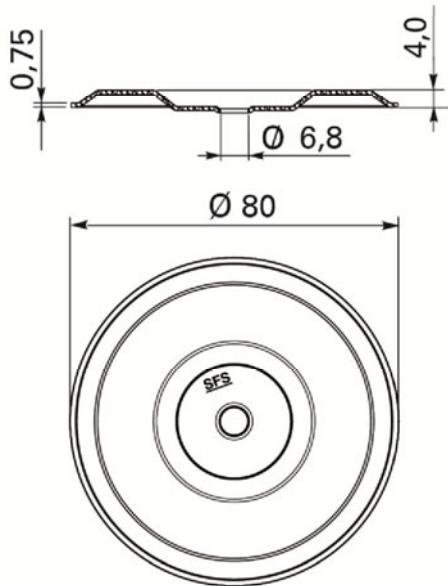


SFS intec flat roof fasteners

Combination 104
SFS intec DT-S-6,3xL
SFS intec FI-P-6,8


Annex 104

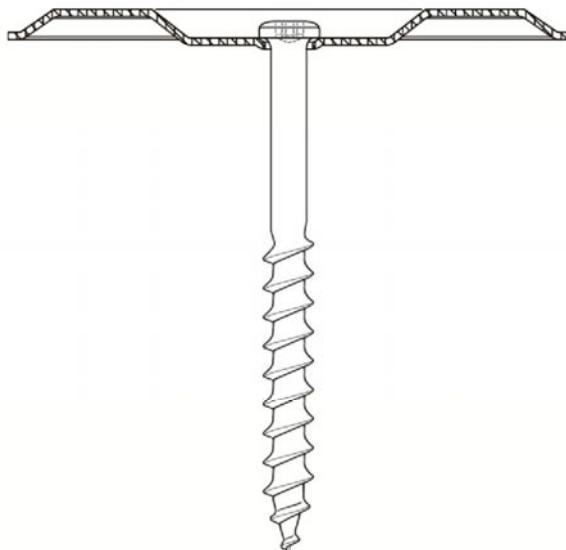

LBS-T25-8,0xL

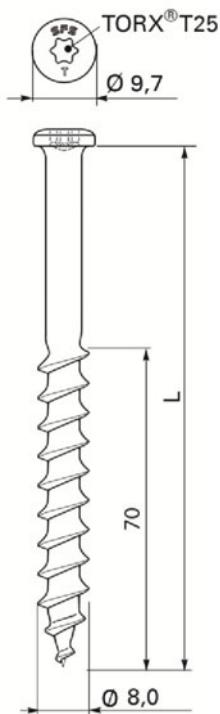


FI-P-6,8

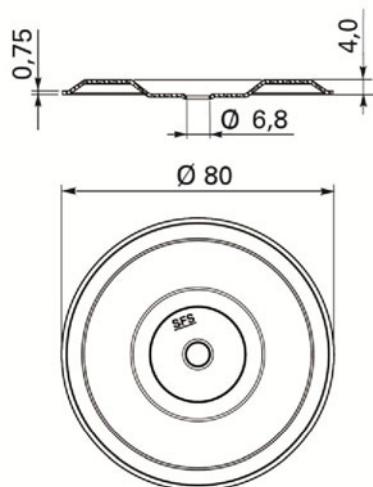


SFS intec flat roof fasteners

Combination 105
SFS intec LBS-T25-8,0xL
SFS intec FI-P-6,8


Annex 105

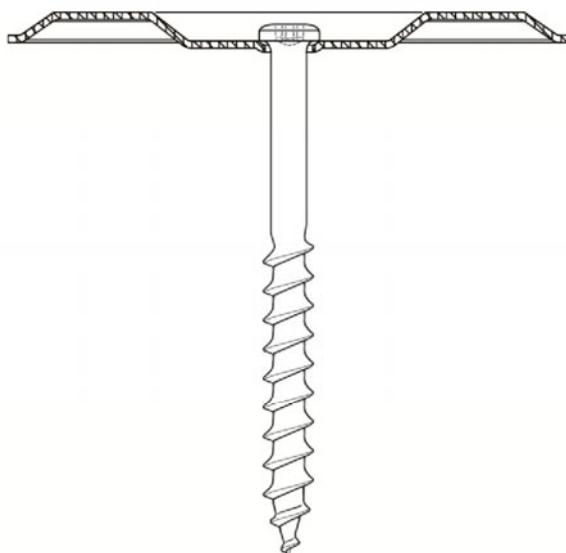


LBS-S-T25-8,0xL

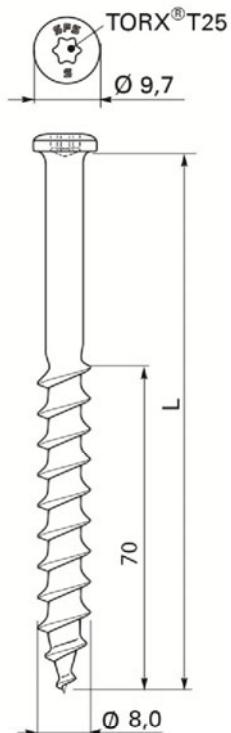


FI-P-6,8

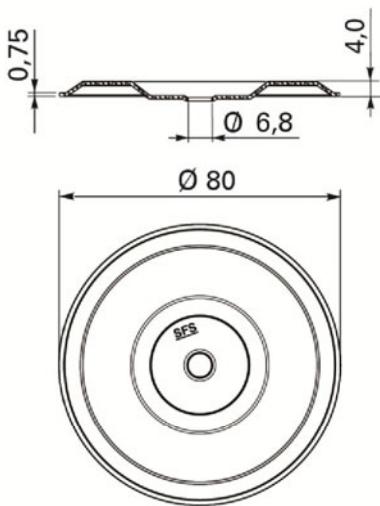


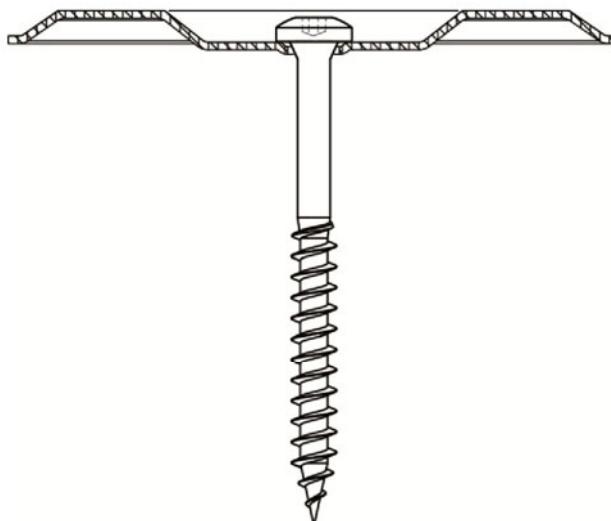

TS-T25-6,0xL

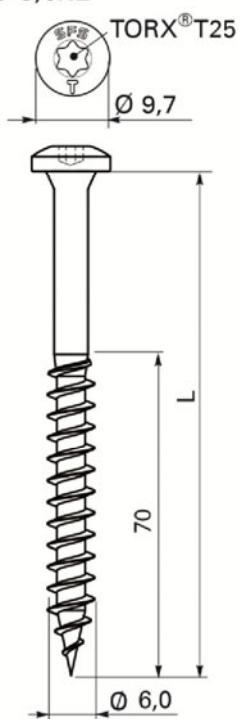


FI-P-6,8

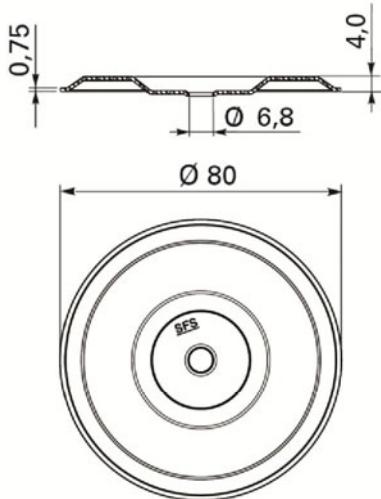


SFS intec flat roof fasteners

Combination 107
SFS intec TS-T25-6,0xL
SFS intec FI-P-6,8


Annex 107

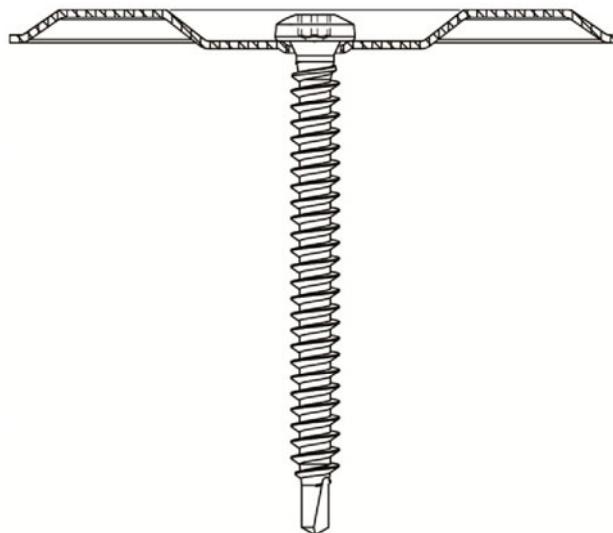

Sarnafast SBF-6,0xL

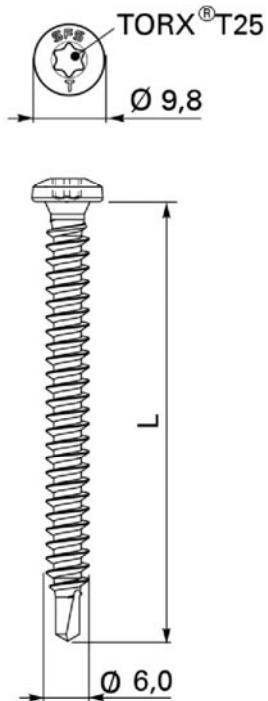


FI-P-6,8

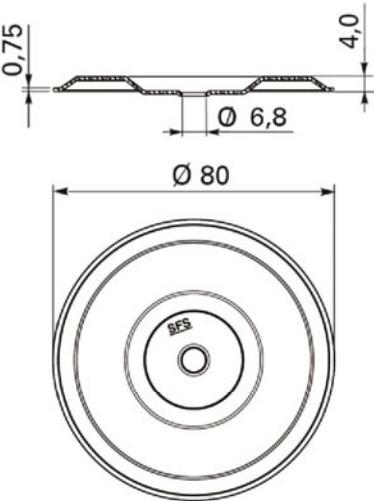


SFS intec flat roof fasteners

Combination 108
Sarnafast SBF-6,0xL
SFS intec FI-P-6,8


Annex 108

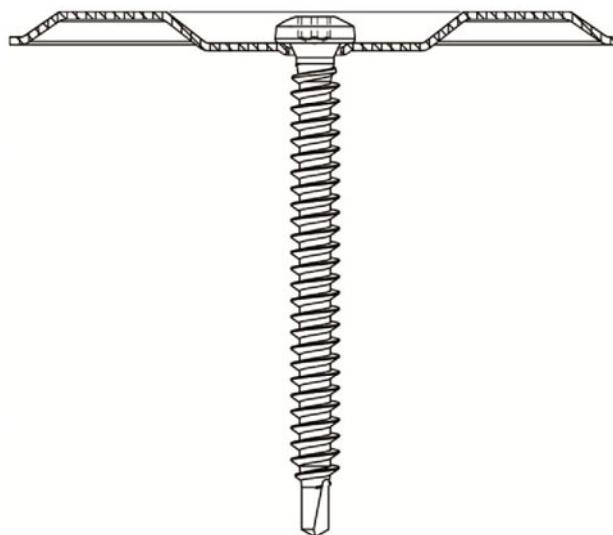

Sarnafast SBF-S-6,0xL

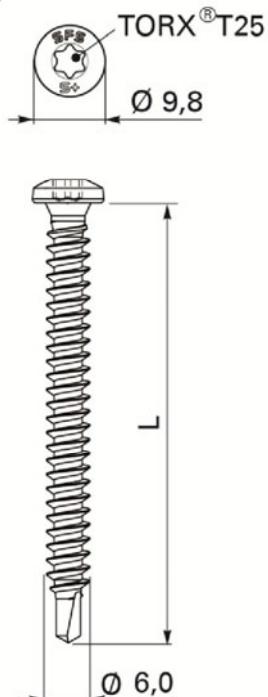


FI-P-6,8

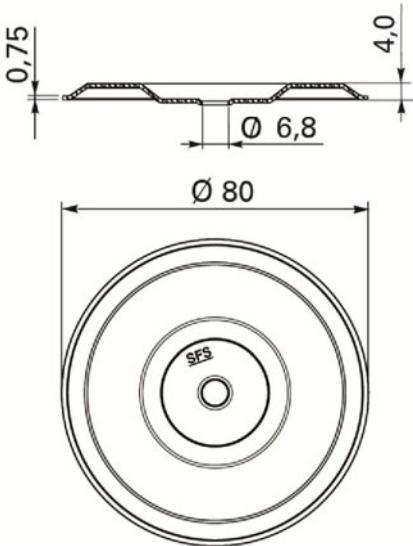


SFS intec flat roof fasteners

Combination 109
Sarnafast SBF-S-6,0xL
SFS intec FI-P-6,8


Annex 109

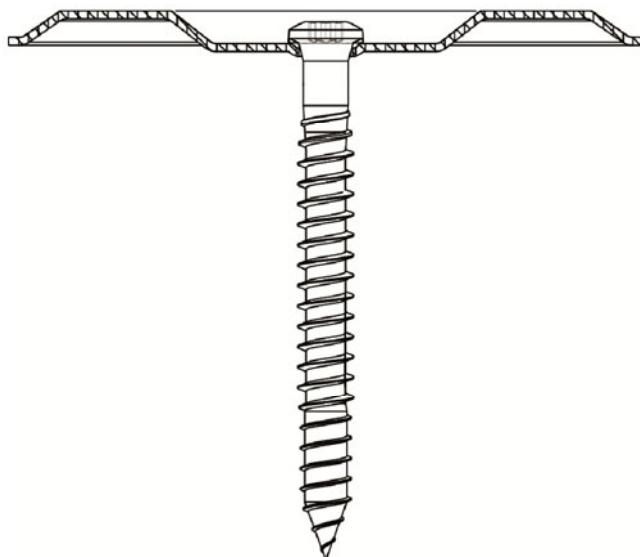

FB-S-T25-7,5xL

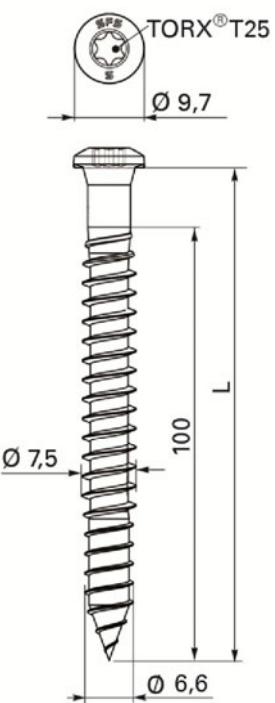


FI-P-6,8

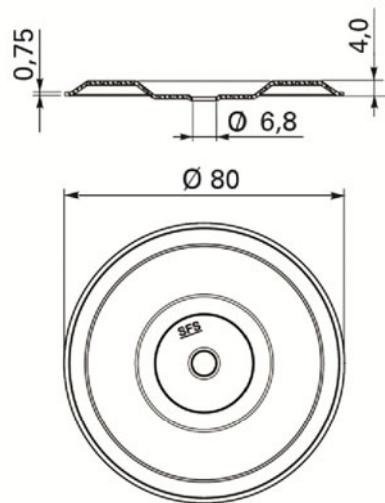

SFS intec flat roof fasteners

Combination 110
SFS intec FB-S-T25-7,5xL
SFS intec FI-P-6,8

Annex 110

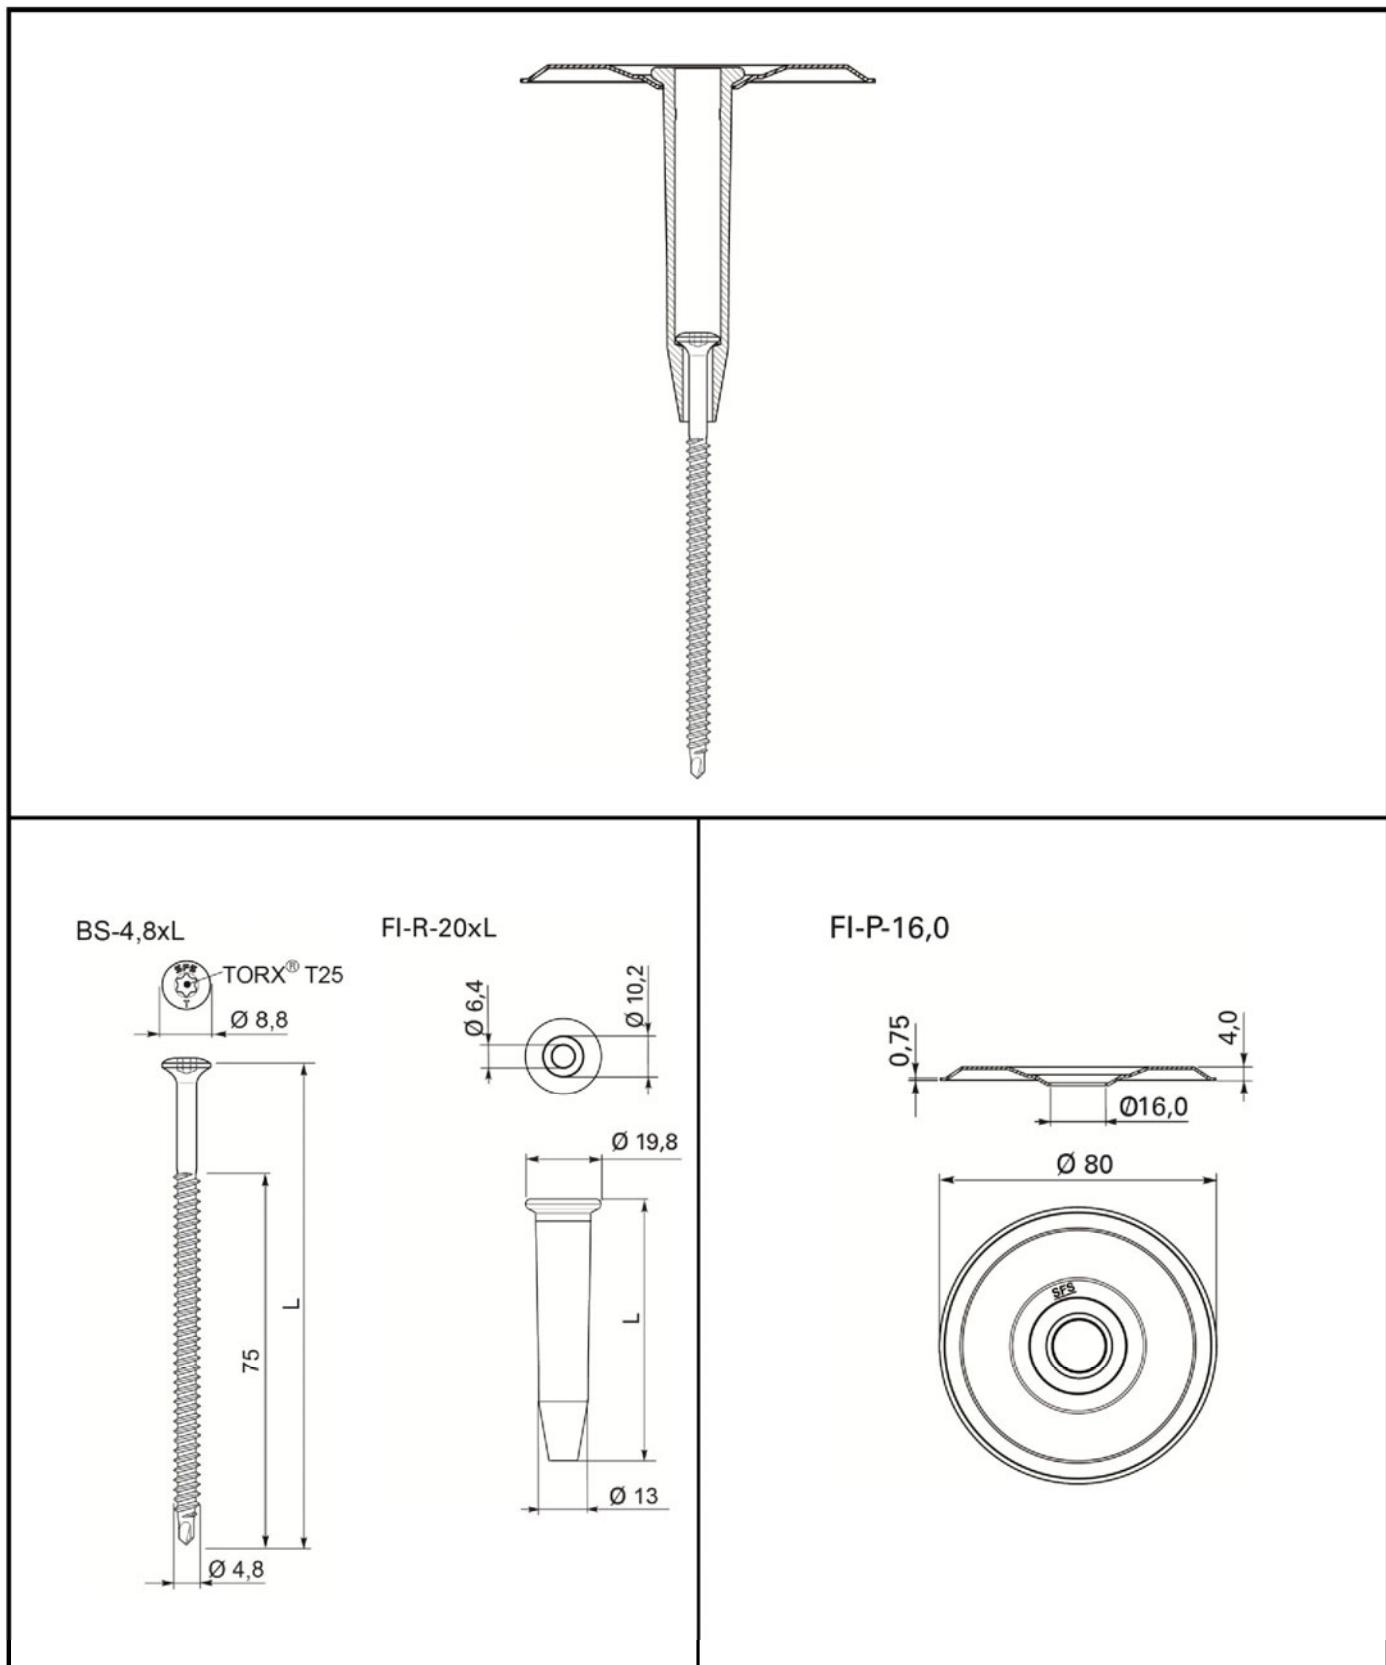






Electronic copy of the ETA by DIBt: ETA-08/0262

SFS intec flat roof fasteners

Combination 111
SFS intec BS-4,8xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0

Annex 111




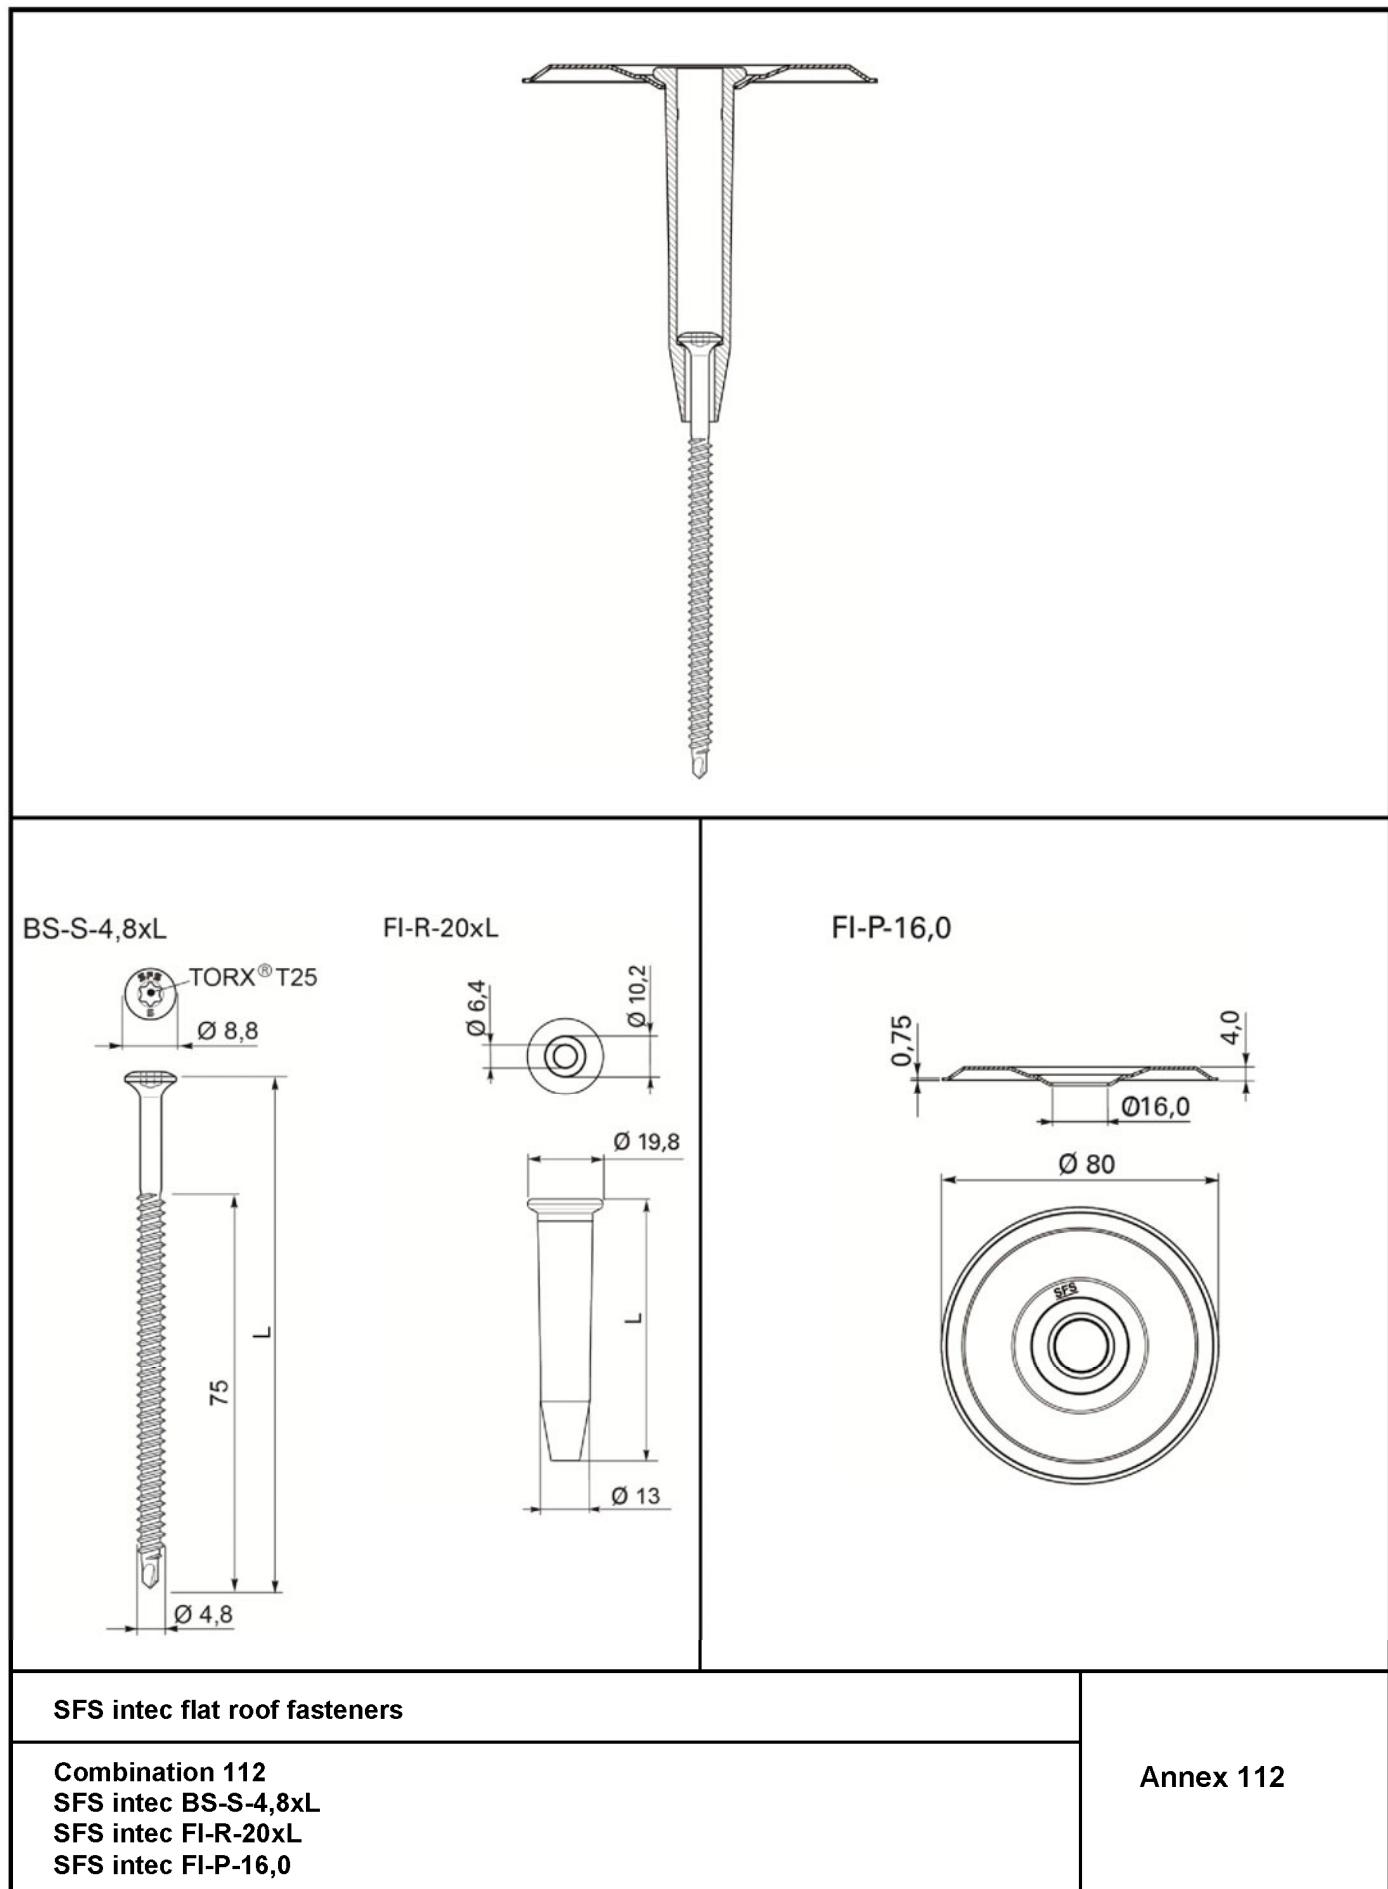


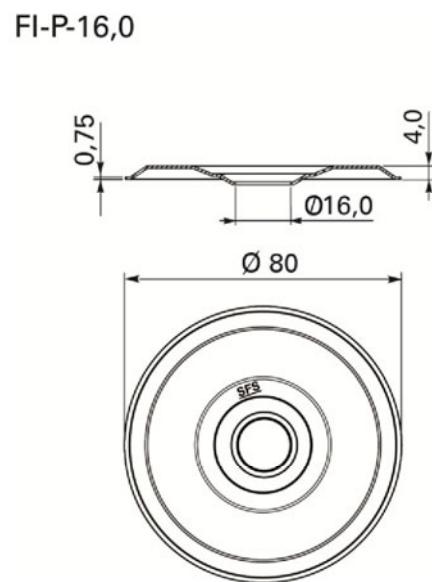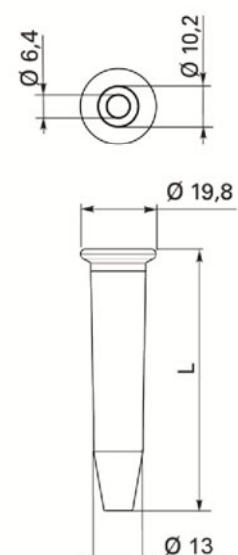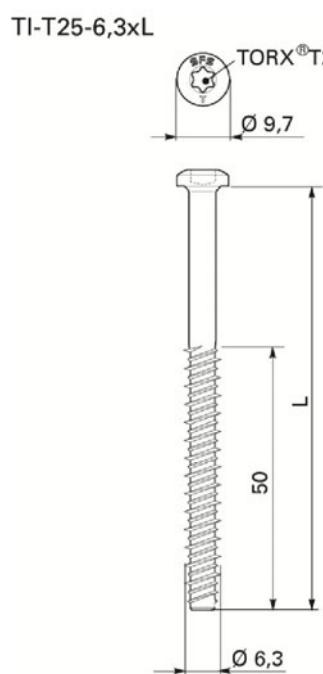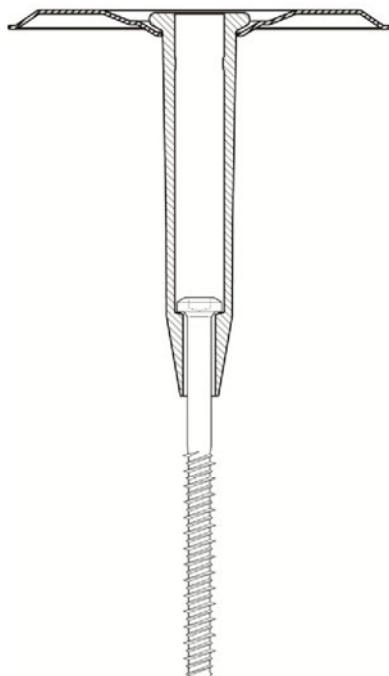


SFS intec flat roof fasteners

Combination 113
SFS intec TI-T25-6,3xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0

Annex 113

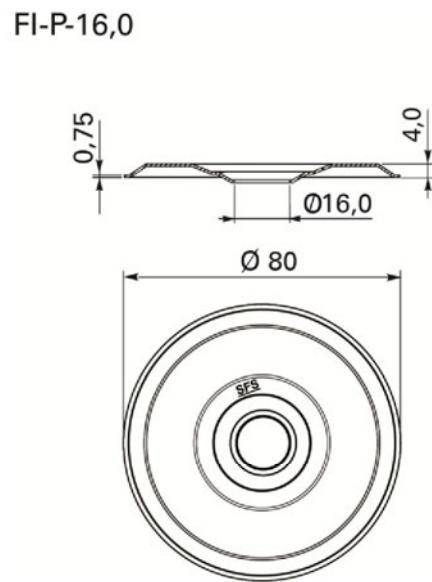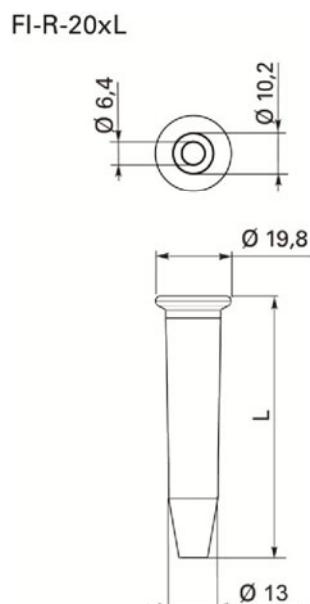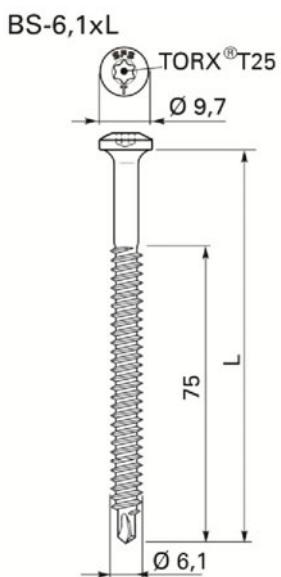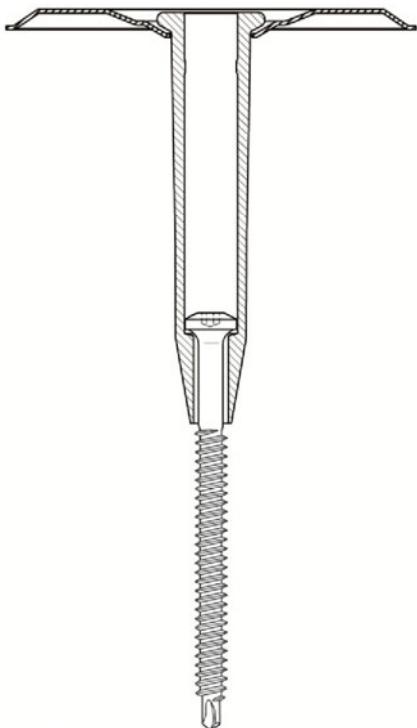


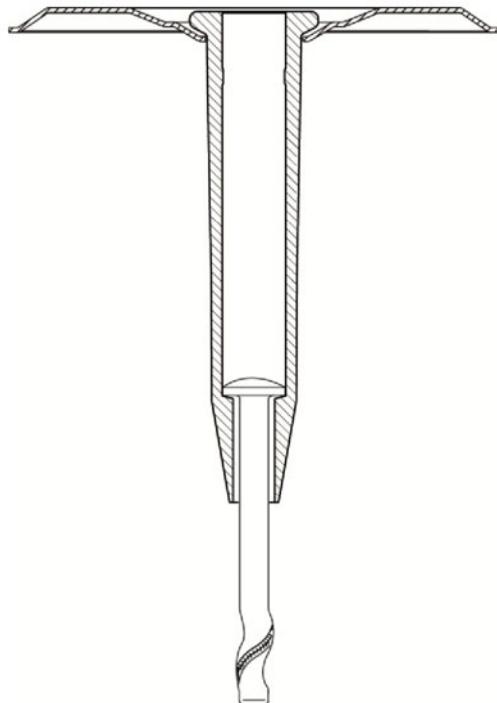


DT-4,8xL



FI-R-20xL

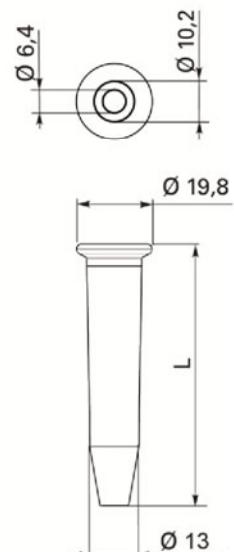


FI-P-16,0

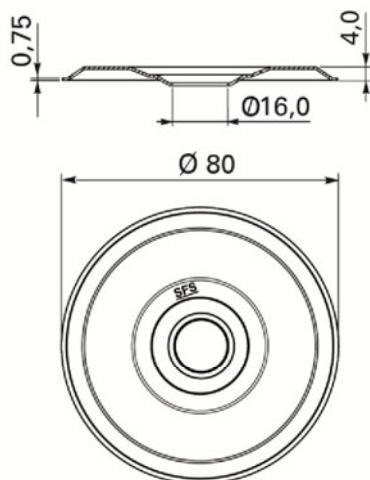


SFS intec flat roof fasteners

Combination 115
SFS intec DT-4,8xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0


Annex 115

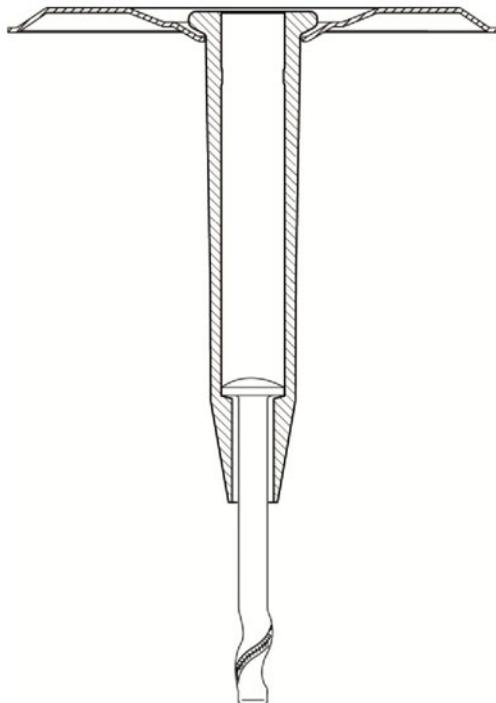


DT-S-4,8xL

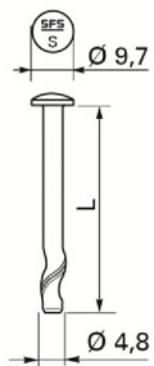

FI-R-20xL

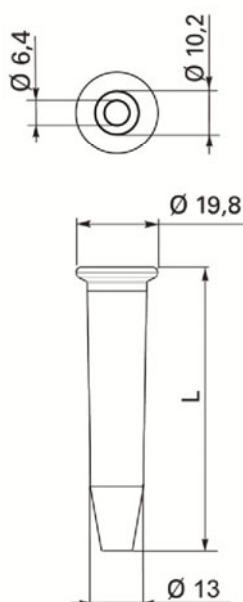





FI-P-16,0

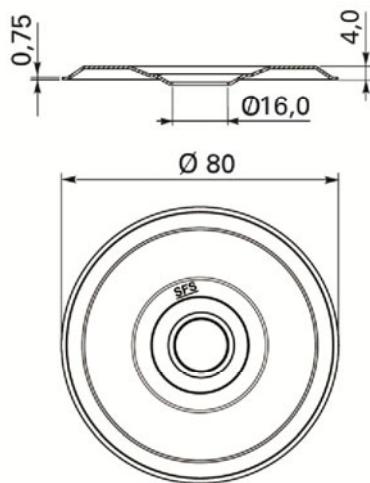

SFS intec flat roof fasteners

Combination 116
SFS intec DT-S-4,8xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0


Annex 116

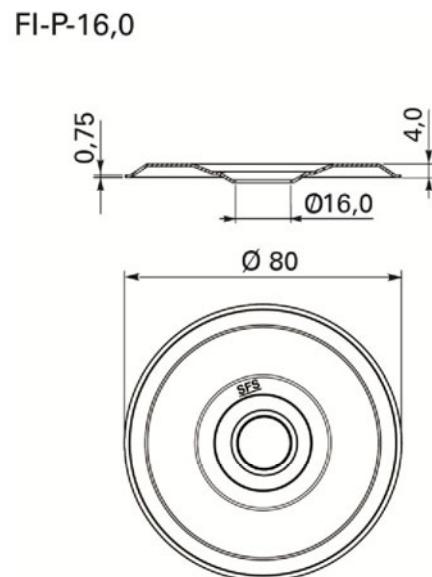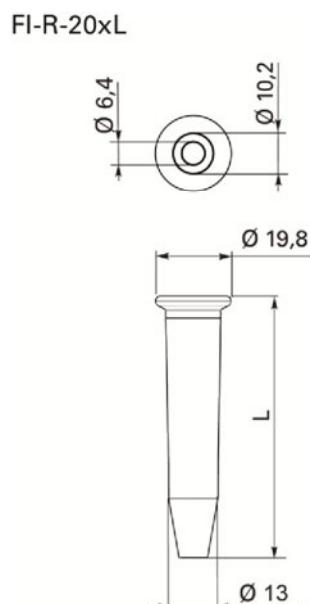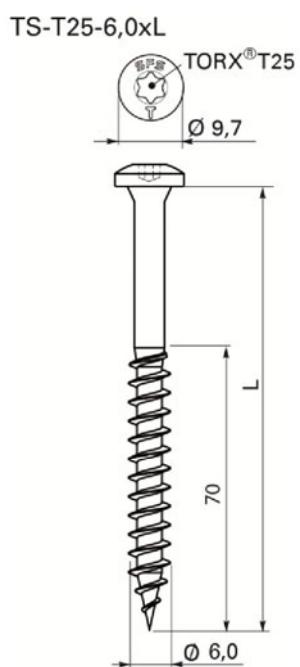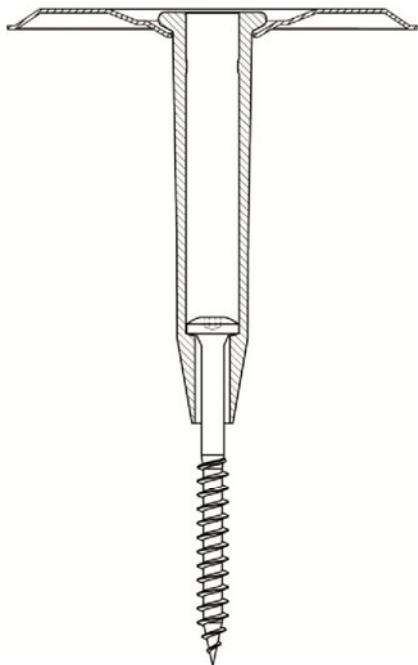


SFS intec flat roof fasteners

Combination 117
SFS intec TS-T25-6,0xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0


Annex 117

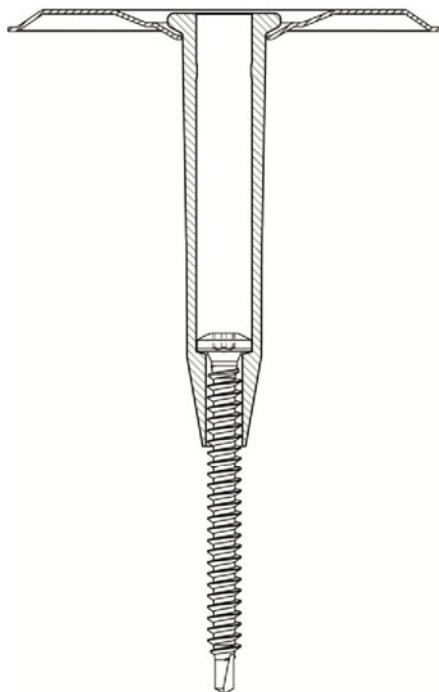


Sarnafast SBF-6,0xL

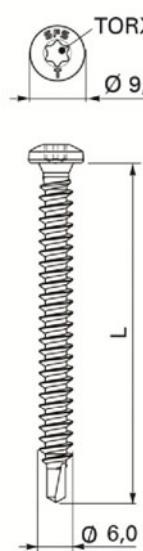

FI-R-20xL

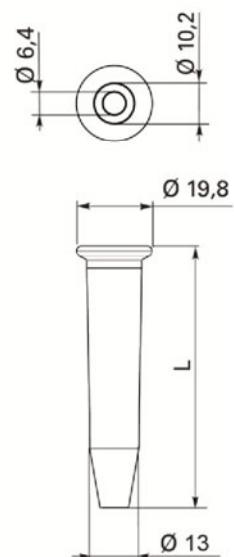


FI-P-16,0

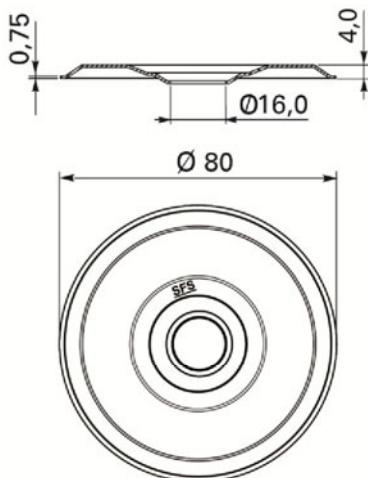


SFS intec flat roof fasteners

Combination 118
Sarnafast SBF-6,0xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0


Annex 118

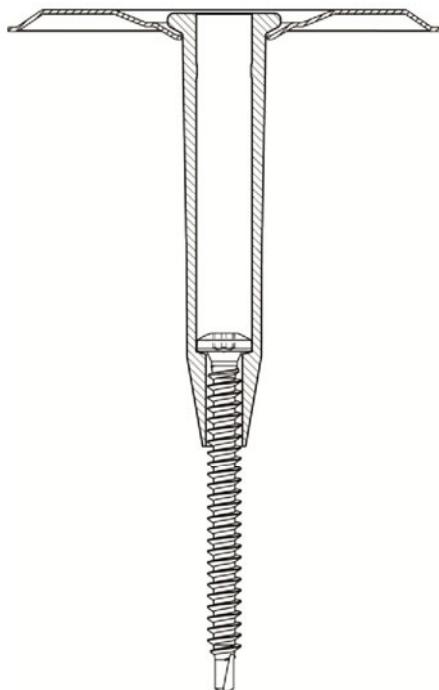


Sarnafast SBF-S-6,0xL

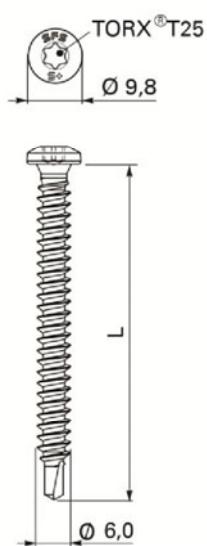

FI-R-20xL

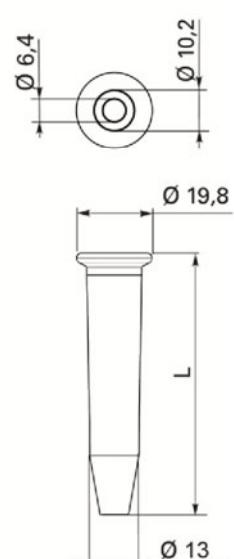


FI-P-16,0

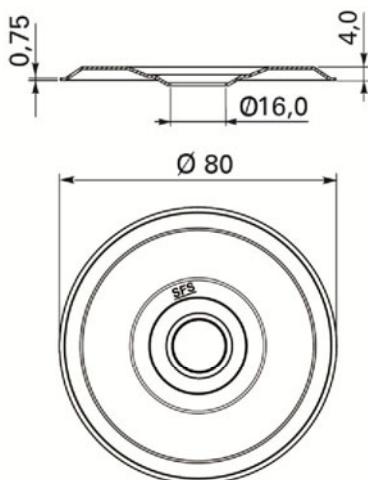


SFS intec flat roof fasteners

Combination 119
Sarnafast SBF-S-6,0xL
SFS intec FI-R-20xL
SFS intec FI-P-16,0


Annex 119

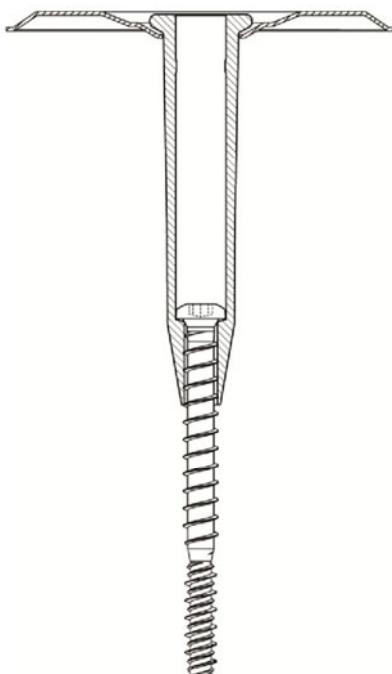


TIA-T25-6,3xL

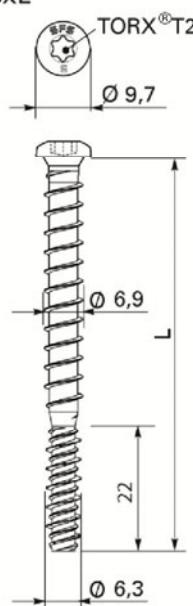


FI-R-20xL

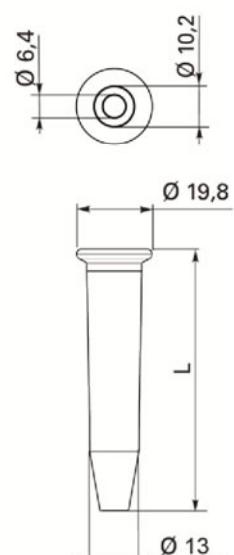


FI-P-16,0

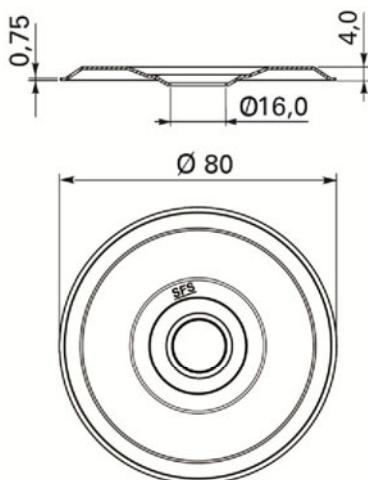


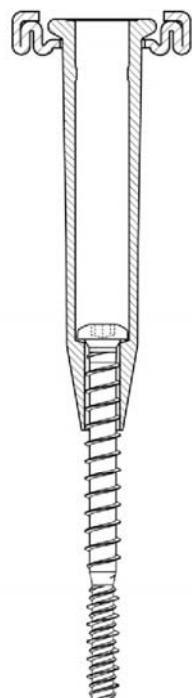


TIA-T25-6,3xL

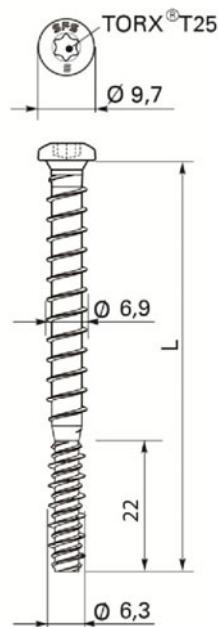

FI-R-20xL

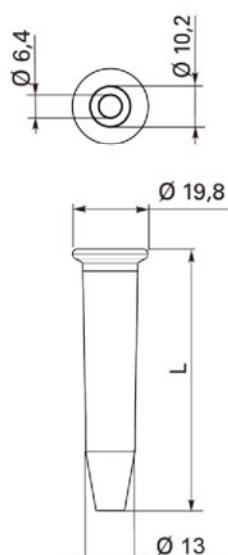


Sarnabar

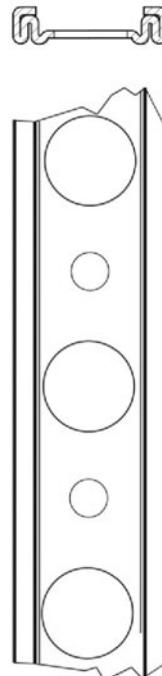


SFS intec flat roof fasteners

Combination 121
SFS intec TIA-T25-6,3xL
SFS intec FI-R-20xL
Sarnabar


Annex 121

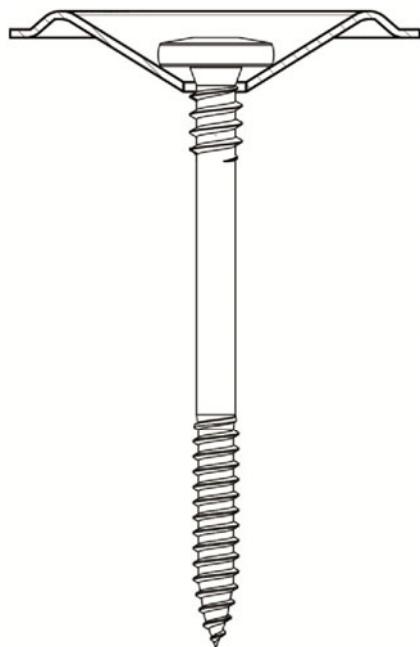

IRF-4,8xL

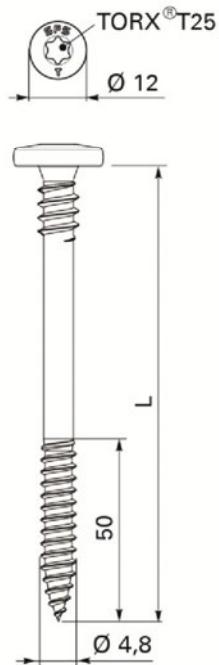


IRF-40x40

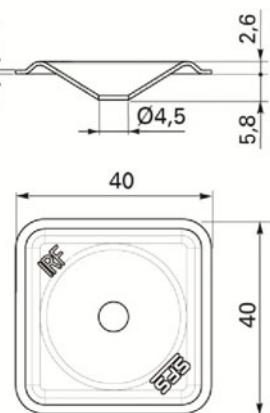


SFS intec flat roof fasteners

Combination 122
SFS intec IRF-4,8xL
SFS intec IRF-40x40


Annex 122

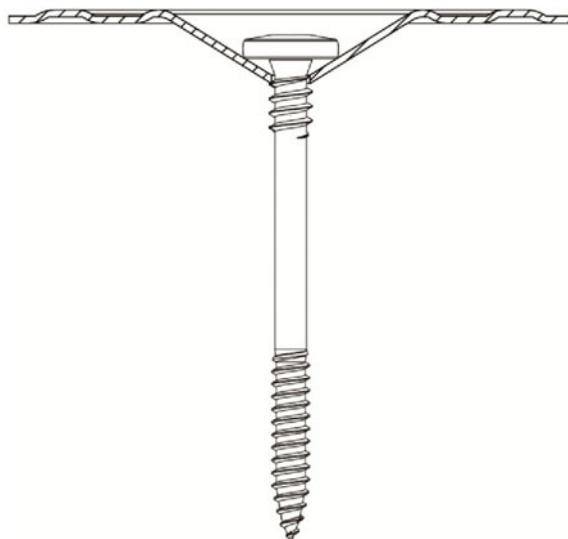

IRF-4,8xL

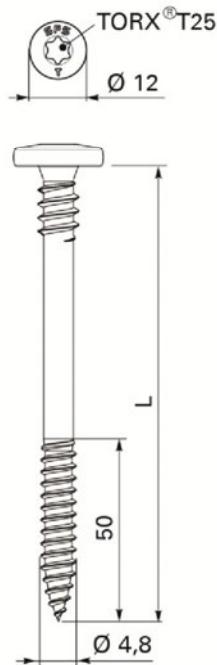


IRF-64x64

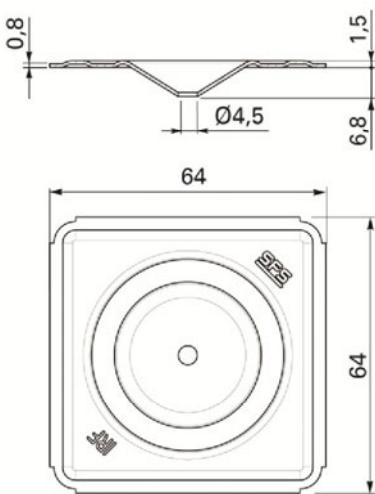


SFS intec flat roof fasteners

Combination 123
SFS intec IRF-4,8xL
SFS intec IRF-64x64


Annex 123

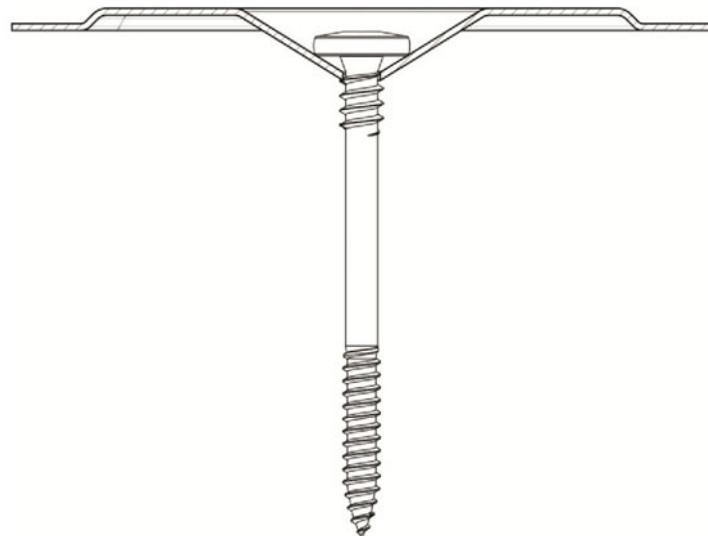


IRF-4,8xL

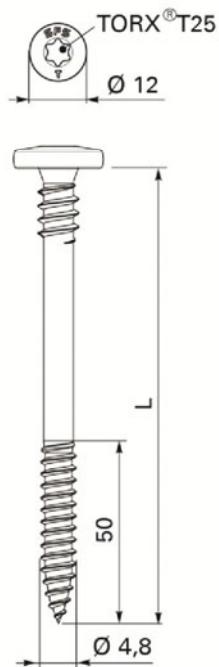


IRF-82x40

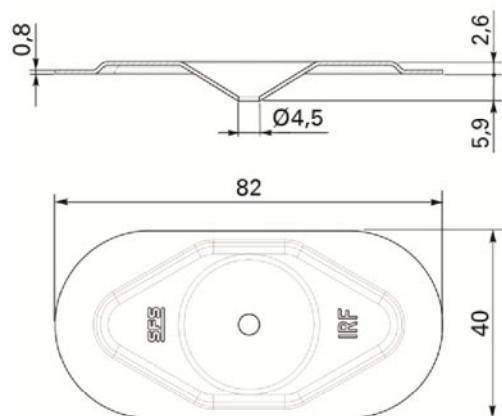




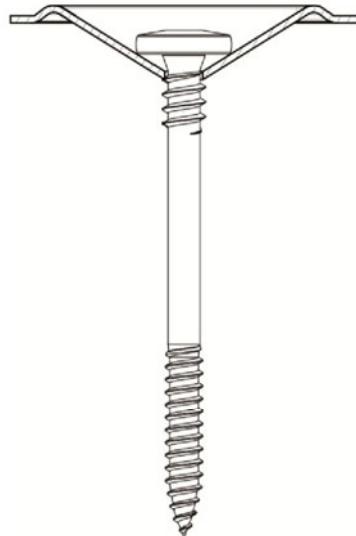


IRF-4,8xL

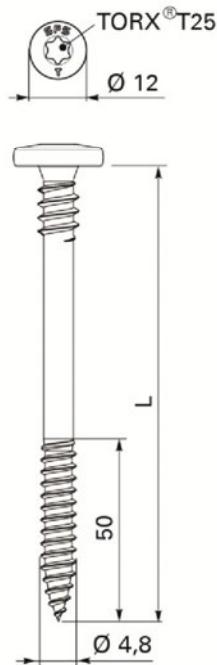

IRF-40



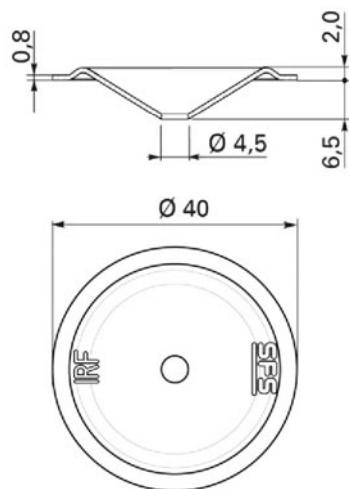


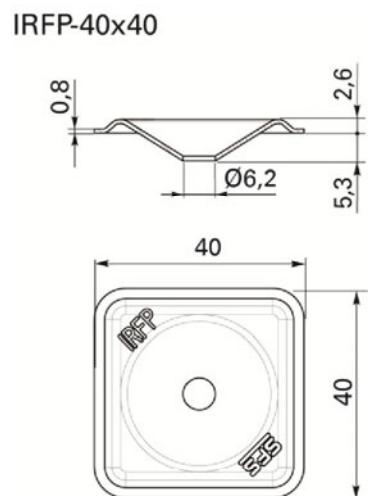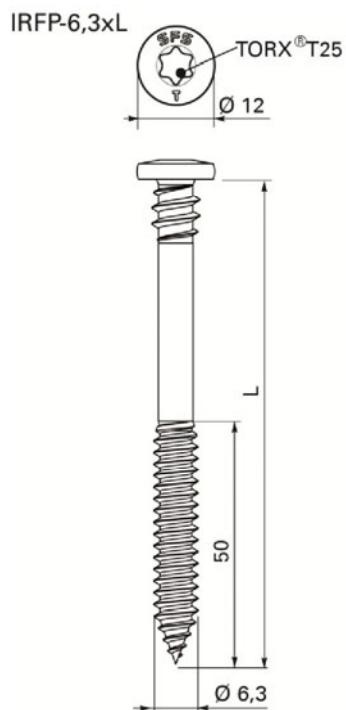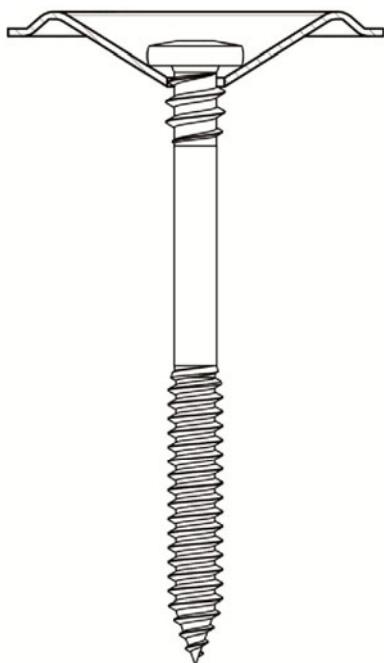

SFS intec flat roof fasteners

Combination 126
SFS intec IRFP-6,3xL
SFS intec IRFP-40x40




Annex 126

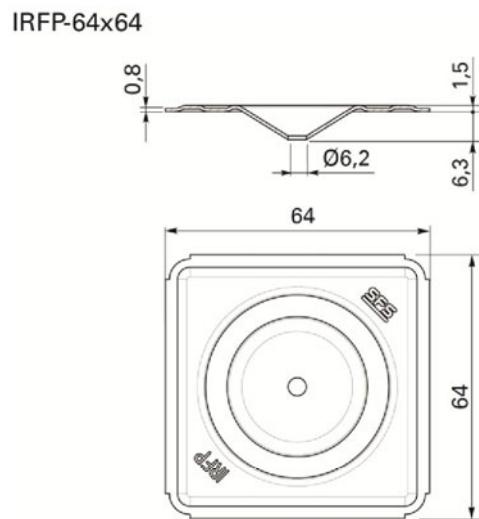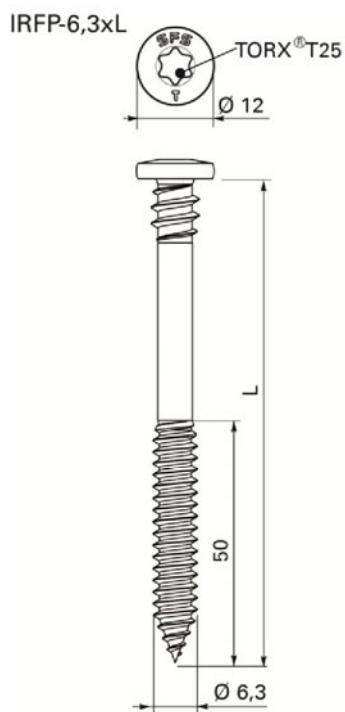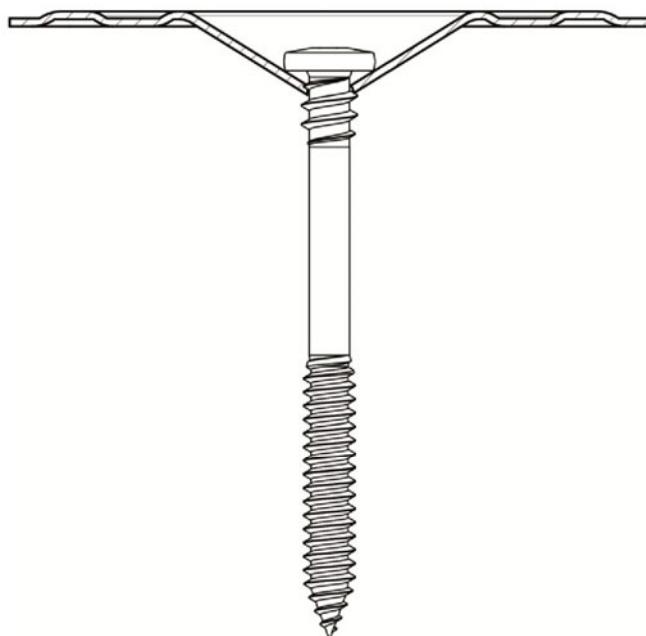

SFS intec flat roof fasteners

Combination 127
SFS intec IRFP-6,3xL
SFS intec IRFP-64x64




Annex 127

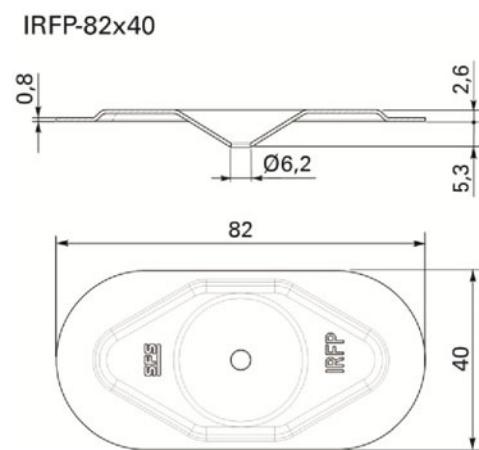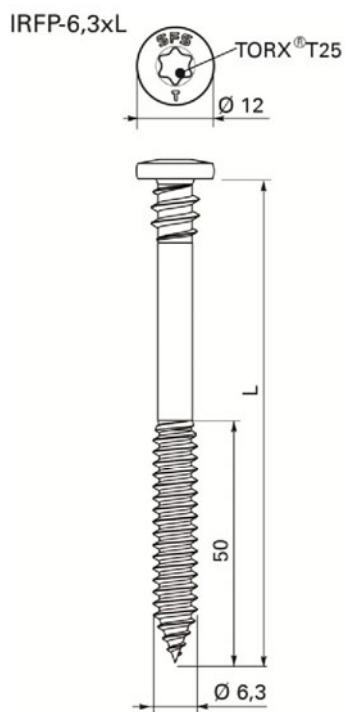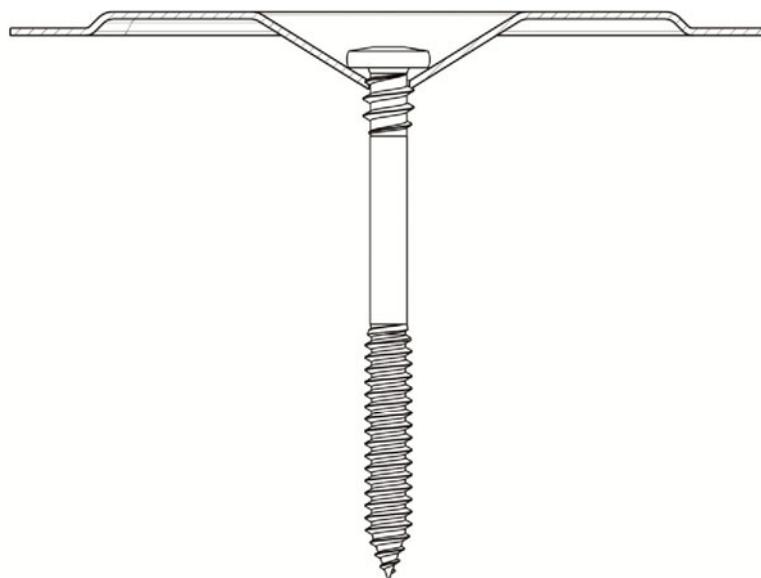


SFS intec flat roof fasteners

Combination 128
SFS intec IRFP-6,3xL
SFS intec IRFP-82x40

Annex 128

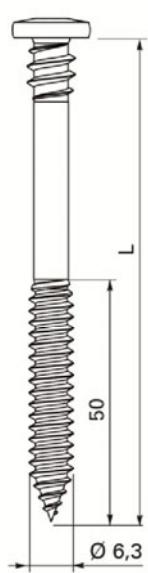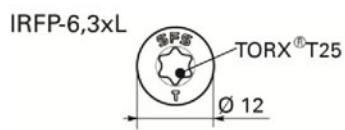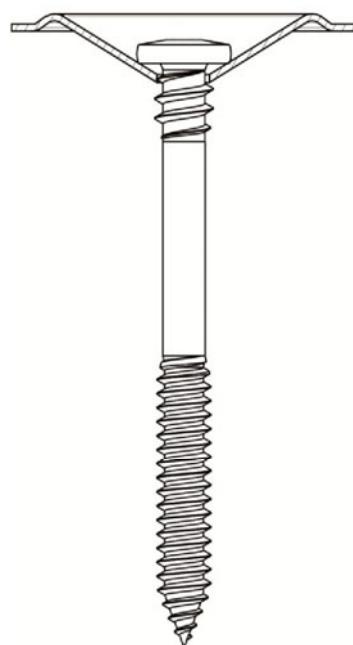


IRFP-40

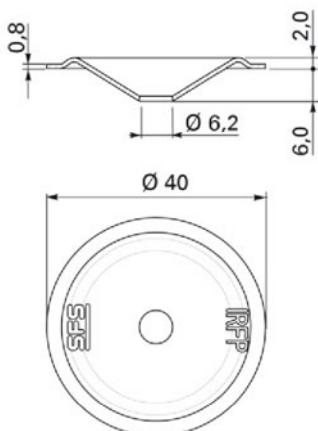


SFS intec flat roof fasteners

Combination 129
SFS intec IRFP-6,3xL
SFS intec IRFP-40


Annex 129

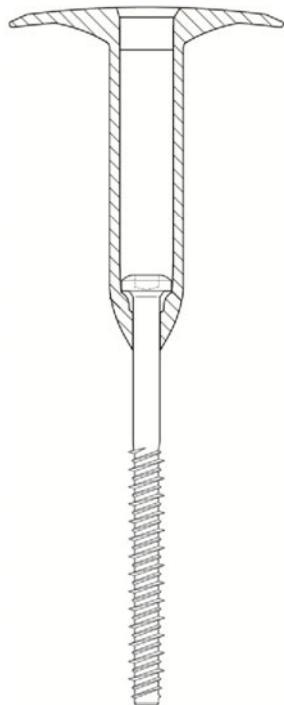


TI-T25-6,3xL


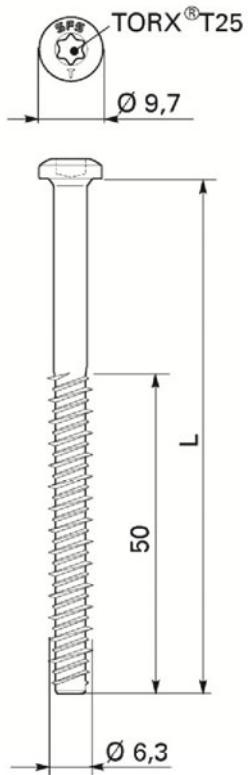


SRT-L

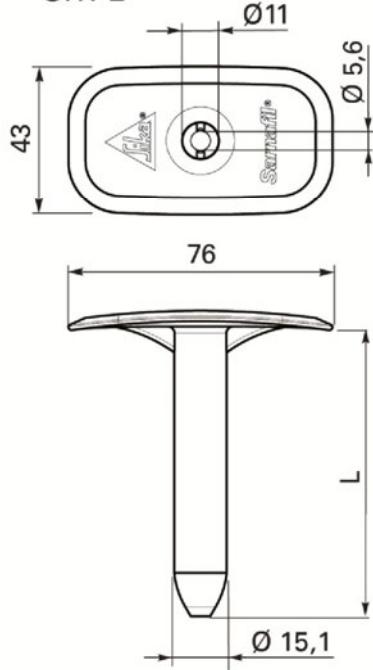


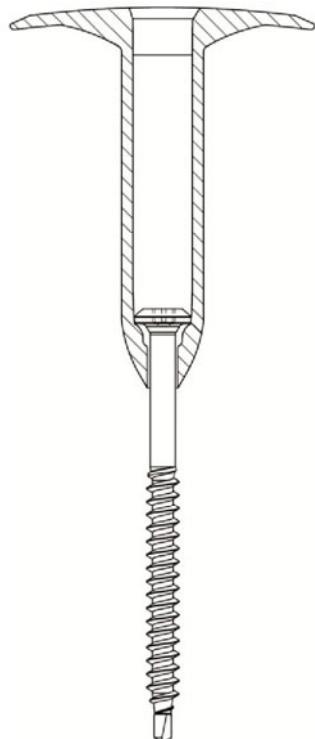

Sarnafast SBF-6,0xL

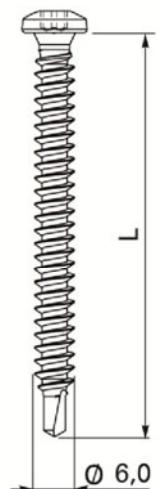


SRT-L

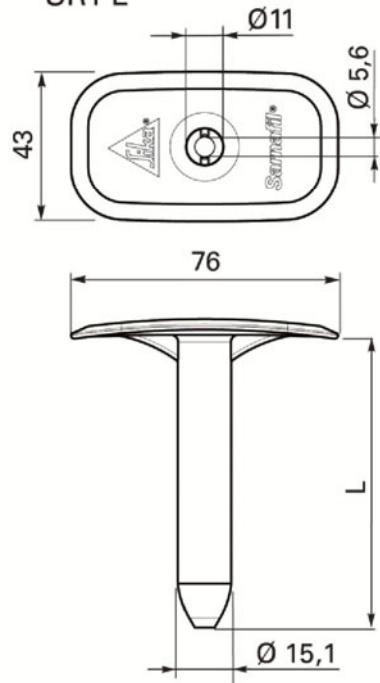


SFS intec flat roof fasteners

Combination 131
Sarnafast SBF-6,0xL
SFS intec SRT-L


Annex 131

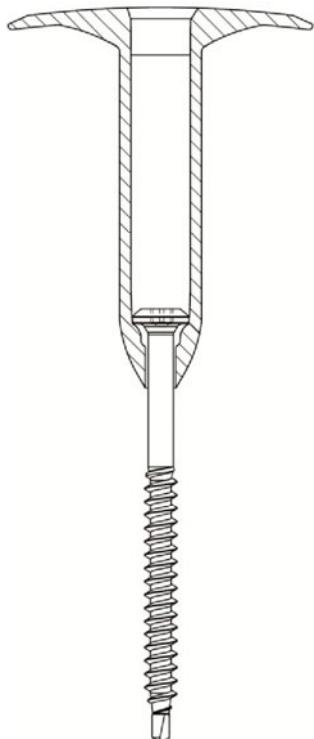

Sarnafast SBF-S-6,0xL

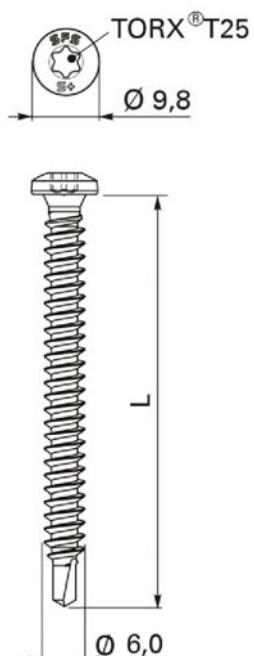


SRT-L

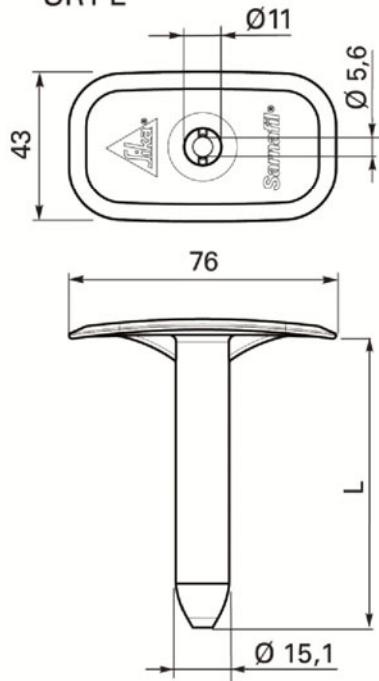


SFS intec flat roof fasteners

Combination 132
Sarnafast SBF-S-6,0xL
SFS intec SRT-L


Annex 132

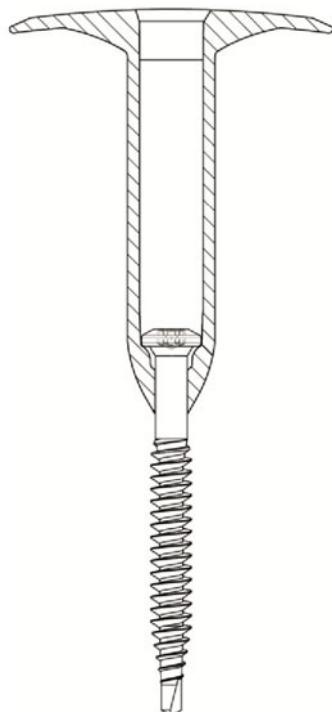

BS-6,7xL

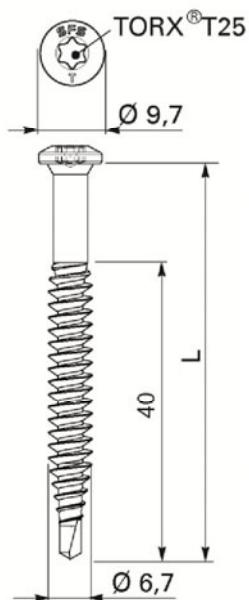


SRT-L

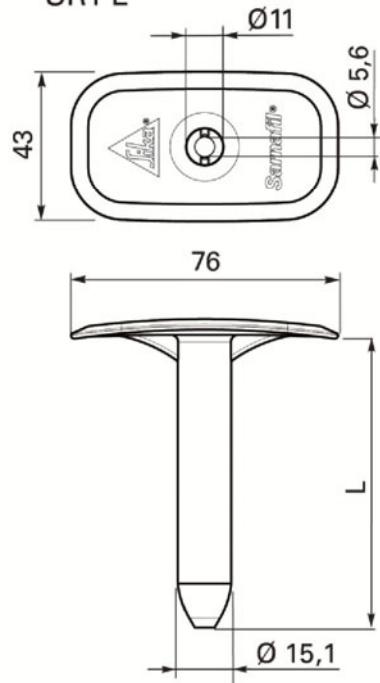


SFS intec flat roof fasteners

Combination 133
SFS intec BS-6,7xL
SFS intec SRT-L


Annex 133

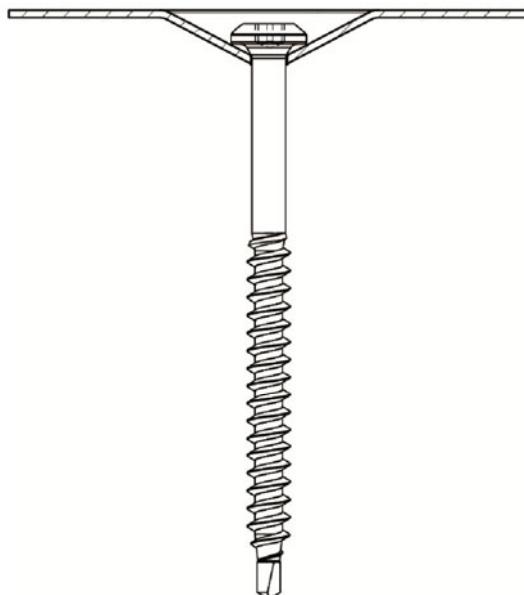

Sarnafast SB-6,3xL

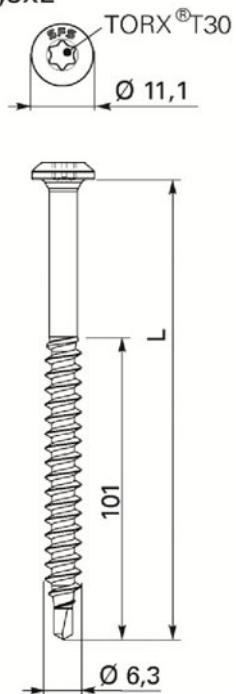


Sarnafast DTL-70x70

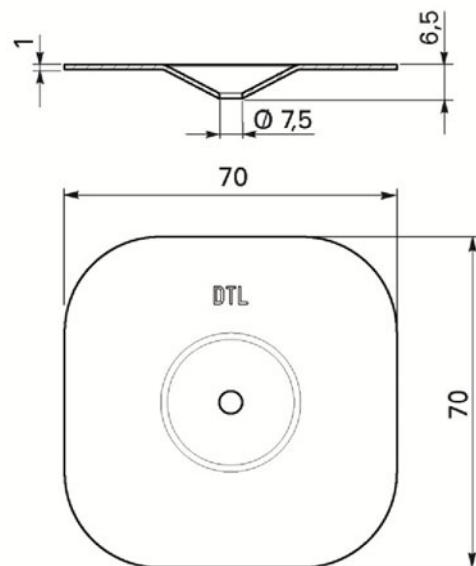


SFS intec flat roof fasteners

Combination 134
Sarnafast SB-6,3xL
Sarnafast DTL-70x70


Annex 134

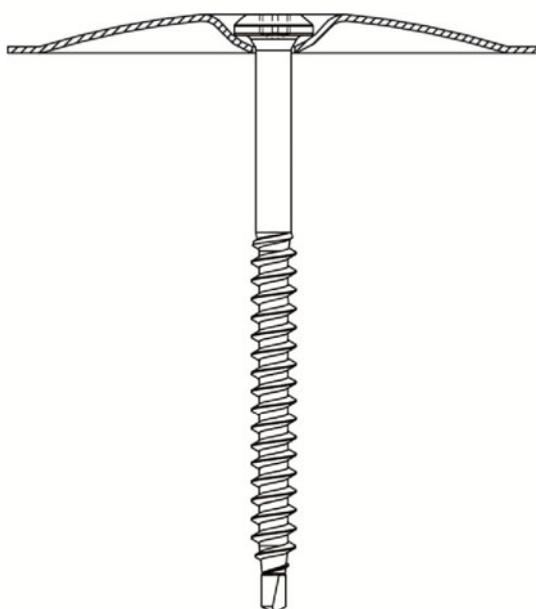


Sarnafast SB-6,3xL

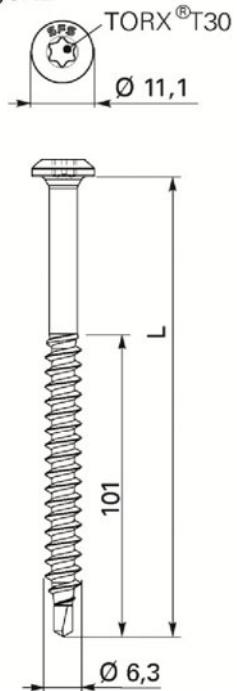


IF/IG-C-82x40

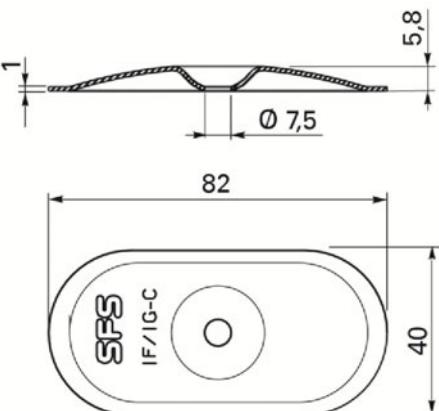


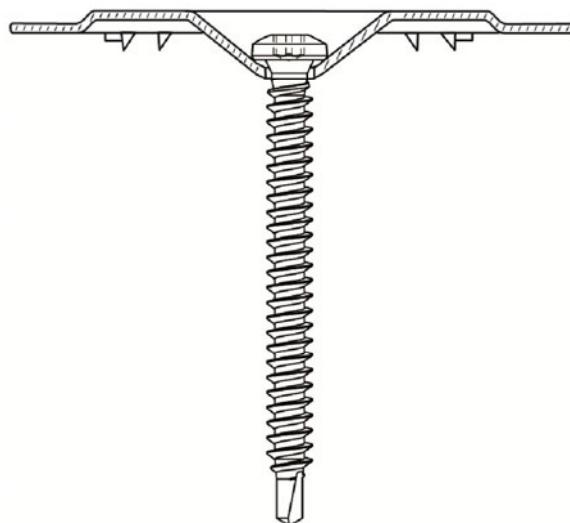

Sarnafast SBF-6,0xL

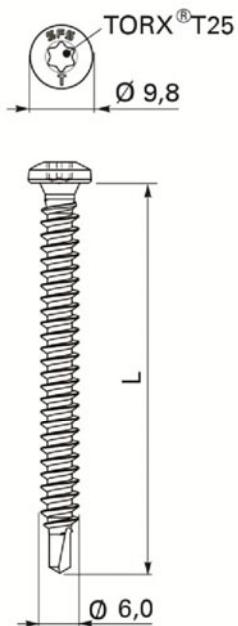


Sarnafast KTL-82x40

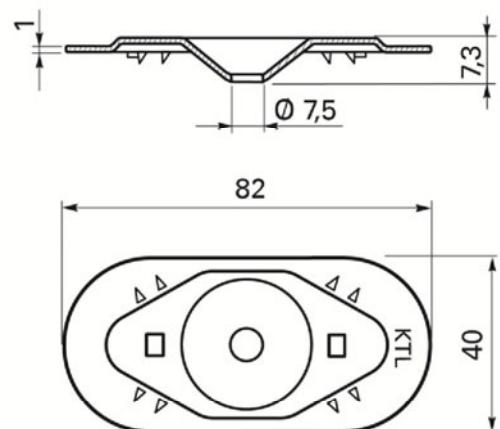


SFS intec flat roof fasteners

Combination 136
Sarnafast SBF-6,0xL
Sarnafast KTL-82x40


Annex 136

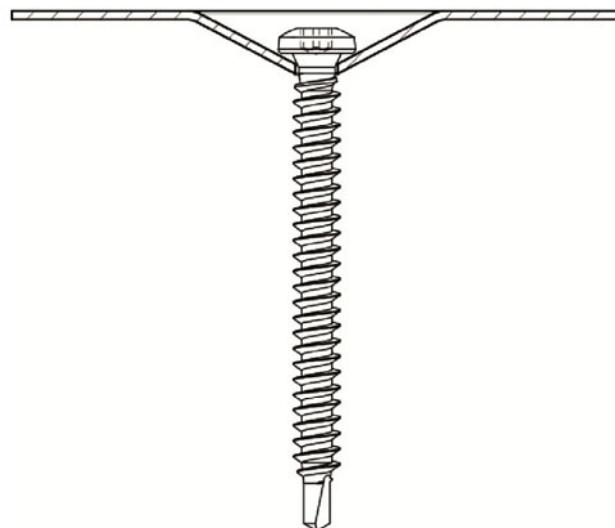

Sarnafast SBF-6,0xL

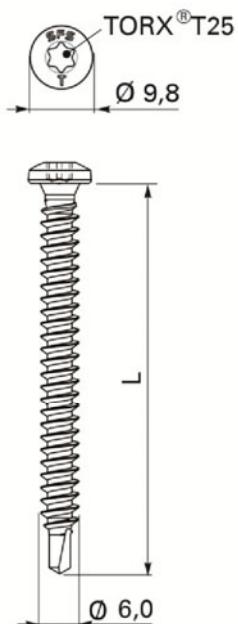


Sarnafast DTL-70x70

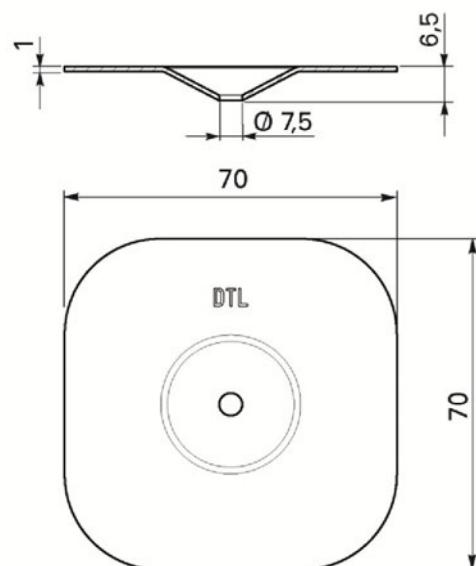


SFS intec flat roof fasteners

Combination 137
Sarnafast SBF-6,0xL
Sarnafast DTL-70x70


Annex 137

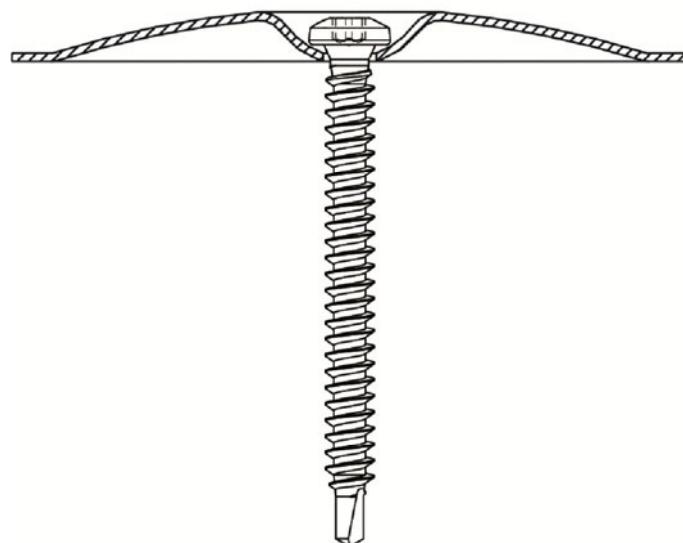


Sarnafast SBF-6,0xL

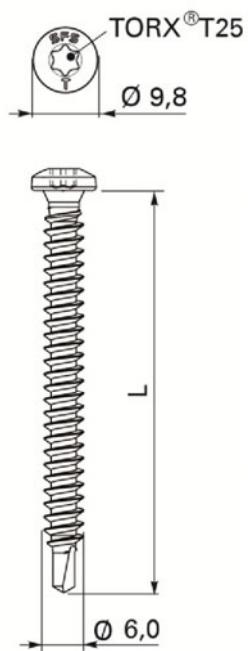


IF/IG-C-82x40

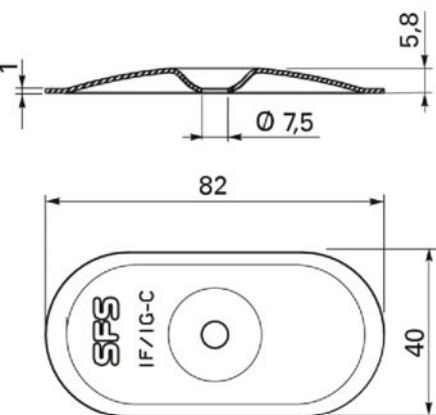


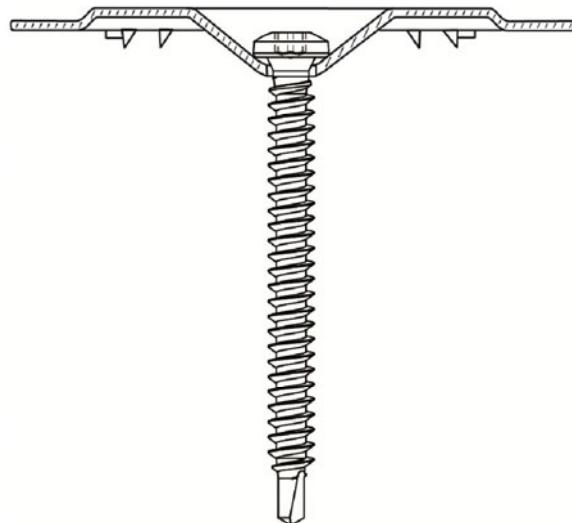


Sarnafast SBF-S-6,0xL

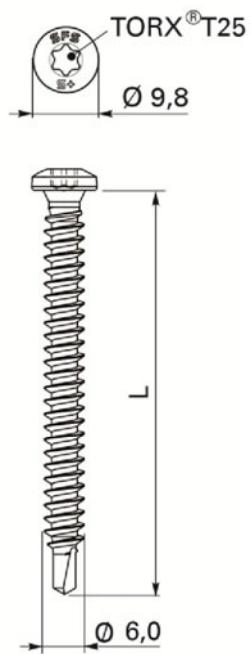


Sarnafast KTL-82x40

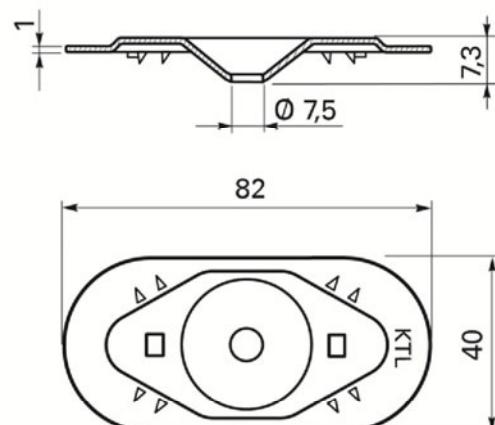


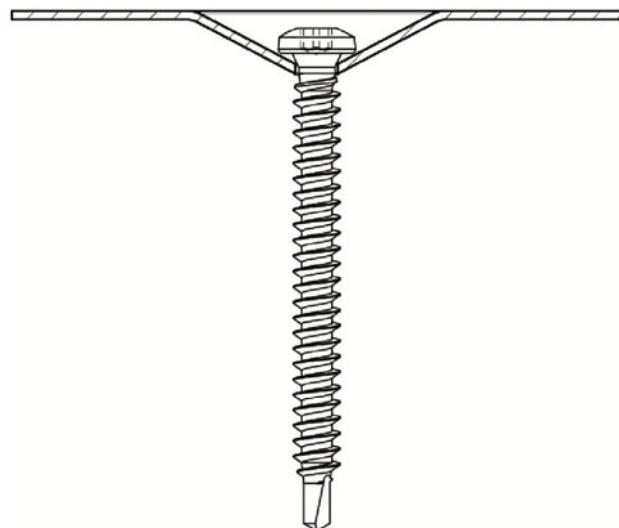


Sarnafast SBF-S-6,0xL

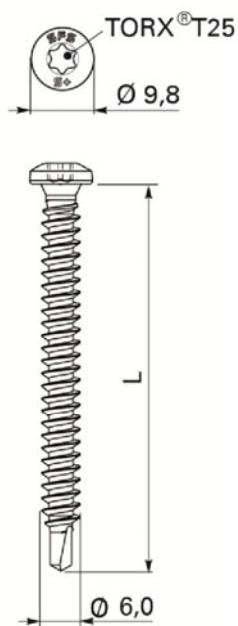


Sarnafast DTL-70x70

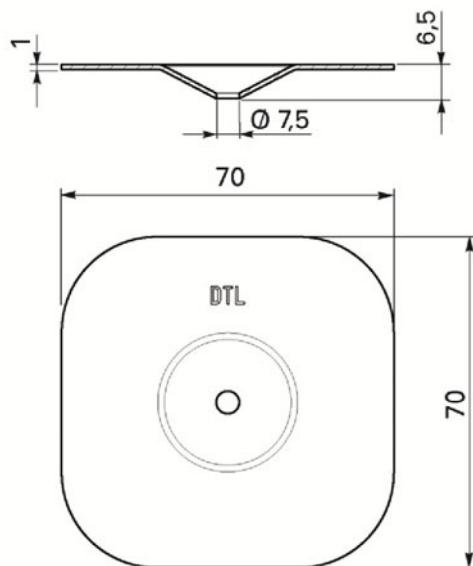


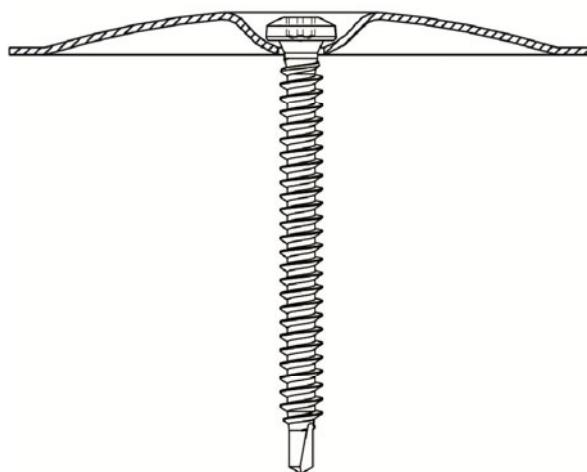


Sarnafast SBF-S-6,0xL


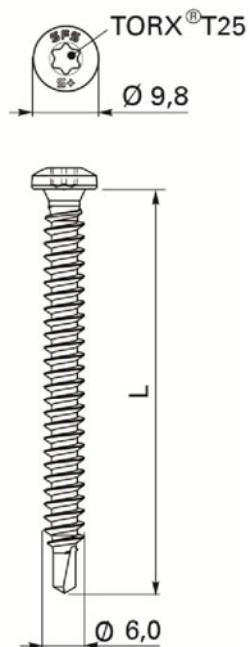


IF/IG-C-82x40


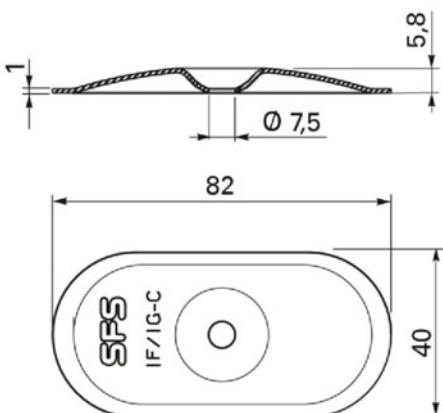


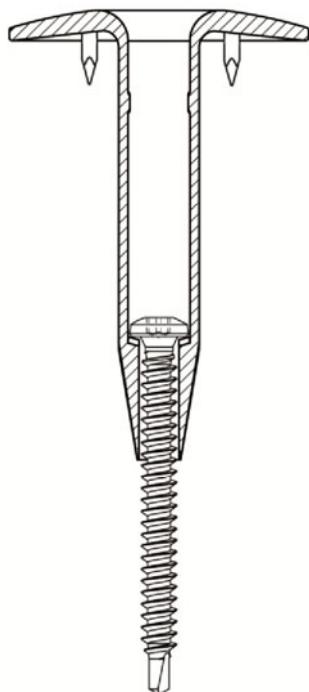

Sarnafast SBF-S-6,0xL

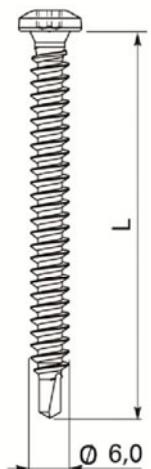

Sarnafast Tube SFT-50xL

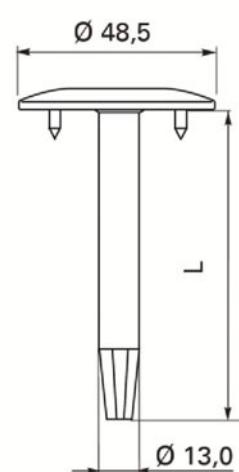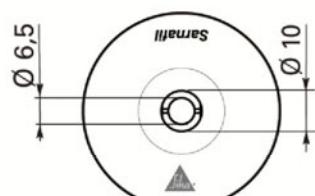


SFS intec flat roof fasteners

Combination 142
Sarnafast SBF-S-6,0xL
Sarnafast Tube SFT-50xL


Annex 142




Sarnafast SBF-S-6,0xL

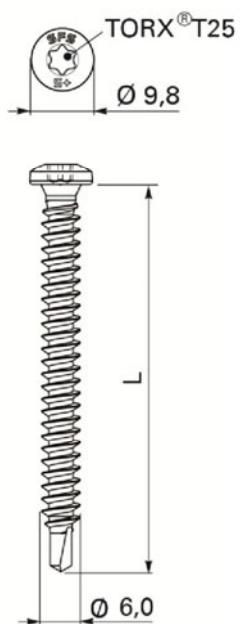


Sarnabar Tube SBT-20xL

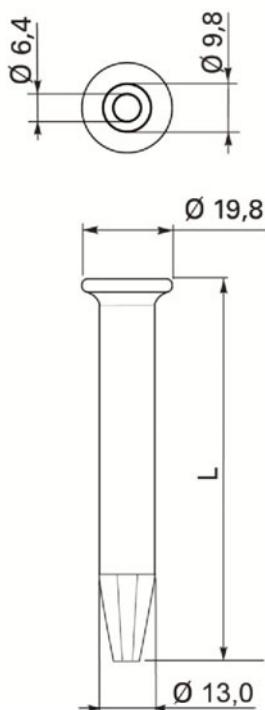


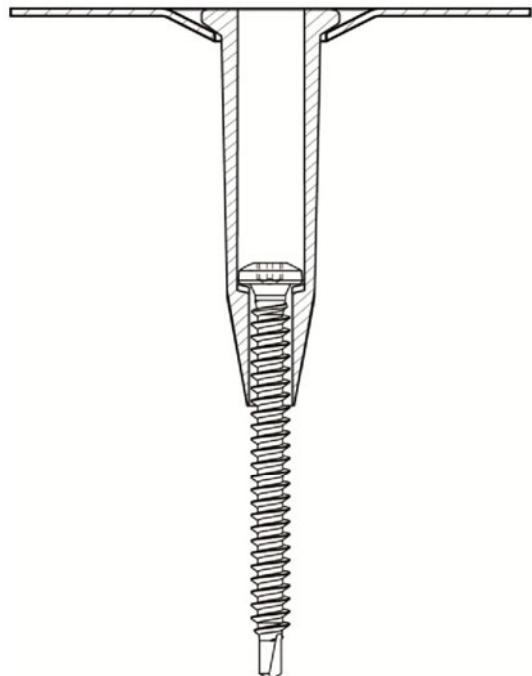


Sarnafast SBF-6,0xL

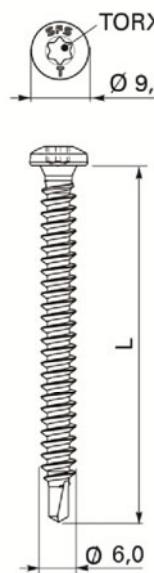


Sarnabar Tube SBT-20xL

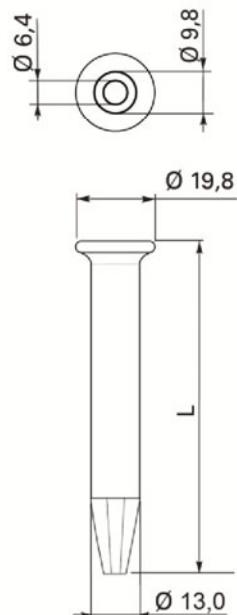


SBIW-70x70

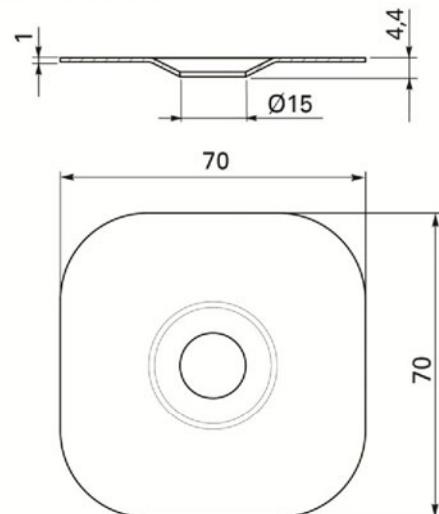


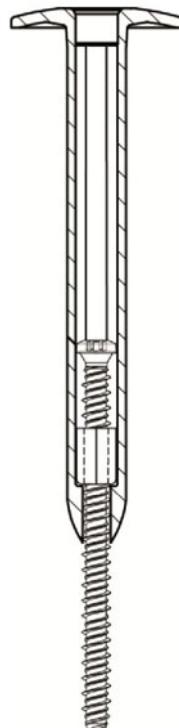


TIF-N-6,3xL

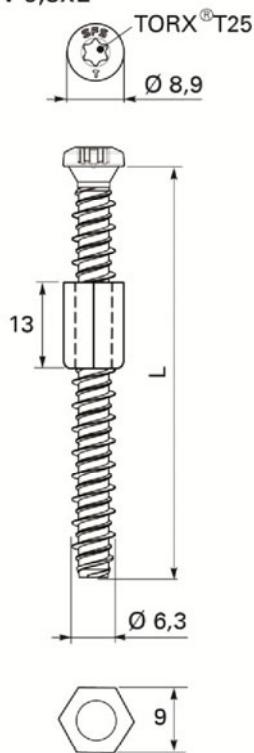


RH45xL

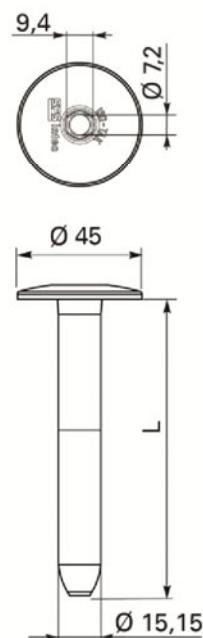


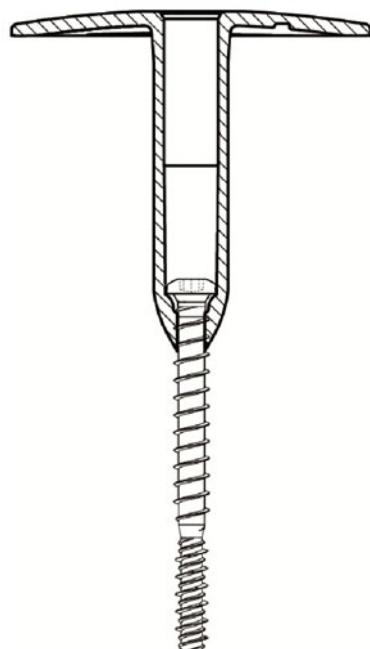

TIA-T25-6,3xL

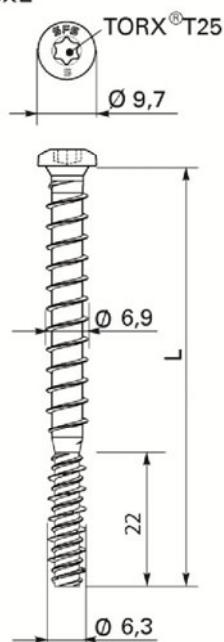


R75xL

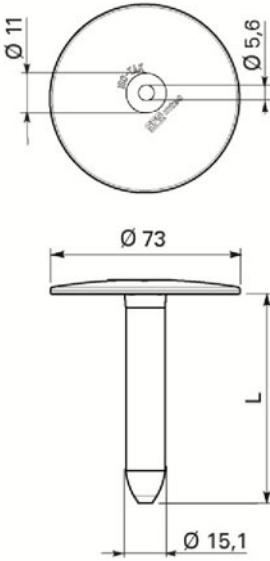


SFS intec flat roof fasteners

Combination 146
SFS intec TIA-T25-6,3xL
SFS intec R75xL


Annex 146

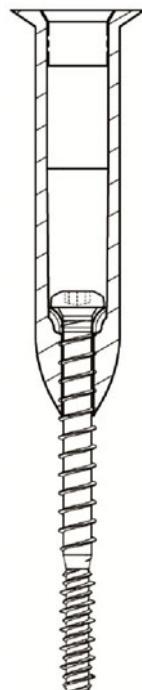

TIA-T25-6,3xL

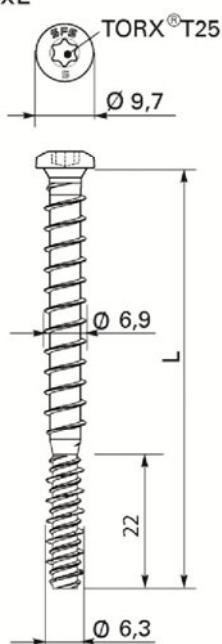

ST-25xL

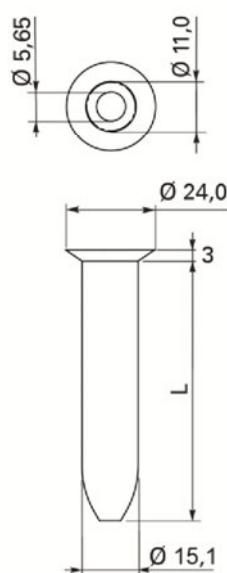


SFS intec flat roof fasteners

Combination 147
SFS intec TIA-T25-6,3xL
SFS intec ST-25xL


Annex 147



BS-4,8xL

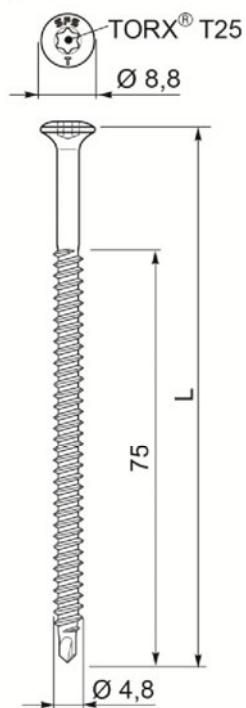


ST-25xL

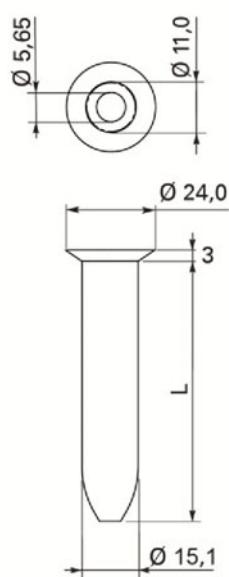


SFS intec flat roof fasteners

Combination 148
SFS intec BS-4,8xL
SFS intec ST-25xL


Annex 148

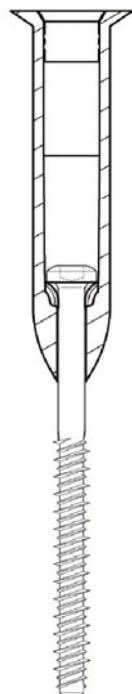

TI-T25-6,3xL

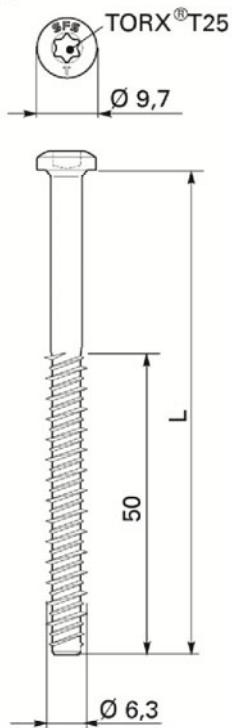


ST-25xL

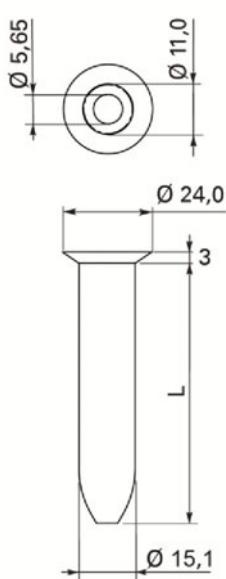


SFS intec flat roof fasteners

Combination 149
SFS intec TI-T25-6,3xL
SFS intec ST-25xL


Annex 149

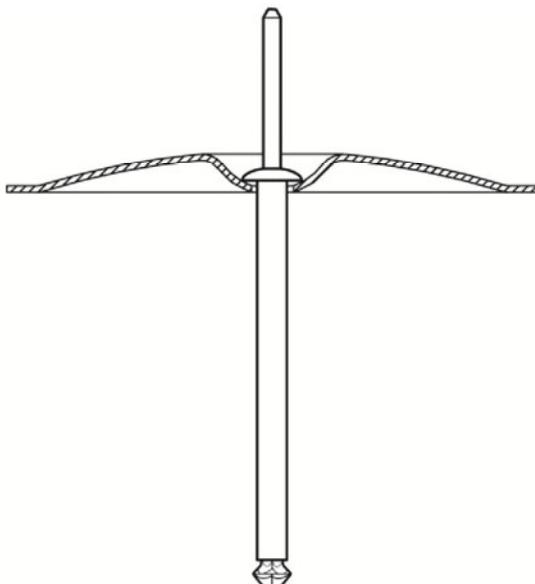


TPR-L-6,3xL

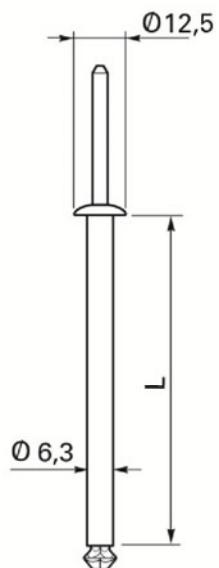


IF/IG-C-82x40

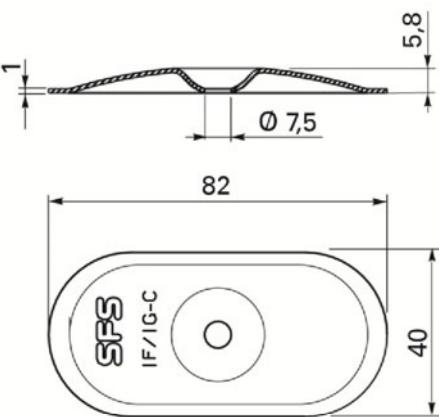


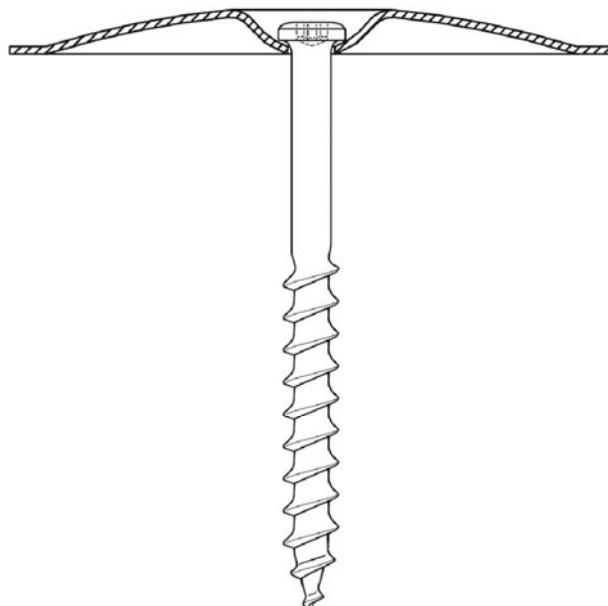


LBS-S-T25-8,0xL

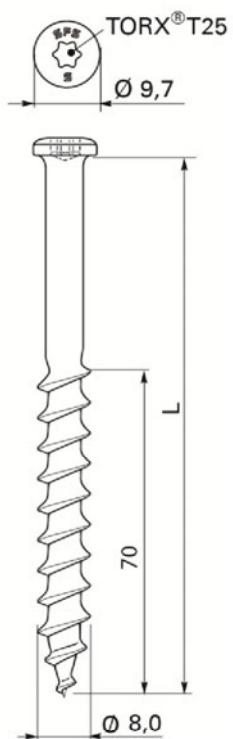


IF/IG-C-82x40

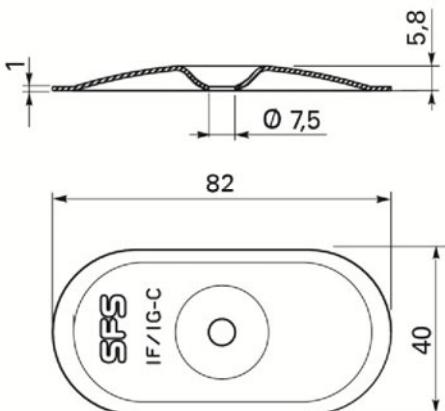


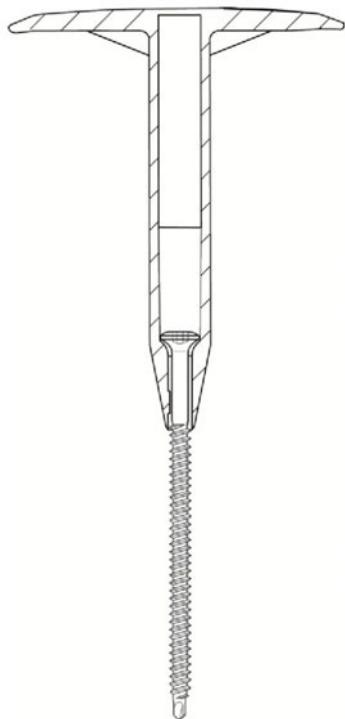

BS-4,8xL

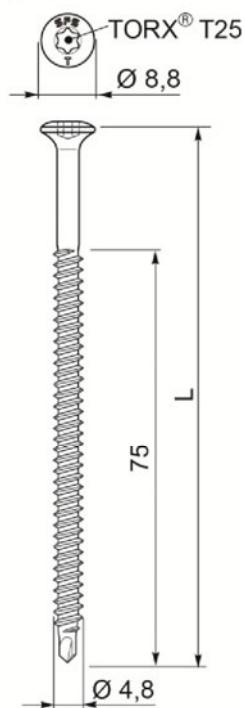


NPPxL

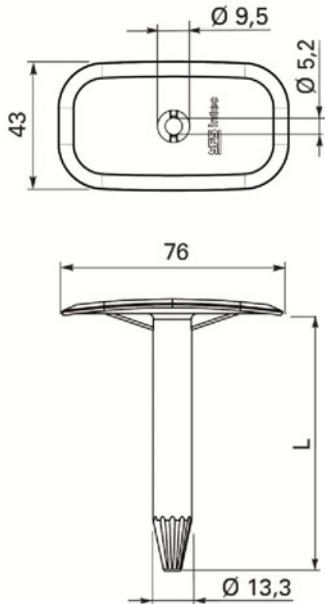


SFS intec flat roof fasteners


Combination 152
SFS intec BS-4,8xL
SFS intec NPPxL

Annex 152

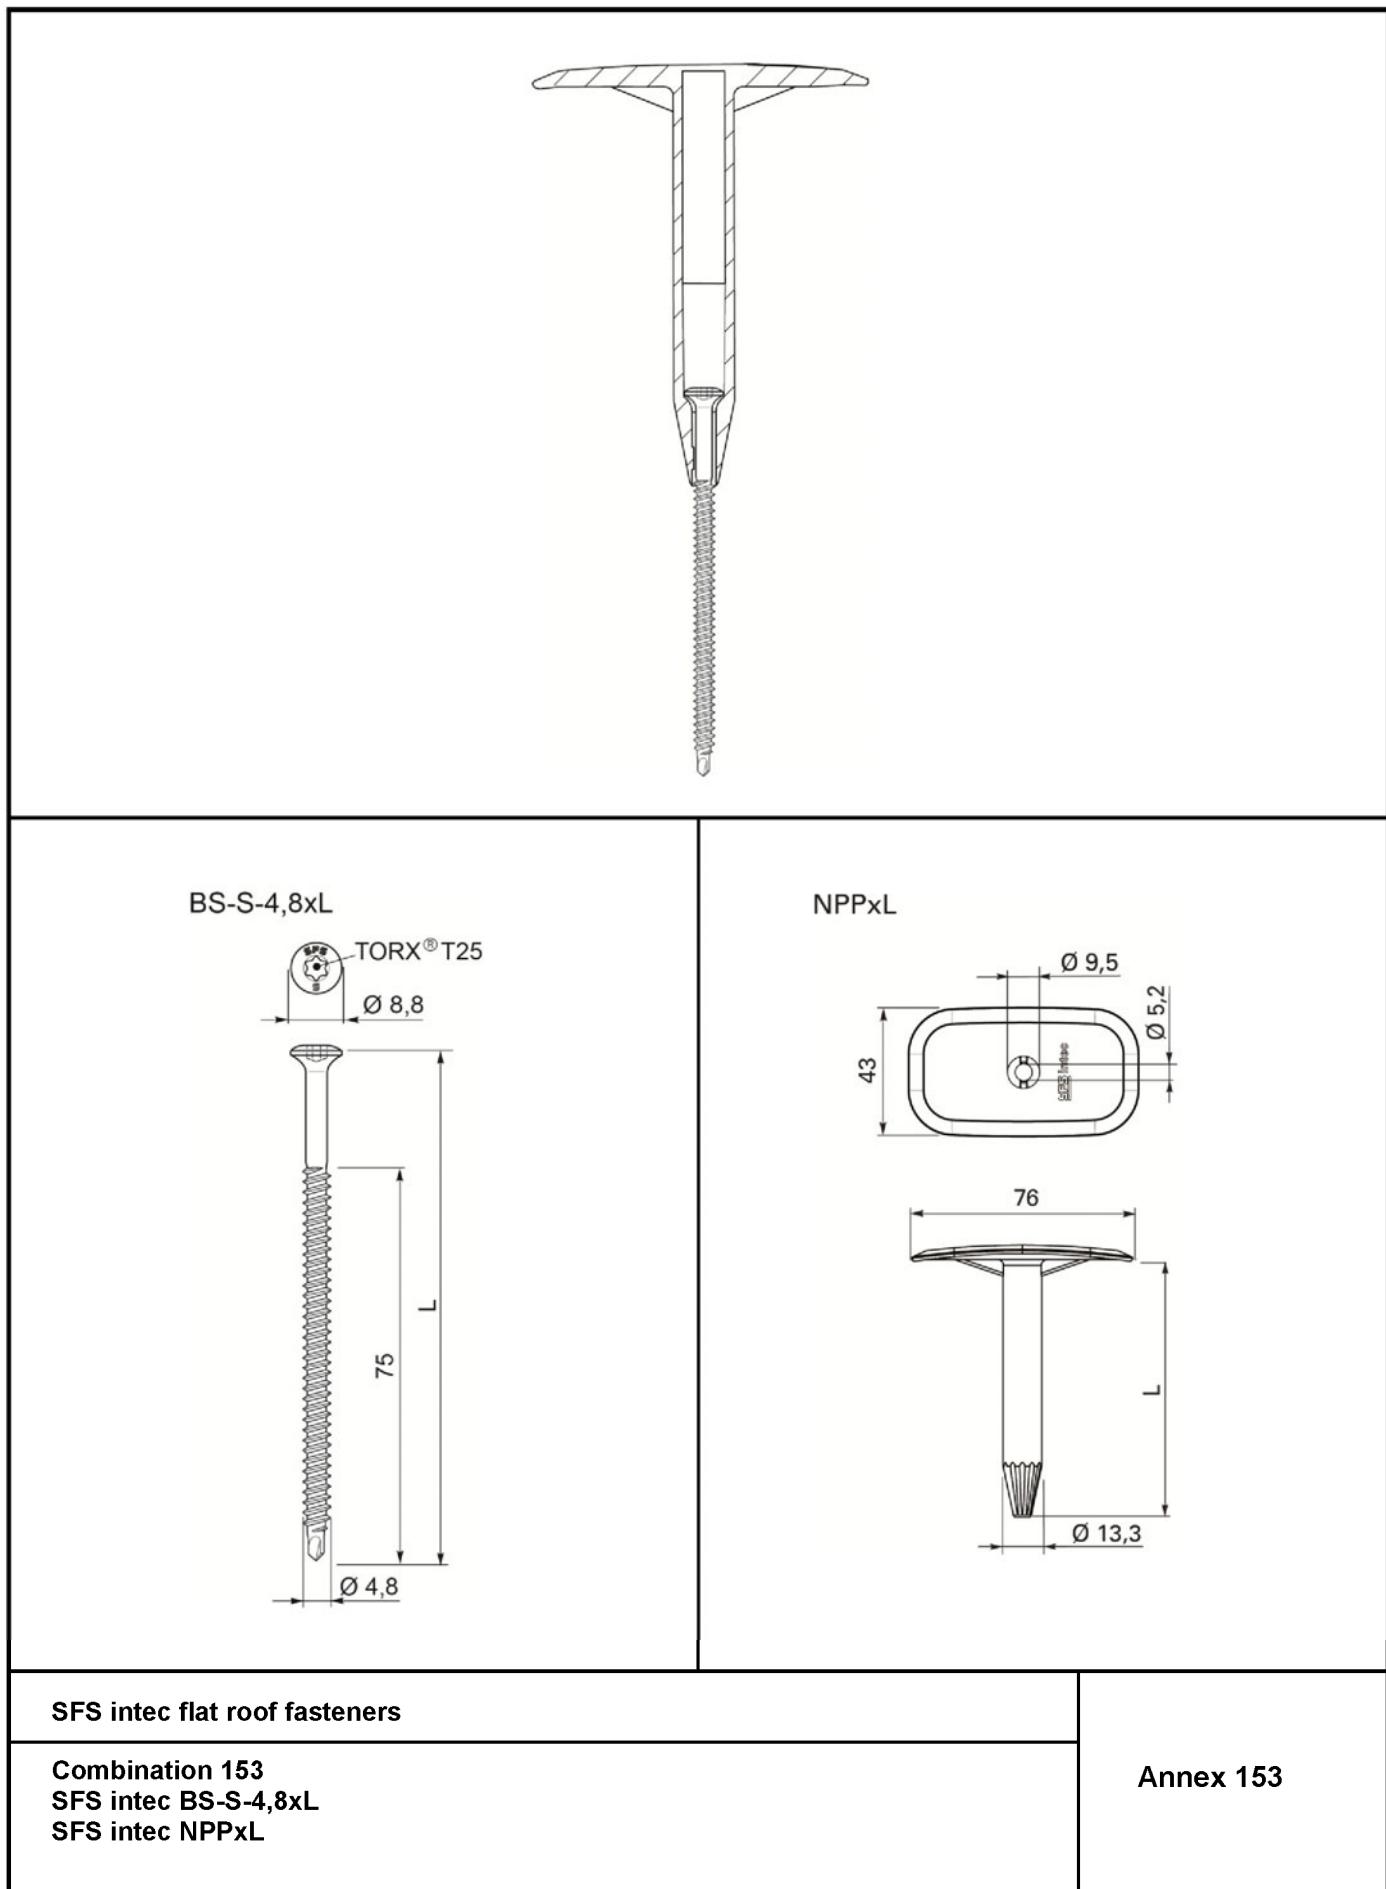


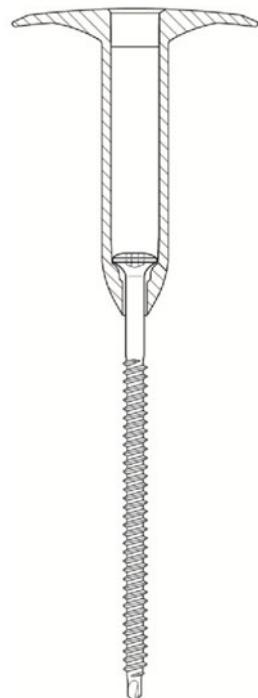

BS-4,8xL

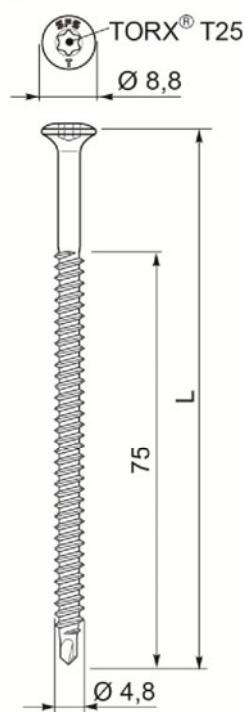


NPSxL

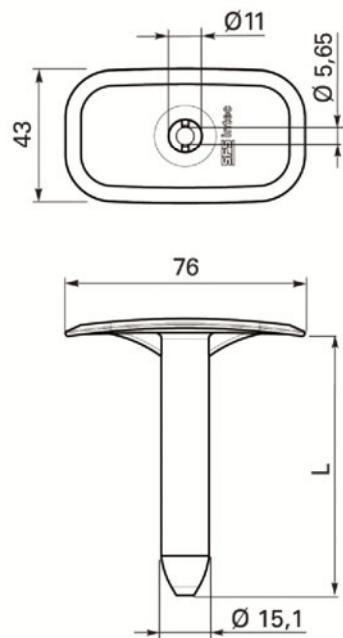


SFS intec flat roof fasteners

Combination 154
SFS intec BS-4,8xL
SFS intec NPSxL


Annex 154

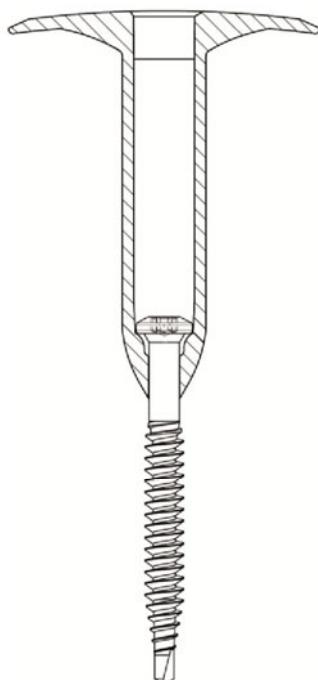

BS-6,7xL

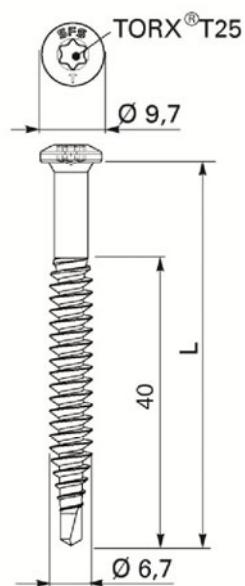


NPSxL

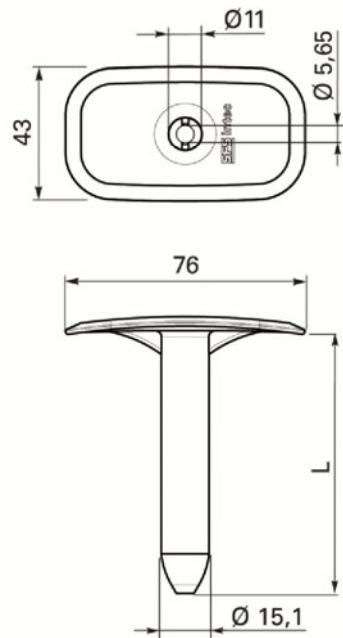


SFS intec flat roof fasteners

Combination 155
SFS intec BS-6,7xL
SFS intec NPSxL


Annex 155

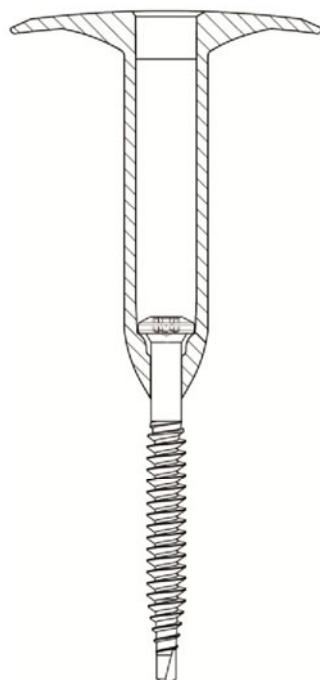

BS-S-6,7xL

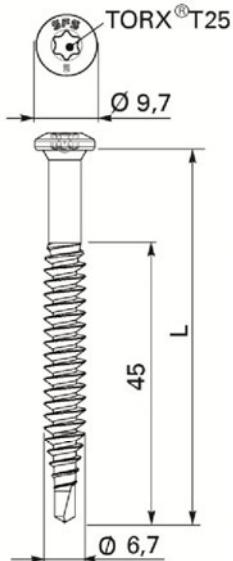


NPSxL

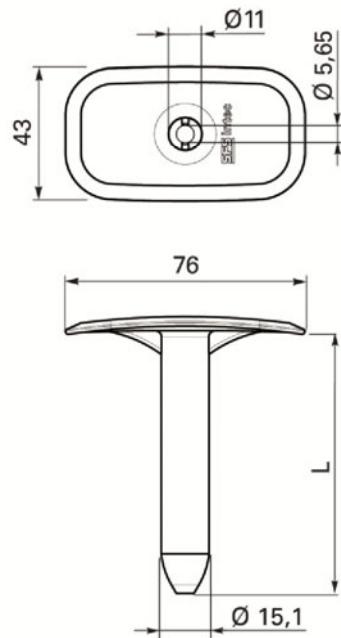


SFS intec flat roof fasteners

Combination 156
SFS intec BS-S-6,7xL
SFS intec NPSxL


Annex 156

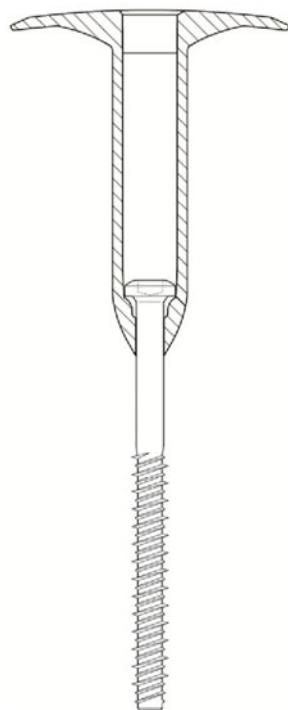

TI-T25-6,3xL

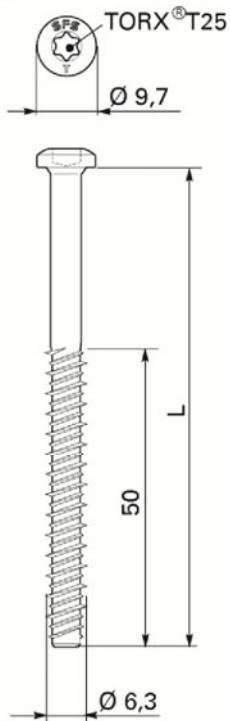


NPSxL

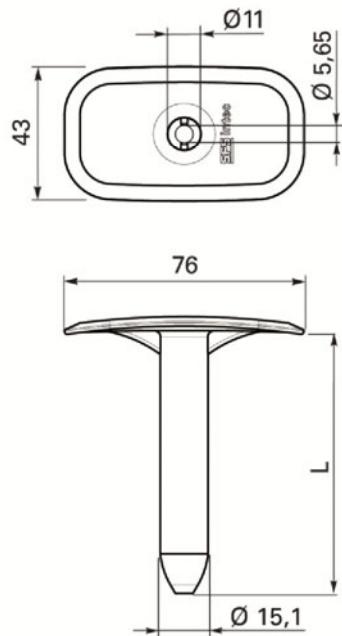


SFS intec flat roof fasteners

Combination 157
SFS intec TI-T25-6,3xL
SFS intec NPSxL


Annex 157

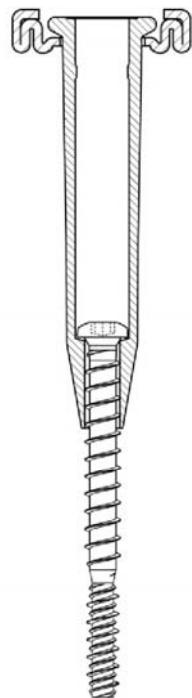


TIA-T25-6,3xL

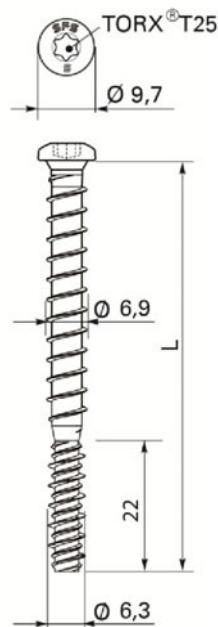

Sarnabar Tube SBT-20xL

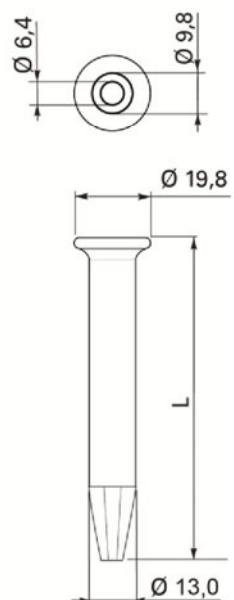

Sarnabar

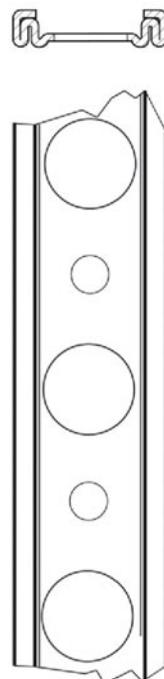

SFS intec flat roof fasteners

Combination 158
SFS intec TIA-T25-6,3xL
Sarnabar Tube SBT-20xL
Sarnabar

Annex 158

Annex	SFS intec flat roof fasteners		Substructure						
			Steelsheets S320GD ¹⁾ EN 10346				Timber		
			$t \geq$				OSB3 EN 300 $t \geq 18 \text{ mm}^2)$	Structural Timber EN 338/C24 $t \geq 22 \text{ mm}^3)$	Particle board EN 312/P5 $t \geq 19 \text{ mm}^4)$
Fastener	Plate		0,50 mm	0,63 mm	0,75 mm	1,00 mm			
1	IR2-4,8	IR-82x40	—	—	1,08	1,77	1,28	1,74	1,99
2	IR2-4,8	IF-70x70	—	—	1,08	1,77	1,28	1,74	1,99
3	IR2-S-4,8	IR-82x40	—	—	1,08	1,77	1,28	1,74	1,99
4	IR3-4,8	IR-82x40	—	—	—	1,36	—	—	—
5	IR3-S-4,8	IR-82x40	—	—	—	1,36	—	—	—
6	IR2-C-4,8	IRC/W-82x40	—	—	1,08	1,73	1,28	1,73	1,73
7	BS-4,8	RP45xL	—	—	1,08	1,23	1,23	1,23	1,23
8	BS-4,8	R45xL	—	—	1,08	1,38	1,28	1,38	1,38
9	BS-4,8	R75xL	—	—	1,08	1,38	1,28	1,38	1,38
10	BS-4,8	RP75xL	—	—	1,08	1,23	1,23	1,23	1,23
11	BS-4,8	TPSxL	—	—	1,08	1,38	1,28	1,38	1,38
12	BS-4,8	TPPxL	—	—	1,08	1,77	1,28	1,74	1,99
13	BS-4,8	R48xL-3N	—	—	1,08	1,38	1,28	1,38	1,38
14	BS-4,8	RP48xL-3N	—	—	1,08	1,23	1,23	1,23	1,23
15	BS-4,8	SH-18/65xL, Protan Steelbar	—	—	1,03	1,03	1,03	1,03	1,03
16	BS-S-4,8	RP45xL	—	—	1,08	1,23	1,23	1,23	1,23
17	BS-S-4,8	TPPxL	—	—	1,08	1,77	1,28	1,74	1,99
18	BS3-4,8	RP45xL	—	—	—	1,14	—	—	—
19	BS-6,1	RP45xL	—	1,13	—	1,23	—	—	—
20	BS-6,1	R45xL	—	1,13	—	1,38	1,21	1,38	1,29
72	BS-4,8	Sarnafast Tube SFT-50	—	—	1,08	1,66	1,28	1,66	1,66
73	BS-4,8	Sarnabar Tube SBT-20	—	—	1,08	1,77	1,28	1,74	1,89
74	BS-S-4,8	Sarnafast Tube SFT-50	—	—	1,08	1,66	1,28	1,66	1,66
75	BS-S-4,8	Sarnabar Tube SBT-20	—	—	1,08	1,66	1,28	1,66	1,66

¹⁾ for steelsheets S280GD, the values have to be reduced to 92 %

²⁾ effective embedment depth (penetration length of threaded part) $\geq 18\text{mm}$

³⁾ effective embedment depth (penetration length of threaded part) $\geq 22\text{mm}$

⁴⁾ effective embedment depth (penetration length of threaded part) $\geq 19\text{mm}$

SFS intec flat roof fasteners

Characteristic values of axial load resistance

Annex 159

Annex	SFS intec flat roof fasteners		Substructure						
			Steelsheets S320GD ¹⁾ EN 10346				Timber		
			$t \geq$				OSB3 EN 300 $t \geq 18 \text{ mm}^2)$	Structural Timber EN 338/C24 $t \geq 22 \text{ mm}^3)$	
	Fastener	Plate	0,50 mm	0,63 mm	0,75 mm	1,00 mm		Particle board EN 312/P5 $t \geq 19 \text{ mm}^4)$	
76	Sarnafast SF-4,8	Sarnafast KT-82x40	—	—	1,08	1,77	1,28	1,74	1,99
77	Sarnafast SF-4,8	Sarnafast DT-70x70	—	—	1,08	1,77	1,28	1,74	1,99
78	Sarnafast SBF-6,0	Sarnafast Tube SFT-50	—	—	1,34	1,66	1,32	1,66	1,18
79	Sarnafast SBF-6,0	Sarnabar Tube SBT-20	—	—	1,34	1,88	1,32	1,88	1,18
80	Sarnafast SB-6,3	Sarnafast KTL-82x40	—	—	1,36	2,01	1,31	1,49	1,34
88	IF2-6,1	IRD-82x40	—	1,11	—	1,16	1,07	2,04	1,35
89	IF2-6,1	ID-70x70	—	1,11	—	1,16	1,07	2,04	1,35
97	BS-4,8	FI-P-6,8	—	—	1,08	1,77	1,28	1,74	1,99
98	BS-S-4,8	FI-P-6,8	—	—	1,08	1,77	1,28	1,74	1,99
100	BS-6,1	FI-P-6,8	—	1,13	—	2,13	1,21	2,10	1,29
108	Sarnafast SBF-6,0	FI-P-6,8	—	—	1,34	2,09	1,32	2,16	1,18
109	Sarnafast SBF-S-6,0	FI-P-6,8	—	—	1,34	2,09	1,25	2,02	0,97
111	BS-4,8	FI-R-20, FI-P-16,0	—	—	1,08	1,55	1,28	1,55	1,55
112	BS-S-4,8	FI-R-20, FI-P-16,0	—	—	1,08	1,55	1,28	1,55	1,55
114	BS-6,1	FI-R-20, FI-P-16,0	—	1,13	—	1,71	1,21	1,71	1,29
118	Sarnafast SBF-6,0	FI-R-20, FI-P-16,0	—	—	1,34	1,71	1,32	1,71	1,18
119	Sarnafast SBF-S-6,0	FI-R-20, FI-P-16,0	—	—	1,34	1,71	1,25	1,71	0,97
122	IRF-4,8	IRF-40x40	—	—	1,30	1,35	—	—	—
123	IRF-4,8	IRF-64x64	—	—	1,30	1,35	—	—	—
124	IRF-4,8	IRF-82x40	—	—	1,30	1,35	—	—	—
125	IRF-4,8	IRF-40	—	—	1,30	1,35	—	—	—
131	Sarnafast SBF-6,0	SRT-L	—	—	1,34	1,42	1,32	1,42	1,18
132	Sarnafast SBF-S-6,0	SRT-L	—	—	1,34	1,42	1,25	1,42	0,97
134	Sarnafast SB-6,3	Sarnafast DTL-70x70	—	—	1,36	2,01	1,31	1,49	1,34

¹⁾ for steelsheets S280GD, the values have to be reduced to 92 %

²⁾ effective embedment depth (penetration length of threaded part) $\geq 18\text{mm}$

³⁾ effective embedment depth (penetration length of threaded part) $\geq 22\text{mm}$

⁴⁾ effective embedment depth (penetration length of threaded part) $\geq 19\text{mm}$

Annex	SFS intec flat roof fasteners		Substructure						
			Steelsheets S320GD ¹⁾ EN 10346				Timber		
			$t \geq$				OSB3 EN 300 $t \geq 18 \text{ mm}$ ²⁾	Structural Timber EN 338/C24 $t \geq 22 \text{ mm}$ ³⁾	
Fastener	Plate		0,50 mm	0,63 mm	0,75 mm	1,00 mm			
135	Sarnafast SB-6,3	IF/IG-C-82x40	—	—	1,36	2,01	1,31	1,49	1,34
136	Sarnafast SBF-6,0	Sarnafast KTL-82x40	—	—	1,36	2,09	1,32	2,16	1,18
137	Sarnafast SBF-6,0	Sarnafast DTL-70x70	—	—	1,34	2,09	1,32	2,16	1,18
138	Sarnafast SBF-6,0	IF/IG-C-82x40	—	—	1,34	2,09	1,32	2,16	1,18
139	Sarnafast SBF-S-6,0	Sarnafast KTL-82x40	—	—	1,34	2,09	1,25	2,02	0,97
140	Sarnafast SBF-S-6,0	Sarnafast DTL-70x70	—	—	1,34	2,09	1,25	2,02	0,97
141	Sarnafast SBF-S-6,0	IF/IG-C-82x40	—	—	1,34	2,09	1,25	2,02	0,97
142	Sarnafast SBF-S-6,0	Sarnafast SFT-50	—	—	1,34	1,66	1,25	1,66	0,97
143	Sarnafast SBF-S-6,0	Sarnabar Tube SBT-20	—	—	1,34	1,66	1,25	1,66	0,97
144	Sarnafast SBF-6,0	Sarnabar Tube SBT-20, SBIW-70x70	—	—	1,34	2,09	1,32	2,16	1,18
148	BS-4,8	ST-25	—	—	1,08	1,38	1,28	1,38	1,38
152	BS-4,8	NPPxL	—	—	1,08	1,77	1,28	1,74	1,99
153	BS-S-4,8	NPPxL	—	—	1,08	1,77	1,28	1,74	1,99
154	BS-4,8	NPSxL	—	—	1,08	1,38	1,28	1,74	1,99

¹⁾ for steelsheets S280GD, the values have to be reduced to 92 %
²⁾ effective embedment depth (penetration length of threaded part) $\geq 18\text{mm}$
³⁾ effective embedment depth (penetration length of threaded part) $\geq 22\text{mm}$
⁴⁾ effective embedment depth (penetration length of threaded part) $\geq 19\text{mm}$

Annex	SFS intec flat roof fasteners		Substructure					
			Steelsheets S320GD ¹⁾ EN 10346 $t \geq$				Perforated Steelsheets ²⁾ S320GD ¹⁾ $t \geq 0,75$ mm	Aluminiumsheets $R_m \geq 195$ N/mm $t \geq 0,6$ mm
	Fastener	Plate	0,50 mm	0,63 mm	0,75 mm	1,00 mm		
21	IFP2-6,7	IRP-82x40	—	—	—	—	0,87	—
22	BS-6,7	R45xL	—	—	—	—	0,87	—
23	BS-6,7	R75xL	—	—	—	—	0,87	—
24	BS-6,7	TPSxL	—	—	—	—	0,87	—
25	BS-S-6,7	R45xL	—	—	—	—	0,87	—
26	BS-S-6,7	R75xL	—	—	—	—	0,87	—
27	BS-S-6,7	TPSxL	—	—	—	—	0,87	—
28	TPR-L-6,3	IRD-82x40	0,88	—	—	1,36	—	0,58
29	TPR-L-6,3	IE-C-82x40	0,88	—	—	1,36	—	0,58
126	IRFP-6,3	IRFP-40x40	—	—	—	—	0,91	—
127	IRFP-6,3	IRFP-64x64	—	—	—	—	0,91	—
128	IRFP-6,3	IRFP-82x40	—	—	—	—	0,91	—
129	IRFP-6,3	IRFP-40	—	—	—	—	0,91	—
133	BS-6,7	SRT-L	—	—	—	—	0,87	—
150	TPR-L-6,3	IF/IG-C-82x40	0,88	—	—	1,20	—	0,58
155	BS-6,7	NPSxL	—	—	—	—	0,87	—
156	BS-S-6,7	NPSxL	—	—	—	—	0,87	—

¹⁾ for steelsheets S280GD, the values have to be reduced to 92 %
²⁾ triangular array of holes, hole diameter 5,0 mm, distance of holes 12,5 mm

Annex	SFS intec flat roof fasteners		Substructure		
			Timber		
	Fastener	Plate	OSB3 EN 300 $t \geq 18 \text{ mm}^3)$	Structural Timber EN 338/C24 $t \geq 22 \text{ mm}^4)$	Particle board EN 312/P5 $t \geq 19 \text{ mm}^5)$
30	IG-6,0	IRD-82x40	1,31	1,43	1,97
31	TS-T25-6,0	RP45xL	1,23	1,23	1,23
32	TS-T25-6,0	R45xL	1,31	1,38	1,38
33	IWF-5,2	MW-40-FH	1,39	1,07	1,39
34	IW-T-5,0	IRC/W-82x40	1,08	1,12	1,68
35	IW-S-5,0	IRC/W-82x40	1,08	1,12	1,68
90	TS-T25-6,0	R45xL	1,31	1,38	1,38
94	IW-S-5,0	IW-82x40	1,08	1,12	1,68
95	IW-T-5,0	IW-82x40	1,08	1,12	1,68
96	IWF-5,2	IW-82x40	1,07	1,39	1,39
107	TS-T25-6,0	FI-P-6,8	1,31	1,43	1,97
117	TS-T25-6,0	FI-R-20, FI-P 16,0	1,31	1,43	1,71

³⁾ effective embedment depth (penetration length of threaded part) $\geq 18\text{mm}$
⁴⁾ effective embedment depth (penetration length of threaded part) $\geq 22\text{mm}$
⁵⁾ effective embedment depth (penetration length of threaded part) $\geq 19\text{mm}$

English translation prepared by DIBt

Annex	SFS intec flat roof fasteners		Substructure			
			Concrete EN 206-1		embedment depth [mm]	drill hole diameter [mm]
	Fastener	Plate	C12/15	C25/30		
20	BS-6,1	R45xL	0,43	0,86	32,0	5,0
45	DT-4,8	IRD-82x40	2,40	2,56	25	4,8
46	DT-4,8	IF/IG-C-82x40	2,40	3,05	25,0	4,8
47	DT-4,8	IW-82x40	2,40	3,34	25	4,8
48	DT-4,8	R45xL	1,39	1,39	25	4,8
49	DT-4,8	TC-50-30	1,45	1,45	25	4,8
50	DT-S-4,8	IRD-82x40	2,56	2,56	25	4,8
51	DT-S-4,8	IF/IG-C-82x40	2,65	3,05	25,0	4,8
52	DT-S-4,8	R45xL	1,39	1,39	25	4,8
53	DT-S-4,8	TC-50-30	1,45	1,45	25	4,8
54	DT-6,3	IRD-82x40	2,93	3,68	32	6,3
55	DT-6,3	IF/IG-C-82x40	2,93	4,07	32,0	6,3
56	DT-6,3	TC-50-30	1,92	1,92	32	6,3
57	DT-S-6,3	IRD-82x40	2,23	3,10	32	6,3
58	DT-S-6,3	IF/IG-C-82x40	2,23	3,10	32,0	6,3
59	DT-S-6,3	TC-50-30	1,92	1,92	32	6,3
60	TI-6,3	IRD-82x40	1,83	1,83	20	5,0
			2,56	2,56	30	5,0
61	TI-6,3	IF/IG-C-82x40	1,83	2,73	20	5,0
			1,83	3,05	30	5,0
62	TI-6,3	ID-70x70	1,83	2,73	20	5,0
			1,83	3,79	30	5,0
63	TI-T25-6,3	R75xL	1,42	1,42	20	5,0
			1,42	1,42	30	5,0
64	TI-T25-6,3	TPSxL	1,42	1,42	20	5,0
			1,42	1,42	30	5,0

SFS intec flat roof fasteners	Annex 164
Characteristic values of axial load resistance	

Annex	SFS intec flat roof fasteners		Substructure		
			Concrete EN 206-1		embedment depth [mm]
	Fastener	Plate	C12/15	C25/30	
65	TI-T25-6,3	R48xL-3N	1,42	1,42	20
			1,42	1,42	30
66	TI-T25-6,3	R45xL	1,42	1,42	20
			1,42	1,42	30
67	TI-S-T25-6,1	R45xL	1,42	1,42	20
68	TIA-T25-6,3	R45xL	1,42	1,42	20
69	IE-6,3	IRD-82x40	0,52	0,73	25 ¹⁾
			0,80	1,13	35
70	IE-6,3	IE-C-82x40	0,52	0,73	25 ¹⁾
			0,80	1,13	35
71	IE-6,3	TC-50-30	0,52	0,73	25 ¹⁾
			0,80	1,13	35
81	TI-6,3	Sarnafast DTL -70x70	1,83	1,83	20
			2,56	2,56	30
82	TI-T25-6,3	Sarnafast Tube SFT-50	1,66	1,66	20
			1,66	1,66	30
83	TI-T25-6,3	Sarnabar Tube SBT-20	1,66	1,66	20
			1,66	1,66	30
84	TI-S-T25-6,1	Sarnafast Tube SFT-50	1,66	1,66	20
85	TI-S-T25-6,1	Sarnabar Tube SBT-20	1,66	1,66	20

¹⁾ Minimum thickness of the concrete component $h \geq 25$ mm

SFS intec flat roof fasteners	Annex 165
Characteristic values of axial load resistance	

English translation prepared by DIBt

Annex	SFS intec flat roof fasteners		Substructure			
			Concrete EN 206-1		embedment depth [mm]	Vorbohr diameter [mm]
	Fastener	Plate	C12/15	C25/30		
20	BS-6,1	R45xL	0,43	0,86	32,0	5,0
78	Sarnafast SBF -6,0	Sarnafast Tube SFT-50	0,72	1,45	32,0	5,0
79	Sarnafast SBF -6,0	Sarnabar Tube SBT-20	0,72	1,45	32,0	5,0
86	TI-S-Z10-6,3	R45xL	0,53	1,05	32,0	5,0
87	TI-S-Z10-6,3	R75xL	0,53	1,05	32,0	5,0
88	IF2-6,1	IRD-82x40	1,56	2,56	32,0	5,0
89	IF2-6,1	ID-70x70	1,56	3,12	32,0	5,0
90	TS-T25-6,0	R45xL	0,44	0,89	32,0	5,0
99	TI-T25-6,3	FI-P-6,8	1,83	2,73 / 2,86	20,0 / 30,0	5,0
100	BS-6,1	FI-P-6,8	0,43	0,86	32,0	5,0
101	DT-4,8	FI-P-6,8	2,40	2,83	25,0	4,8
102	DT-S-4,8	FI-P-6,8	2,65	2,83	25,0	4,8
103	DT-6,3	FI-P-6,8	2,93	3,82	32,0	6,3
104	DT-S-6,3	FI-P-6,8	2,23	3,10	32,0	6,3
107	TS-T25-6,0	FI-P-6,8	0,44	0,89	32,0	5,0
108	Sarnafast SBF -6,0	FI-P-6,8	0,72	1,45	32,0	5,0
109	Sarnafast SBF -S-6,0	FI-P-6,8	0,42	0,84	32,0	5,0
113	TI-T25-6,3	FI-R-20, FI-P- 16,0	1,71	1,71	20,0	5,0
114	BS-6,1	FI-R-20, FI-P- 16,0	0,43	0,86	32,0	5,0
115	DT-4,8	FI-R-20, FI-P- 16,0	1,71	1,71	25,0	4,8
116	DT-S-4,8	FI-R-20, FI-P- 16,0	1,71	1,71	25,0	4,8
SFS intec flat roof fasteners					Annex 166	
Characteristic values of axial load resistance						

English translation prepared by DIBt

Annex	SFS intec flat roof fasteners		Substructure			
			Concrete EN 206-1		embedment depth [mm]	Vorbohr diameter [mm]
	Fastener	Plate	C12/15	C25/30		
117	TS-T25-6,0	FI-R-20, FI-P-16,0	0,44	0,89	32,0	5,0
118	Sarnafast SBF-6,0	FI-R-20, FI-P-16,0	0,72	1,45	32,0	5,0
119	Sarnafast SBF-S-6,0	FI-R-20, FI-P-16,0	0,42	0,84	32,0	5,0
120	TIA-T25-6,3	FI-R-20, FI-P-16,0	1,68	1,68	20,0	5,0
121	TIA-T25-6,3	FI-R-20, Sarnabar	1,68	1,68	20,0	5,0
130	TI-T25-6,3	SRT-L	1,42	1,42	20,0	5,0
131	Sarnafast SBF-6,0	SRT-L	0,72	1,42	32,0	5,0
132	Sarnafast SBF-S-6,0	SRT-L	0,42	0,84	32,0	5,0
136	Sarnafast SBF-6,0	Sarnafast KTL-82x40	0,72	1,45	32,0	5,0
137	Sarnafast SBF-6,0	Sarnafast DTL-70x70	0,72	1,45	32,0	5,0
138	Sarnafast SBF-6,0	IF/IG-C-82x40	0,72	1,45	32,0	5,0
139	Sarnafast SBF-S-6,0	Sarnafast KTL-82x40	0,42	0,84	32,0	5,0
140	Sarnafast SBF-S-6,0	Sarnafast DTL-70x70	0,42	0,84	32,0	5,0
141	Sarnafast SBF-S-6,0	IF/IG-C-82x40	0,42	0,84	32,0	5,0
142	Sarnafast SBF-S-6,0	Sarnafast Tube SFT-50	0,42	0,84	32,0	5,0
143	Sarnafast SBF-S-6,0	Sarnabar Tube SBT-20	0,42	0,84	32,0	5,0
144	Sarnafast SBF-6,0	Sarnabar Tube SBT-20, SBIW-70x70	0,72	1,45	32,0	5,0
145	TIF-N-6,3	RH45xL	1,54	1,54	20,0	5,0
146	TIA-T25-6,3	R75xL	1,42	1,42	20,0	5,0
147	TIA-T25-6,3	ST-25	1,42	1,42	20,0	5,0
149	TI-T25-6,3	ST-25	1,42	1,42	20,0	5,0
157	TI-T25-6,3	NPSxL	1,42	1,42	20,0	5,0
158	TIA-T25-6,3	Sarnabar Tube SBT-20	1,83	1,83	20,0	5,0

SFS intec flat roof fasteners	Annex 167
Characteristic values of axial load resistance	

English translation prepared by DIBt

Annex	SFS intec flat roof fasteners		Substructure				
			Pumice panel EN 1520 LAC 6, D 1,0	Aerated Concrete DIN 4223-1		embedment depth [mm]	drill hole diameter [mm]
	Fastener	Plate		P3,3 density 0,45	P4,4 density 0,55		
20	BS-6,1	R45xL	—	0,92	1,38	75,0	—
36	LBS-S-T25-8,0	IE-C-82x40	—	0,93	1,44	60	—
37	LBS-S-T25-8,0	R45xL	—	0,93	1,43	60	—
38	LBS-S-T25-8,0	TC-50-30	—	0,93	1,44	60	—
39	IGR-T-T25-8,0	IG8-C-82x40	—	0,93	1,44	60	—
40	LBS-T25-8,0	MW-40-LBS	—	0,93	1,44	60	—
41	LBS-T25-8,0	R45xL	—	0,93	1,43	60	—
42	LB-45		—	1,44	1,44	65	15
43	FB-S-T25-7,5	IE-C-82x40	0,59	—	—	17	4,8
44	FB-S-T25-7,5	R45xL	0,59	—	—	17	4,8
78	Sarnafast SBF-6,0	Sarnafast Tube SFT-50	—	0,35	0,58	75,0	—
79	Sarnafast SBF-6,0	Sarnabar Tube SBT-20	—	0,35	0,58	75,0	—
88	IF2-6,1	IRD-82x40	—	1,27	2,11	75,0	—
89	IF2-6,1	ID-70x70	—	1,27	2,11	75,0	—
90	TS-T25-6,0	R45xL	—	1,07	1,38	75,0	—
91	FB-S-T25-7,5	IRD-82x40	0,59	—	—	17,0	4,8
92	FB-S-T25-7,5	IF/IG-C-82x40	0,59	—	—	17,0	4,8
93	FB-S-T25-7,5	R75xL	0,59	—	—	17,0	4,8
100	BS-6,1	FI-P-6,8	—	0,92	1,53	75,0	—
105	LBS-T25-8,0	FI-P-6,8	—	0,93	1,44	60,0	—
106	LBS-S-T25-8,0	FI-P-6,8	—	0,93	1,44	60,0	—
107	TS-T25-6,0	FI-P-6,8	—	1,07	1,78	75,0	—
108	Sarnafast SBF-6,0	FI-P-6,8	—	0,35	0,58	75,0	—
109	Sarnafast SBF-S-6,0	FI-P-6,8	—	0,82	1,37	75,0	—
110	FB-S-T25-7,5	FI-P-6,8	0,59	—	—	17,0	4,8
<hr/> SFS intec flat roof fasteners							
Characteristic values of axial load resistance							
Annex 168							

Annex	SFS intec flat roof fasteners		Substructure			
			Pumice panel EN 1520 LAC 6, D 1,0	Aerated Concrete DIN 4223-1		embedment depth [mm]
	Fastener	Plate		P3,3 density 0,45	P4,4 density 0,55	
114	BS-6,1	FI-R-20xL, FI-P-16,0	—	0,92	1,53	75,0
117	TS-T25-6,0	FI-R-20xL, FI-P-16,0	—	1,07	1,71	75,0
118	Sarnafast SBF -6,0	FI-R-20xL, FI-P-16,0	—	0,35	0,58	75,0
119	Sarnafast SBF -S-6,0	FI-R-20xL, FI-P-16,0	—	0,82	1,37	75,0
131	Sarnafast SBF -6,0	SRT-L	—	0,35	0,58	75,0
132	Sarnafast SBF -S-6,0	SRT-L	—	0,82	1,37	75,0
136	Sarnafast SBF -6,0	Sarnafast KTL -82x40	—	0,35	0,58	75,0
137	Sarnafast SBF -6,0	Sarnafast DTL -70x70	—	0,35	0,58	75,0
138	Sarnafast SBF -6,0	IF/IG-C-82x40	—	0,35	0,58	75,0
139	Sarnafast SBF -S-6,0	Sarnafast KTL -82x40	—	0,82	1,37	75,0
140	Sarnafast SBF -S-6,0	Sarnafast DTL -70x70	—	0,82	1,37	75,0
141	Sarnafast SBF -S-6,0	IF/IG-C-82x40	—	0,82	1,37	75,0
142	Sarnafast SBF -S-6,0	Sarnafast Tube SFT-50	—	0,82	1,37	75,0
143	Sarnafast SBF -S-6,0	Sarnabar Tube SBT-20	—	0,82	1,37	75,0
144	Sarnafast SBF -6,0	Sarnabar Tube SBT -20, SBIW-70x70	—	0,35	0,58	75,0
151	LBS-S-T25-8,0	IF/IG-C-82x40	—	0,93	1,44	60,0

SFS intec flat roof fasteners	Annex 169
Characteristic values of axial load resistance	