

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-12/0383
of 22 August 2017

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Capatect WDVS "B"
mit Unterputz Klebe- und Armierungsmasse 186 M

Product family
to which the construction product belongs

Product area code: 4
External Thermal Insulation Composite System with
rendering on expanded polystyrene for the use as
external insulation of building walls

Manufacturer

CAPAROL
Farben Lacke Bautenschutz GmbH
Roßdörfer Straße 50
64372 Ober-Ramstadt
DEUTSCHLAND

Manufacturing plant

Caparol Farben Lacke Bautenschutz GmbH
Roßdörfer Straße 50
64372 Ober-Ramstadt
DEUTSCHLAND

This European Technical Assessment
contains

19 pages including 4 annexes which form an integral part
of this assessment

Annex 5 Control Plan contains confidential information
and is not included in the European Technical
Assessment when that assessment is publicly available

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Guideline for European technical approval of "External
Thermal Insulation Composite Systems with Rendering",
ETAG 004, edition 2000, amended 2013,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

This version replaces

ETA-12/0383 issued on 8 October 2012

European Technical Assessment

ETA-12/0383

English translation prepared by DIBt

Page 2 of 19 | 22 August 2017

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

1.1 Definition of the kit

This product is an External Thermal Insulation Composite System (ETICS) with rendering - a kit comprising components which are factory-produced by the manufacturer or component suppliers. It's made up on site from these. The ETICS manufacturer is ultimately responsible for all components of the ETICS specified in this ETA.

The ETICS kit comprises a prefabricated insulation product of expanded polystyrene (EPS) to be bonded and if it necessary additionally mechanically fixed onto a wall. The methods of fixing and the relevant components are specified in the table below.

The insulation product is faced with a rendering system consisting of one base coat and key coat (site applied), in which the base coat contains reinforcement. The rendering is applied directly to the insulating panels, without any air gap or disconnecting layer.

The ETICS may include special fittings (e.g. base profiles, corner profiles ...) for connection to adjacent building elements (apertures, corners, parapets...). Assessment and performance of these components is not addressed in this ETA, however the ETICS manufacturer is responsible for adequate compatibility and performance within the ETICS when the components are delivered as a part of the kit.

1.2 Composition of the ETICS

	Components National application documents shall be taken into account	Coverage [kg/m ²]	Thickness [mm]
Insulation material with associated method of fixing	Bonded ETICS:		
	• Insulation product (see annex 1 for product characteristics) factory-prefabricated expanded polystyrene (EPS)		
	– standard EPS	–	≤ 400
	– elastified EPS	–	≤ 200
	• Adhesives		
	– Capatect-Klebe- und Armierungsmasse 186 M (cement based powder requiring addition of about 25 % of water)	3.0 to 5.0 (powder)	–
	– Capatect-Klebe- und Spachtelmasse 190 (cement based powder requiring addition of about 22 % of water)	3.0 to 5.0 (powder)	–
	– Capatect-Klebe- und Armierungsmasse 133 Leicht (cement based powder requiring addition of about 37 % of water)	3.0 to 3.5 (powder)	–
	– Capatect-Dämmkleber 185 (cement based powder requiring addition of about 20 % of water)	4.0 to 5.0 (powder)	–
	– Capatect ArmaReno 700 (cement based powder requiring addition of about 25 % of water)	3.5 to 5.0 (powder)	–
	– Capatect-ZF-Spachtel 699 (organic based ready to use paste)	2.0 to 4.0 (prepared)	–

	Components National application documents shall be taken into account	Coverage [kg/m ²]	Thickness [mm]
Insulation material with associated method of fixing	Mechanically fixed ETICS with profiles and supplementary adhesive: <ul style="list-style-type: none"> • Insulation product (see annex 1 for product characteristics) factory-prefabricated expanded polystyrene (EPS) <ul style="list-style-type: none"> – standard EPS • Supplementary adhesive (equal to bonded ETICS) • Profiles (see annex 3 for product characteristics) <ul style="list-style-type: none"> – Halteleiste PVC – Verbindungsleiste PVC Polyvinyl chloride (PVC) profiles • Anchors for profiles (see annex 2 for product characteristics) <ul style="list-style-type: none"> – WS 8 L – WS 8 N – ejotherm SDK U – SDF-K plus – ejotherm NK U 	–	60 to 200
	Mechanically fixed ETICS with anchors and supplementary adhesive: <ul style="list-style-type: none"> • Insulation product (see annex 1 for product characteristics) factory-prefabricated expanded polystyrene (EPS) <ul style="list-style-type: none"> – standard EPS – elastified EPS • Supplementary adhesive (equal to bonded ETICS) • Anchors for insulation product (see annex 2 for product characteristics) <ul style="list-style-type: none"> – Hilti ETICS screwed-in anchor D 8-FV and anchors with ETA according to EAD 330196-00-0604¹ with characteristics defined in annex 2 	– –	60 to 400 60 to 200

¹

EAD 330196-00-0604

Plastic anchors for fixing of external thermal insulation composite systems with rendering

	Components National application documents shall be taken into account	Coverage [kg/m ²]	Thickness [mm]
Base coat	Capatect-Klebe- und Armierungsmasse 186 M Identical with the equally named adhesive given above.	4.0 to 5.0	3.0 to 4.0
Glass fibre mesh	Capatect-Gewebe 650 Alkali- and slide-resistant glass fibre mesh with mass per unit area of about 160 g/m ² and mesh size of about 4.0 mm x 4.0 mm. (see annex 4 for product characteristics)	–	–
	Capatect-Panzergebebe 652 (implemented in addition to the standard mesh to improve the impact resistance) Alkali- and slide-resistant glass fibre mesh with mass per unit area of about 330 g/m ² and mesh size of about 6.0 mm x 6.0 mm. (see annex 4 for product characteristics)	–	–
Key coat	Putzgrund 610 Ready to use pigmented liquid – styrol acrylate binder. For the compatibility with the finishing coats see below.	ca. 0.20 l/m ²	–
Finishing coat	To use with key coat "Putzgrund 610":* <ul style="list-style-type: none"> Ready to use pastes – acrylate binder: <ul style="list-style-type: none"> Capatect-Fassadenputz R (particle size 1.5 to 3.0 mm) Capatect-Fassadenputz K (particle size 1.5 to 3.0 mm) Ready to use pastes – acrylate/silicone resin emulsion: <ul style="list-style-type: none"> AmphiSilan-Fassadenputz NQG R (particle size 2.0 to 3.0 mm) AmphiSilan-Fassadenputz NQG K (particle size 1.5 to 3.0 mm) Ready to use paste – vinyl acetate ethylene binder: <ul style="list-style-type: none"> Capatect-Fassadenputz fein 	2.8 to 3.6 2.7 to 4.3 2.5 to 3.5 2.5 to 4.1 3.0 to 4.5	} regulated by particle size 2.0 to 3.0
	To use with key coat "Putzgrund 610", if applicable:* <ul style="list-style-type: none"> Ready to use pastes – silicate/styrol acrylate binder: <ul style="list-style-type: none"> Sylitol-Fassadenputz R (particle size 2.0 to 3.0 mm) Sylitol-Fassadenputz K (particle size 1.5 to 3.0 mm) 	2.5 to 4.0 2.5 to 4.0	} regulated by particle size

	Components National application documents shall be taken into account	Coverage [kg/m²]	Thickness [mm]
Finishing coat	<ul style="list-style-type: none">• Cement based powder requiring addition of about 28 – 44 % of water: Capatect-Mineral-Leichtputz R (particle size 2.0 to 3.0 mm) Capatect-Mineral-Leichtputz K (particle size 2.0 to 3.0 mm)• Cement based powder requiring addition of about 20 – 24 % of water Capatect-Mineralputz R (particle size 2.0 to 3.0 mm) Capatect-Mineralputz K (particle size 2.0 to 3.0 mm)• Cement based powder requiring addition of about 20 – 24 % of water: Capatect-Feinspachtel 195• Cement based powder requiring addition of about 40 % of water: Capatect-Modellier- und Spachtelputz 134• Ready to use pastes – styrol acrylate binder – associated with synthetic briquettes: Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	<div>2.3 to 4.5</div> <div>2.3 to 4.5</div> <div>about 3.0</div> <div>about 3.0</div> <div>4.0 to 6.0</div> <div>about 4.0</div> <div>4.0 to 5.0</div> <div>3.0 to 4.0</div>	<div></div> <div></div> <div>regulated by particle size</div> <div>2.0 to 3.0</div> <div>2.0 to 5.0</div> <div>6.0</div> <div>1.0 to 4.0</div>
Ancillary material	Remain under the manufacturer's responsibility.		
* The instruction to the installer concerning the use of a key coat remains the responsibility of the manufacturer.			

2. Specification of the intended use in accordance with the applicable European assessment Document (hereinafter called EAD)

2.1 Intended use

This ETICS is intended to be used as external insulation to the walls of buildings made of masonry (bricks, blocks, stones ...) or concrete (cast on site or as prefabricated panels) with and without rendering. The characteristics of the walls shall be verified prior to use of the ETICS, especially regarding conditions for reaction to fire classification and for fixing of the ETICS either by bonding or mechanically. It shall be designed to give the wall to which it is applied satisfactory thermal insulation.

The ETICS is non load-bearing construction element. It does not contribute directly to the stability of the wall on which it is installed, but it can contribute to durability by providing enhanced protection from the effects of weathering.

The ETICS can be used on new or existing (retrofit) vertical walls.

The ETICS is not intended to ensure the air tightness of the building structure.

The choice of the method of fixing depends on the characteristics of the substrate, which could need preparation (see clause 7.2.1 of ETAG 004) and on the national instructions

The verifications and assessment methods on which this European Technical Assessment (hereinafter called ETA) is based lead to the assumption of a working life of the ETICS

"Capatect WDVS "B" mit Unterputz Capatect-Klebe- und Armierungsmasse 186 M" of at least 25 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the assumed economically reasonable working life of the works

2.2 Manufacturing

The ETA is issued for the ETICS on the basis of agreed data/information, deposited with the DIBt, which identifies the ETICS that has been assessed and judged. Changes to the ETICS or the components or their production process, which could result in this deposited data/information being incorrect, should be notified to the DIBt before the changes are introduced. The DIBt will decide whether such changes affect the approval and consequently the validity of the CE marking on the basis of the approval and if so whether further assessment or alterations to the approval shall be necessary.

2.3 Design and installation

The installation instructions including special installation techniques and provisions for the qualification of the personnel are given in the manufacturer's technical documentation.

Design, installation and execution of ETICS are to be in conformity with national documents. Such documents and the level of their implementation in Member States' legislation are different. Therefore, the assessment and declaration of performance are done taking into account general assumptions introduced in the chapters 7.1 and 7.2 of ETAG 004 used as EAD, which summarize how information introduced in the ETA and related documents is intended to be used in the construction process and gives advice to all parties interested when normative documents are missing.

2.4 Packing, transport and storage

The information on packaging, transport and storage is given in the manufacturer's technical documentation. It is the responsibility of the manufacturer to ensure that this information is made know to the concerned people.

2.5 Use, maintenance, repair

The finishing coat shall normally be maintained in order to fully preserve the ETICS performance. Maintenance includes at least:

- visual inspection of the ETICS,
- the repairing of localized damaged areas due to accidents,
- the aspect maintenance with products adapted and compatible with the ETICS (possibly after washing or ad hoc preparation).

Only products which are compatible with the ETICS shall be used.

Necessary repairs should be performed as soon as the need has been identified.

The information on use, maintenance and repair is given in the manufacturer's technical documentation.

It is the responsibility of the manufacturer to ensure that this information is made know to the concerned people.

3 Characteristics of products and methods of verification

3.0 General

The performances of the kit as described in this chapter are valid provided that the components of the kit comply with Annexes 1 to 4.

3.1 Mechanical resistance and stability (BWR 1)

not relevant

3.2 Safety in case of fire (BWR 2)

Reaction to fire (ETAG 004 - clause 5.1.2)

Configurations	Organic content	Flame retardant content	Euroclass according to EN 13501-1
Base coat	max. 2.3 %	no flame retardant	
EPS- insulation product	In quantity ensuring Euroclass E according to EN 13501-1	In quantity ensuring Euroclass E according to EN 13501-1	
Profile	-	-	
Anchor	-	-	
Rendering system: Base coat with finishing coat and compatible key coat indicated hereafter:			
Capatect-Mineral-Leichtputz R, Capatect-Mineral-Leichtputz K, Capatect-Mineralputz R, Capatect-Mineralputz K, Capatect-Feinspachtel 195, Capatect-Modellier- und Spachtelputz 134	max. 3.7%	no flame retardant	B – s1,d0
Sylitol-Fassadenputz R, Sylitol-Fassadenputz K	max. 5.5%	no flame retardant	B - s2,d0
Capatect-Fassadenputz R, Capatect-Fassadenputz K, AmphiSilan-Fassadenputz NQG R, AmphiSilan-Fassadenputz NQG K, Capatect-Fassadenputz fein,	max. 8.9 %	min. 3.0 %	
Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	max. 8.5% max. 9.5 %	min. 5.2 % min. 10.0 %	

3.3 Hygiene, health and environment (BWR 3)

3.3.1 Water absorption (capillarity test) (ETAG 004 - clause 5.1.3.1)

Base coat:

- Water absorption after 1 h < 1.0 kg/m²
- Water absorption after 24 h < 0.5 kg/m²

• **Rendering system:**

		Water absorption after 24 hours	
		< 0.5 kg/m ²	< 0.5 kg/m ²
Rendering system: Base coat with finishing coat indicated hereafter:	Capatect-Fassadenputz R, K	x	
	AmphiSilan-Fassadenputz NQG R, K	x	
	Capatect-Fassadenputz fein	x	
	Sylitol-Fassadenputz R, K	x	
	Capatect-Mineral-Leichtputz R, K	x	
	Capatec-Mineralputz R, K	x	
	Capatect-Feinspachtel 195	x	
	Capatect Modellier- und Spachtelputz 134	x	
	Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	x	

3.3.2 Hydrothermal behaviour (ETAG 004 - clause 5.1.3.2)

Pass (without defects)

3.3.3 Impact resistance (ETAG 004 - clause 5.1.3.3)

Rendering system: Base coat with finishing coat indicated hereafter	Single standard mesh " Capatect-Gewebe 650"	
	Capatect-Klebe- und Armierungsmasse 186 M	
	t = 3 mm	t = 4 mm
Capatect-Fassadenputz R, K	Category II	Category II
AmphiSilan-Fassadenputz NQG R, K		
Capatect-Fassadenputz fein	Category III	Category III
Sylitol-Fassadenputz R, K	Category II	Category II
Capatect-Mineral-Leichtputz R, K		
Capatec-Mineralputz R, K		
Capatect-Feinspachtel 195		
Capatect Modellier- und Spachtelputz 134		not applicable
Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	Category I	Category I

The impact resistance for base coat and finishing coats with the combination of "Capatect-Gewebe 650" and "Capatect-Panzergewebe 652" were unproved.

3.3.4 Water vapour permeability (ETAG 004 - clause 5.1.3.4)

Rendering system: Base coat with finishing coat indicated hereafter (evaluated without decorative coating or key coat)	Equivalent air thickness s_d
Capatect-Fassadenputz R, K	≤ 1.0 m (Test result obtained with a layer thickness 3 mm: 0.35 m)
AmphiSilan-Fassadenputz NQG R, K	≤ 1.0 m (Test result obtained with a layer thickness 3 mm: 0.20 m)
Capatect-Fassadenputz fein	≤ 1.0 m (Test result obtained with a layer thickness 4 mm: 0.40 m)
Sylitol-Fassadenputz R, K	≤ 1.0 m (Test result obtained with a layer thickness 3 mm: 0.15 m)
Capatect-Mineral-Leichtputz R, K	≤ 1.0 m (Test result obtained with a layer thickness 3 mm: 0.10 m)
Capatec-Mineralputz R, K	≤ 1.0 m (Test result obtained with a layer thickness 3 mm: 0.06 m)
Capatect-Feinspachtel 195	≤ 1.0 m (Test result obtained with a layer thickness 4 mm: 0.10 m)
Capatect Modellier- und Spachtelputz 134	≤ 1.0 m (Test result obtained with a layer thickness 4 mm: 0.,10 m)
Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	≤ 1.0 m (Test result: 0.,70 m)

3.3.5 Release of dangerous substances (ETAG 004 - clause 5.1.3.5, EOTA TR 034)

Essential characteristic	Performance
Release of dangerous substances	no performance assessed

3.4 Safety and accessibility in use (BWR 4)

3.4.1 Bond strength between base coat and insulation product (EPS) (ETAG 004 - clause 5.1.4.1.1)

Conditioning		
Initial state	After hygrothermal cycles	After freeze/thaw test
≥ 0.08 MPa	≥ 0.08 MPa	Test not required because freeze/thaw cycles not necessary

3.4.2 Bond strength between adhesive and substrate resp. insulation product (EPS) (ETAG 004 - clauses 5.1.4.1.2 and 5.1.4.1.3)

Adhesive	Substrate resp. insulation product	Conditioning		
		Initial state	2 d immersion in water and 2 h drying	2 d immersion in water and 7 d drying
Capatect-Klebe- und Armierungsmasse 186 M	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa

Adhesive	Substrate resp. insulation product	Conditioning		
		Initial state	2 d immersion in water and 2 h drying	2 d immersion in water and 7 d drying
Capatect-Klebe- und Spachtelmasse 190	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa
Capatect-Klebe- und Armierungsmasse 133 Leicht	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa
Capatect-Dämmkleber 185	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa
Capatect ArmaReno 700	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa
Capatect-ZF-Spachtel 699	Concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	Aerated concrete	≥ 0.25 MPa	≥ 0.08 MPa	≥ 0.25 MPa
	EPS	≥ 0.08 MPa	≥ 0.03 MPa	≥ 0.08 MPa

Bonded surface:

For bonded ETICS the calculated minimal bonded surface area, according to ETAG 004, clause 6.1.4.1.3 is 40 %.

3.4.3 Bond strength after ageing (ETAG 004 - clause 5.1.7.1)

Rendering system: Base coat with finishing coat indicated hereafter	Capatect-Fassadenputz R, K	≥ 0.08 MPa
	AmphiSilan-Fassadenputz NQG R, K	
	Capatect-Fassadenputz fein	
	Sylitol-Fassadenputz R, K	
	Capatect-Mineral-Leichtputz R, K	
	Capatect-Mineralputz R, K	
	Capatect-Feinspachtel 195	
	Capatect Modellier- und Spachtelputz 134	
	Meldorfer Flachverblender mit Meldorfer Ansatzmörtel	

3.4.4 Fixing strength (displacement test) (ETAG 004 - clause 5.1.4.2)

Test not required, therefore no limitation of ETICS length required

3.4.5 Wind load resistance (ETAG 004 - clause 5.1.4.3)

The following failure loads only apply to the listed combination and the characteristics of the insulation product given in annex 1.

3.4.5.1 Safety in use of mechanically fixed ETICS using profiles

Characteristics of the EPS (standard EPS)	Dimensions	500 mm x 500 mm
	Thickness	≥ 60 mm
	Tensile strength perpendicular to the faces	≥ 150 kPa
	Shear modulus	≥ 1.0 N/mm ²
Failure loads [N/panel] (Static Foam Block Test)	Horizontal profiles fixed every 30 cm and 49.4 cm long vertical connection profiles	Minimal: 950 Average: 1010

3.4.5.2 Safety in use of mechanically fixed ETICS using anchors

Apply to all anchors listed in the clause 1.2 mounted on the insulation panels surface				
Characteristics of the EPS (standard EPS)	Thickness		≥ 60 mm	
	Tensile strength perpendicular to the faces		≥ 100 kPa	
	Shear modulus		≥ 1.0 N/mm²	
Plate diameter of anchor			Ø 60 mm	Ø 90 mm
Failure loads [N]	Anchors not placed at the panel joints (Static Foam Block Test)	R _{panel}	Minimal: 510 Average: 520	Minimal: 720 Average: 730
	Anchors placed at the panel joints (Pull-through test)	R _{joint}	Minimal : 400 Average: 430	Minimal: 430 Average: 470

Apply to all anchors listed in the clause 1.2 mounted on the insulation panels surface				
Characteristics of the EPS (elastified EPS)	Thickness		≥ 60 mm	
	Tensile strength perpendicular to the faces		≥ 80 kPa	
	Shear modulus		≥ 0.3 N/mm²	
Plate diameter of anchor			Ø 60 mm	
Failure loads [N]	Anchors not placed at the panel joints (Static Foam Block Test)	R _{panel}	Minimal:	350
			Average:	360
	Anchors placed at the panel joints (Pull-through test)	R _{joint}	Minimal:	300
			Average:	310

The failure loads specified above for a plate diameter of anchor of 60 mm apply to the following anchors with deep mounting but only on the following conditions of installation:

Anchor	Thickness of the EPS [d]	Conditions of installation*
ejotherm STR U, ejotherm STR U 2G (ETA-04/0023)	100 mm > d ≥ 80 mm (for standard and elastified EPS)	– Maximum installation depth of the anchor plate: 15 mm (△ thickness of insulation cover) – Maximum depth of die: 5 mm
	≥ 100 mm (for standard and elastified EPS)	– Maximum installation depth of the anchor plate: 15 mm (△ thickness of insulation cover) – Maximum depth of die: 20 mm

Anchor	Thickness of the EPS [d]	Conditions of installation*
TERMOZ 8 SV (ETA-06/0180)	≥ 80 mm (for standard EPS only)	– Maximum installation depth of the anchor plate: 15 mm (\triangle thickness of insulation cover)
Hilti ETICS screwed-in anchor D 8-FV (ETA-07/0288)	≥ 100 mm (for standard and elastified EPS)	– Minimum thickness of fixture in the insulation panel: $t_{fix} = 80$ mm; only setting tools according to ETA-07/0288 are to be used.
* according to the appropriate ETA of anchor		

3.4.6 Render strip tensile test (ETAG 004 - clause 5.5.4.1)

The average value of crack width of the base coat reinforced with the glass fibre mesh "Capatect-Gewebe 650" measured at a render strain value of 1 % is about 0.06 mm.

3.5 Protection against noise (BWR 5)

For the protection against noise no performance was assessed for this product.

3.6 Energy economy and heat retention (BWR 6)

3.6.1 Thermal resistance

The nominal value of the additional thermal resistance R provided by the ETICS to the substrate wall is calculated in accordance with EN ISO 6946:2007 from the nominal value of the insulation product's thermal resistance R_D given accompanied to the CE marking and from the thermal resistance of the rendering system R_{render} which is about $0.02 \text{ (m}^2 \cdot \text{K)/W}$.

$$R = R_D + R_{render}$$

The thermal bridges caused by anchors profiles increases the thermal transmittance U . This influence had to take into account according to EN ISO 6946:2007

$$U_c = U + \chi_p \cdot n$$

Where: U_c corrected thermal transmittance [$\text{W}/(\text{m}^2 \cdot \text{K})$]

n : number of anchors per m^2

χ_p : local influence of thermal bridge caused by an anchor. The values listed below can be taken into account if not specified in the anchor's ETA:

$\chi_p = 0.004 \text{ W/K}$ for anchors with a galvanized steel screw with the head covered by a plastic material

$\chi_p = 0.002 \text{ W/K}$ for anchors with a stainless steel screw covered by plastic anchors and for anchors with an air gap at the head of the screw

The thermal bridges caused by profiles are negligible.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to the European Commission decision 97/556/EC amended by the European Commission decision 2001/596/EC, the Assessment and verification of constancy of performance system (AVCP) applies suitable following table (see Annex V to Regulation (EU) No 305/2011).

Product	Intended use	Levels or classes (Reaction to fire)	Systems
Capatect WDVS "B" mit Unterputz Capatect-Klebe- und Armierungs- masse 186 M	in external wall subject to fire regulations	A1 ⁽¹⁾ , A2 ⁽¹⁾ , B ⁽¹⁾ , C ⁽¹⁾	1
		A1 ⁽²⁾ , A2 ⁽²⁾ , B ⁽²⁾ , C ⁽²⁾ , D, E, (A1 to E) ⁽³⁾ , F	2+
	in external wall not subject to fire regulations	any	2+
⁽¹⁾ Products/materials for which a clearly identifiable stage in the production process results in an improvement of the reaction to fire classification (e.g. an addition of fire retardants or a limiting of organic material) ⁽²⁾ Products/materials not covered by footnote (1) ⁽³⁾ Products/materials that do not require to be tested for reaction to fire (e.g. products/materials of Classes A1 according to Commission Decision 96/603/EC)			

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 22 August 2017 by Deutsches Institut für Bautechnik

Prof. Gunter Hoppe
Head of Department

beglaubigt:
Windhorst

Annexes:

- Annex 1: Thermal insulation product characteristic
- Annex 2: Anchors
- Annex 3: Profiles
- Annex 4: Reinforcement

Annex 1: Thermal insulation product characteristic

Factory-prefabricated, uncoated panels made of expanded polystyrene (EPS) to EN 13163:2015 shall be used, having the description and characteristics defined in the Table below.

Description and characteristics	For bonded ETICS	For mechanically fixed ETICS	
		with anchors and supplementary adhesive	with profiles and supplementary adhesive****
Reaction to fire; EN 13501-1:2007	Class E*		
Thermal resistance [(m²·K)/W]	Defined in the CE marking in reference to EN 13163:2015		
Tolerances			
Length; EN 822: 2013	± 0.6 % or ± 3 mm whichever gives the greatest numerical tolerance (class L3)		
Width [mm]; EN 822:2013	± 2 (class W2)		
Thickness [mm]; EN 823: 2013	± 1 (class T1)		
Squareness [mm/m]; EN 824: 2013	± 2 (class S2)		
Flatness [mm/m]; EN 825:2013	5 (class P5)		
Dimensional stability under			
- laboratory conditions [%]; EN 1603:2013	± 0.2 (class DS(N)2)		
- specified temperature and humidity conditions [%]; EN 1604:-2013	2 (level DS(70,-)2 or level DS(70,-)1)		
Water absorption (long term partial immersion) [kg/m²]; EN 12087:2013	W _{ip} ≤ 0.5		
Water vapour diffusion resistance factor; EN 12086:2013	μ = 20 – 78		
Tensile strength perpendicular to the faces in dry conditions** [kPa]; EN 1607:2013			
- standard EPS	σ _{mt} ≥ 80	σ _{mt} ≥ 100	σ _{mt} ≥ 150
- elastified EPS***	σ _{mt} ≥ 80	σ _{mt} ≥ 80	not used
Bending strength** [kPa]; EN 12089:2013	σ _b ≥ 50		
Apparent density [kg/m³]; EN 1602:2013	ρ _a ≤ 30		
Shear strength** [kPa]; EN 12090:2013	20 ≤ f _{tk} ≤ 170		
Shear modulus [MPa]; EN 12090:2013	1.0 ≤ G _m ≤ 3.8		
- standard EPS			
- elastified EPS***	0.3 ≤ G _m ≤ 1.0	0.3 ≤ G _m ≤ 1.0	not used
Testing of characteristics see EN 13163: 2015.			
* See the conditions of clause 3.2 for the EPS.			
** Minimal value of all single values			
*** Elastified EPS is made from standard EPS by short time high load pressing to reduce the dynamic stiffness. The protection against noise of the entire wall is improved by the use of elastified EPS related to an ETICS with standard EPS.			
**** Thermal insulation materials for mechanically fixed ETICS with profiles must circumferentially at the edges, 24 mm from the inner surface, get an approx. 3 mm wide and 13 to 18 mm deep groove cut-in at the factory.			

Annex 2: Anchors

All anchors with ETA according to EAD 330196-00-0604¹ with characteristics having the description below shall be used in the mechanically fixed ETICS:

- plate diameter of anchor ≥ 60 mm resp. ≥ 90 mm
- plate stiffness ≥ 0.3 kN/mm
- load resistance of the anchor plate ≥ 1.0 kN

These characteristics and the characteristic tension resistance of the anchors shall be taken from the corresponding ETA.

Additional can be used Hilti ETICS screwed-in anchor D 8-FV with reference to ETA-07/0288.

The anchors listed in the Table in clause 1.2 with reference to the respective ETA shall be used in the mechanically fixed ETICS with profiles for fixing the horizontal profiles.


Trade name	ETA-number
WS 8 L	ETA-02/0019
WS 8 N	ETA-03/0019
ejotherm SDK U	ETA-04/0023
SDF-K plus	ETA-04/0064
ejotherm NK U	ETA-05/0009

Annex 3: Profiles


Polyvinyl chloride (PVC) profiles, PVC-U, EGL, 082-05-T33 to EN ISO 1163-1:1999, are to be used in the mechanically fixed ETICS with profiles.

The Pull-through resistance of fixings from profiles is ≥ 500 N.

Horizontal profile – "Halteleiste PVC" (dimensions in millimetres)

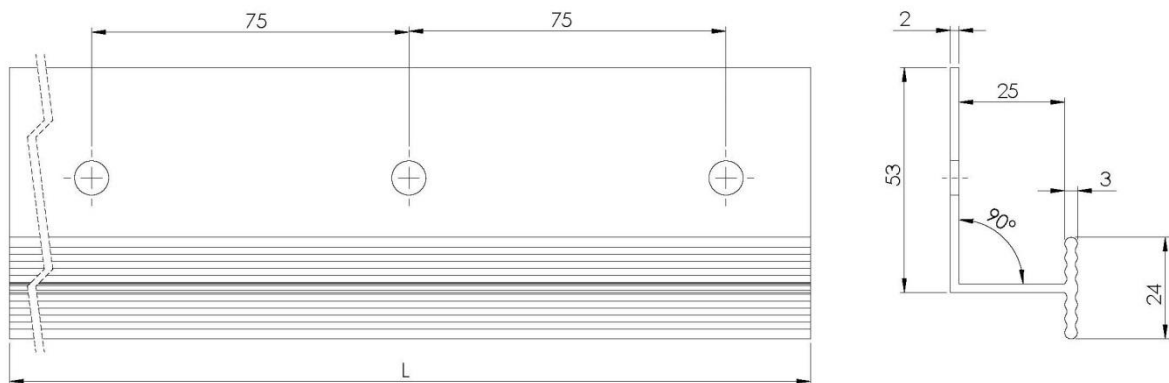

Vertical connection profile – "Verbindungsleiste PVC" (dimensions in millimetres)

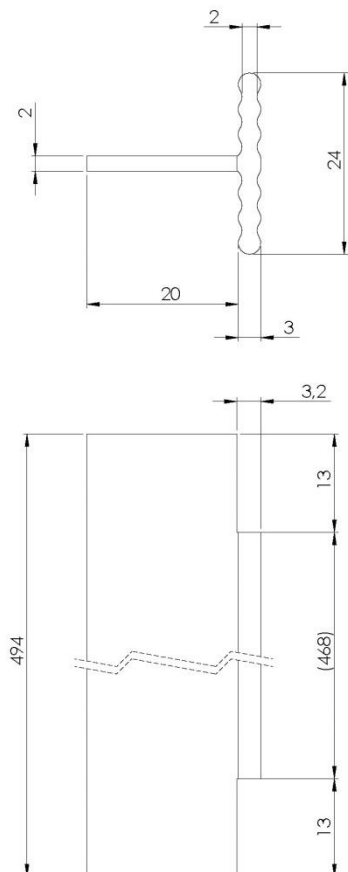

Annex 4: Reinforcement (glass fibre mesh)

Characteristics (alkali resistance): Pass

	Description	Residual strength after ageing [N/mm]	Relative residual strength after ageing, of the strength in the as delivered state [%]
"Capatect-Gewebe 650"	Alkali- and slide-resistant glass fibre mesh with mass per unit area of about 160 g/m ² and mesh size of about 4.0 mm x 4.0 mm	≥ 20	≥ 50
"Capatect-Panzergewebe 652"	(implemented in addition to the standard mesh to improve the impact resistance) Alkali- and slide-resistant glass fibre mesh with mass per unit area of about 330 g/m ² and mesh size of about 6.0 mm x 6.0 mm.	no performance assessed	no performance assessed