

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-13/0773**  
**of 1 March 2017**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Injection system VME

Product family  
to which the construction product belongs

Bonded anchor for use in uncracked concrete

Manufacturer

MKT  
Metall-Kunststoff-Technik GmbH & Co. KG  
Auf dem Immel 2  
67685 Weilerbach  
DEUTSCHLAND

Manufacturing plant

Werk 2, D

This European Technical Assessment  
contains

19 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Metal  
anchors for use in concrete", ETAG 001 Part 5: "Bonded  
anchors", April 2013,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

**European Technical Assessment**  
**ETA-13/0773**

Page 2 of 19 | 1 March 2017

English translation prepared by DIBt

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The "Injection System VME for concrete" is a bonded anchor consisting of a cartridge with injection mortar VME or VM-ME and a steel element. The steel element consists of a commercial threaded rod with washer and hexagon nut in the range of M10 to M24 or reinforcing bar in the range of diameter 10 to 25 mm.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for design	See Annex C 1 to C 4
Displacements under tension and shear loads	See Annex C 5 to C 6

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

#### 3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

#### 3.4 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

English translation prepared by DIBt

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 001, April 2013, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011, the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

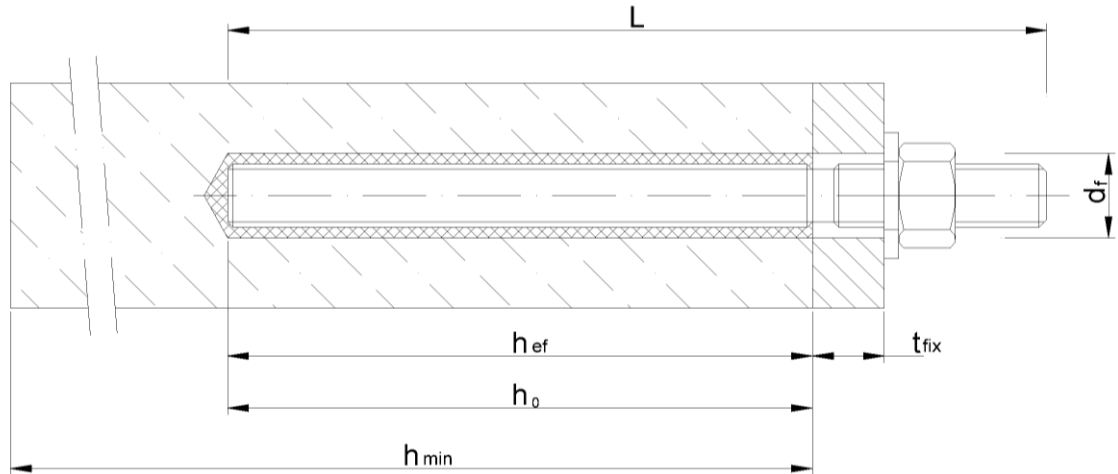
Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 1 March 2017 by Deutsches Institut für Bautechnik


Uwe Bender  
Head of Department

*beglaubigt:*  
Baderschneider

### Installation threaded rod



### Installation reinforcing bar

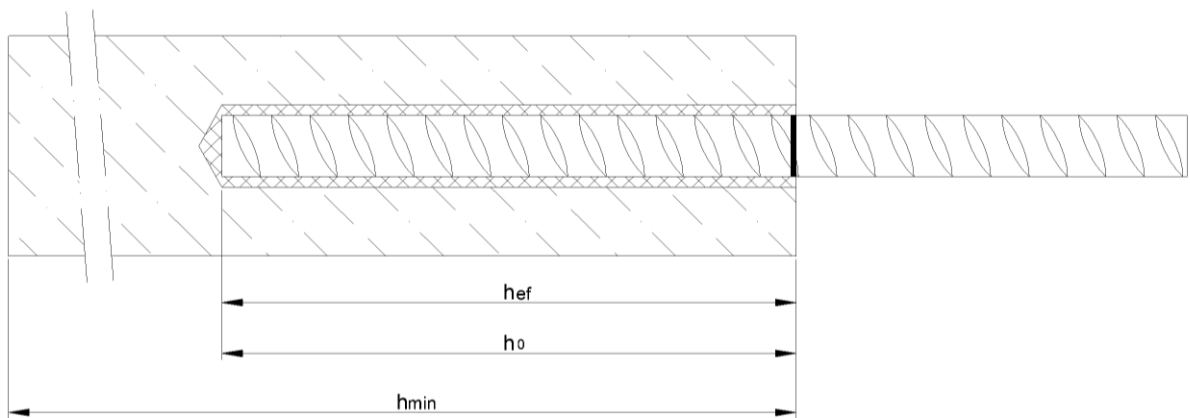

- $d_f$  = diameter of clearance hole in the fixture
- $t_{fix}$  = thickness of fixture
- $h_{ef}$  = effective anchorage depth
- $h_o$  = depth of drill hole
- $h_{min}$  = minimum thickness of member


### Injection System VME for concrete

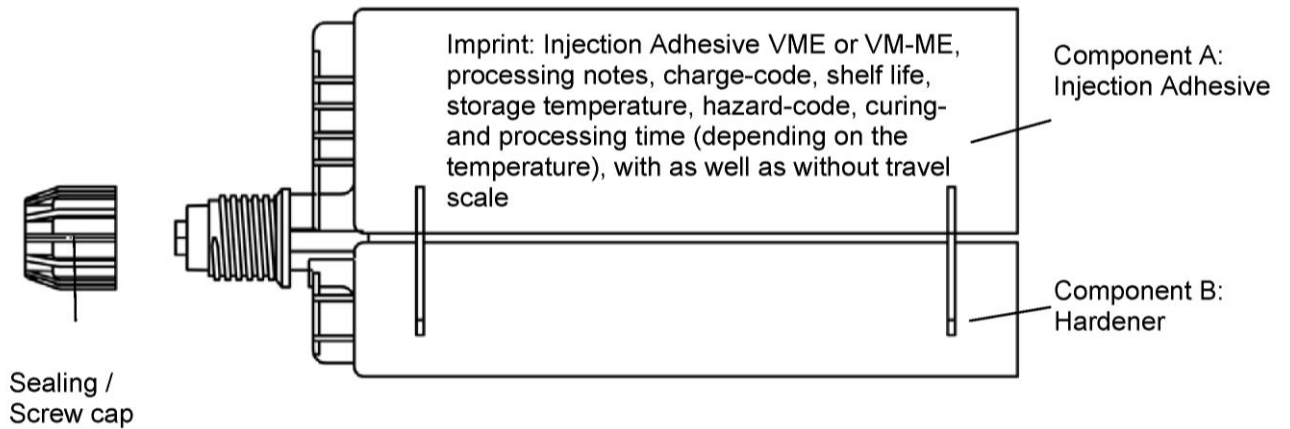Product description  
Installation conditions


Annex A1

**Cartridge: Injection Adhesive VME or Injection Adhesive VM-ME**

385ml, 444ml, 585ml, 999ml and 1400ml injection adhesive cartridge (Type: "side-by-side")



**Static Mixer**




**Injection System VME for concrete**

**Product description**  
Injection system

**Annex A2**

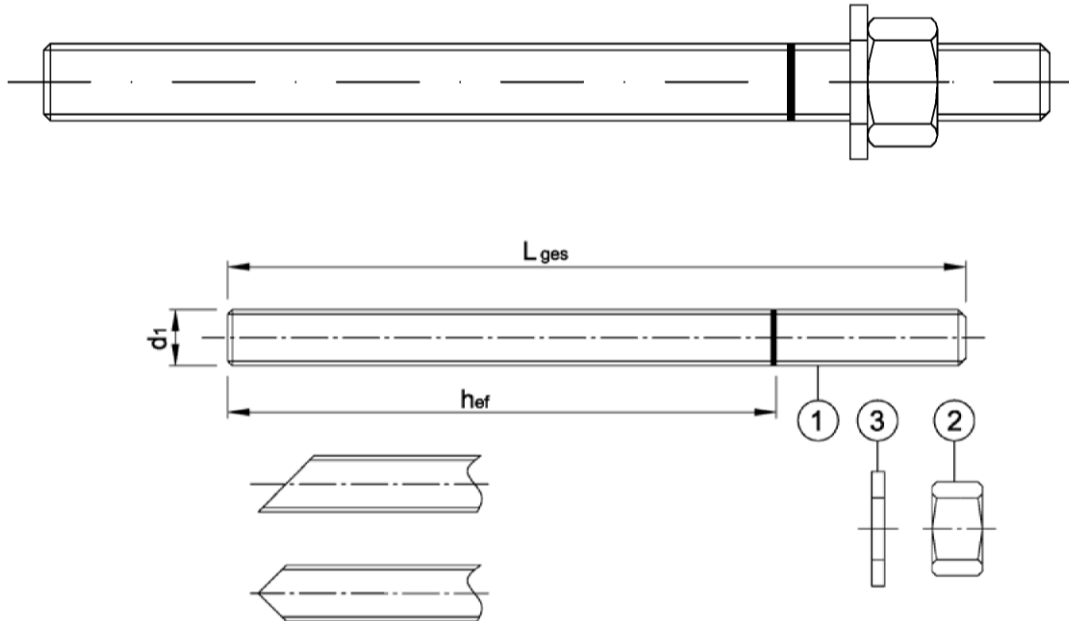
### Threaded rod M10, M12, M16, M20, M24 with washer and hexagon nut



Commercial standard threaded rod with:

- Materials, dimensions and mechanical properties acc. Table A1
- Inspection certificate 3.1 acc. to EN 10204:2004
- Marking of embedment depth

### Reinforcing bar $\varnothing 10, \varnothing 12, \varnothing 14, \varnothing 16, \varnothing 20, \varnothing 25$

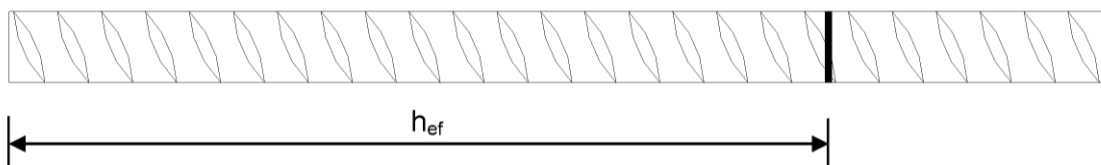

- Minimum value of related rip area  $f_{R,min}$  according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range  $0,05d \leq h \leq 0,07d$   
(d: Nominal diameter of the bar; h: Rib height of the bar)

#### Injection System VME for concrete

**Product description**  
Threaded rod and reinforcing bar

**Annex A3**

**Table A1: Materials**

Part	Designation	Material
<b>Steel, zinc plated <math>\geq 5 \mu\text{m}</math> acc. to EN ISO 4042:1999 or Steel, hot-dip galvanised <math>\geq 40 \mu\text{m}</math> acc. to EN ISO 1461:2009 and EN ISO 10684:2004+AC:2009</b>		
1	Threaded rod	Steel, acc. to EN 10087:1998 or EN 10263:2001 Property class 4.6, 5.8, 8.8, EN ISO 898-1
2	Hexagon nut	Steel, acc. to EN 10087:1998 or EN 10263:2001 Property class 4 (for class 4.6 rod) acc. to EN ISO 898-2:2012, Property class 5 (for class 5.8 rod) acc. to EN ISO 898-2:2012, Property class 8 (for class 8.8 rod) acc. to EN ISO 898-2:2012
3	Washer, acc. to EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000, or EN ISO 7094:2000	Steel, zinc plated or hot dip galvanized
<b>Stainless steel</b>		
1	Threaded rod	Material 1.4401 / 1.4404 / 1.4571, acc. to EN 10088-1:2005, Property class 70, EN ISO 3506-1:2009
2	Hexagon nut	Material 1.4401 / 1.4404 / 1.4571, acc. to EN 10088-1:2005, Property class 70, EN ISO 3506-2:2009
3	Washer, acc. to EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000, or EN ISO 7094:2000	Material 1.4401 / 1.4404 / 1.4571, acc. to EN 10088-1:2005
<b>High corrosion resistance steel</b>		
1	Threaded rod	Material 1.4529 / 1.4565, acc. to EN 10088-1:2005, Property class 70, EN ISO 3506-1:2009
2	Hexagon nut	Material 1.4529 / 1.4565, acc. to EN 10088-1:2005, Property class 70, EN ISO 3506-2:2009
3	Washer, acc. to EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000, or EN ISO 7094:2000	Material 1.4529 / 1.4565, acc. to EN 10088-1:2005
<b>Reinforcing bars</b>		
4	Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C $f_{yk}$ and $k$ according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$

**Injection System VME for concrete**

**Product description**  
Materials

**Annex A4**



## Specifications of intended use

### Anchorage subject to:

- Static and quasi static loads: M10 to M24, rebar Ø10 to Ø25

### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000
- Strength classes C20/25 to C50/60 according to EN 206-1:2000
- Uncracked concrete: M10 to M24, rebar Ø10 to Ø25

### Temperature Range:

- I: - 40 °C to +40 °C (max long term temperature +24 °C and max short term temperature +40 °C)
- II: - 40 °C to +60 °C (max long term temperature +43 °C and max short term temperature +60 °C)
- III: - 40 °C to +72 °C (max long term temperature +43 °C and max short term temperature +72 °C)

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Anchorages under static or quasi-static actions are designed in accordance with:
  - EOTA Technical Report TR 029 "Design of bonded anchors", Edition September 2010 or
  - CEN/TS 1992-4:2009

### Installation:

- Dry or wet concrete: M10 to M24, Rebar Ø10 to Ø25.
- Flooded holes (not sea water): M10 to M24, Rebar Ø10 to Ø25.
- Hole drilling by diamond drill mode.
- Overhead installation allowed.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

## Injection System VME for concrete

Intended use  
Specifications

Annex B1

**Table B1: Installation parameters for threaded rod**

Anchor size		M10	M12	M16	M20	M24
Nominal drill hole diameter	$d_0 =$ [mm]	12	14	18	24	28
Embedment depth and bore hole depth	$h_{ef,min} =$ [mm]	60	70	80	90	96
	$h_{ef,max} =$ [mm]	200	240	320	400	480
Diameter of clearance hole in the fixture	$d_f \leq$ [mm]	12	14	18	22	26
Diameter of steel brush	$d_b \geq$ [mm]	14	16	20	26	30
Installation torque	$T_{inst}$ [Nm]	20	40	80	120	160
Thickness of fixture	$t_{fix,min} >$ [mm]	0				
	$t_{fix,max} <$ [mm]	1500				
Minimum thickness of member	$h_{min}$ [mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$		$h_{ef} + 2d_0$		
Minimum spacing	$s_{min}$ [mm]	50	60	80	100	120
Minimum edge distance	$c_{min}$ [mm]	50	60	80	100	120

**Table B2: Installation parameters for rebar**


Rebar size		Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25
Nominal drill hole diameter	$d_0 =$ [mm]	14	16	18	20	24	32
Embedment depth and bore hole depth	$h_{ef,min} =$ [mm]	60	70	75	80	90	100
	$h_{ef,max} =$ [mm]	200	240	280	320	400	500
Diameter of steel brush	$d_b \geq$ [mm]	16	18	20	22	26	34
Minimum thickness of member	$h_{min}$ [mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$	$h_{ef} + 2d_0$				
Minimum spacing	$s_{min}$ [mm]	50	60	70	80	100	125
Minimum edge distance	$c_{min}$ [mm]	50	60	70	80	100	125

**Injection System VME for concrete**

**Intended use**  
Installation parameters

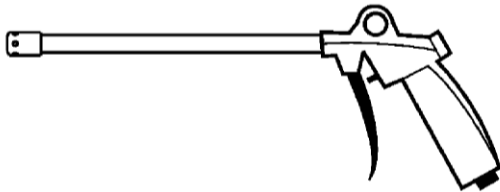
**Annex B2**

**Steel brush**




**Table B3: Parameter cleaning and setting tools**

Threaded rod	Rebar	$d_0$ Drill bit - $\emptyset$	$d_b$ Brush - $\emptyset$	$d_{b,min}$ min. Brush - $\emptyset$	Retaining washer
[mm]	[mm]	[mm]	[mm]	[mm]	[-]
M10		12	14	12,5	No retaining washer required
M12	10	14	16	14,5	
	12	16	18	16,5	
M16	14	18	20	18,5	
	16	20	22	20,5	
M20	20	24	26	24,5	VM-IA 24
M24		28	30	28,5	VM-IA 28
	25	32	34	32,5	VM-IA 32



**Rec. compressed air tool (min 6 bar)**  
All drill bit diameters ( $d_0$ )













**Retaining washer for overhead or horizontal installation**  
Drill bit diameter ( $d_0$ ): 24 mm to 32 mm

**Injection System VME for concrete**

**Intended use**  
Cleaning and setting tools

**Annex B3**

## Installation instructions






1		Drill with diamond drill a hole into the base material to the size and embedment depth required by the selected anchor (Table B1 or Table B2).
2a		Rinsing with water until clear water comes out.
2b		Check brush diameter acc. Table B3 and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush $> d_{b,min}$ (Table B3) a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used.
2c		Rinsing again with water until clear water comes out.
2d		<b>Attention! Standing water in the bore hole must be removed before cleaning.</b> Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) acc. to Annex B3, a minimum of two times. If the bore hole ground is not reached an extension shall be used.
2e		Check brush diameter acc. Table B3 and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush $> d_{b,min}$ a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used.
2f		Finally blow the hole clean again with compressed air acc. to Annex B3 (min. 6 bar) a minimum of two times. If the bore hole ground is not reached an extension shall be used.
<b>After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the adhesive in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the adhesive. In-flowing water must not contaminate the bore hole again.</b>		
3		Attach a supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. For every working interruption longer than the recommended working time (Table B4) as well as for new cartridges, a new static-mixer shall be used.
4		Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods.
5		Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the adhesive shows a consistent colour.

### Injection System VME for concrete

Intended use  
Installation instruction

Annex B4

### Installation instructions (continuation)

6		Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used. For overhead and horizontal installation a retaining washer and extension nozzle (Annex B3) shall be used. Observe the working times given in Table B4.
7		Push the threaded rod or reinforcing bar into the hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.  The anchor should be free of dirt, grease, oil or other foreign material.
8		Be sure that the anchor is fully seated at the bottom of the hole and that excess adhesive is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).
9		Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B4).
10		After full curing, the add-on part can be installed with the maximum torque (Table B1) by using a calibrated torque wrench.

**Table B4: Working and curing time**

Bore hole temperature	Maximum working time	Minimum curing time	
		dry concrete	wet concrete
≥ + 5 °C	120 min	50 h	100 h
≥ + 10 °C	90 min	30 h	60 h
≥ + 20 °C	30 min	10 h	20 h
≥ + 30 °C	20 min	6 h	12 h
≥ + 40 °C	12 min	4 h	8 h

#### Injection System VME for concrete

**Intended use**  
Installation instruction (continuation)  
Working and curing time

**Annex B5**

**Table C1: Characteristic values for threaded rods under tension loads in uncracked concrete**

Anchor size threaded rod			M 10	M 12	M 16	M 20	M 24	
<b>Steel failure</b>								
Characteristic tension resistance, Steel, property class 4.6	$N_{Rk,s}$	[kN]	23	34	63	98	141	
Characteristic tension resistance, Steel, property class 5.8	$N_{Rk,s}$	[kN]	29	42	78	122	176	
Characteristic tension resistance, Steel, property class 8.8	$N_{Rk,s}$	[kN]	46	67	125	196	282	
Characteristic tension resistance, Stainless steel A4 and HCR, property class 70	$N_{Rk,s}$	[kN]	41	59	110	171	247	
<b>Combined pull-out and concrete cone failure</b>								
Characteristic bond resistance in non-cracked concrete C20/25								
Temperature range I: 40°C/24°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11	10	10	9,5	9,0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	9,0	10	9,5	9,5	8,5
Temperature range II: 60°C/43°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	7,0	6,5	6,0	6,0	5,5
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	5,5	6,5	6,0	6,0	5,5
Temperature range III: 72°C/43°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	6,0	6,0	5,5	5,0	5,0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	5,0	6,0	5,0	5,0	5,0
Increasing factor for concrete	$\psi_c$	C30/37	[-]	1,04				
		C40/50	[-]	1,08				
		C50/60	[-]	1,10				
Factor according to CEN/TS 1992-4-5 Section 6.2.2.3		$k_B$	[-]	10,1				
<b>Concrete cone failure</b>								
Factor according to CEN/TS 1992-4-5 Section 6.2.3.1		$k_{ucr}$	[-]	10,1				
Edge distance		$c_{cr,N}$	[mm]	1,5 $h_{ef}$				
Spacing		$s_{cr,N}$	[mm]	3,0 $h_{ef}$				
<b>Splitting failure</b>								
Edge distance		$c_{cr,sp}$	[mm]	$1,0 \cdot h_{ef} \leq 2 \cdot h_{ef} \left( 2,5 - \frac{h}{h_{ef}} \right) \leq 2,4 \cdot h_{ef}$				
Spacing		$s_{cr,sp}$	[mm]	$2 c_{cr,sp}$				
Installation safety factor		$\gamma_2 = \gamma_{inst}$	[-]	1,0	1,2			

**Injection System VME for concrete**

**Performances**

Characteristic values of resistance for threaded rods under tension loads in uncracked concrete

**Annex C1**

**Table C2: Characteristic values for threaded rods under shear loads in uncracked concrete**

Anchor size threaded rod			M 10	M 12	M 16	M 20	M24
<b>Steel failure without lever arm</b>							
Characteristic shear resistance, Steel, property class 4.6	$V_{Rk,s}$	[kN]	12	17	31	49	71
Characteristic shear resistance, Steel, property class 5.8	$V_{Rk,s}$	[kN]	15	21	39	61	88
Characteristic shear resistance, Steel, property class 8.8	$V_{Rk,s}$	[kN]	23	34	63	98	141
Characteristic shear resistance, Stainless steel A4 and HCR, property class 70	$V_{Rk,s}$	[kN]	20	30	55	86	124
Ductility factor according to CEN/TS 1992-4-5 Section 6.3.2.1	$k_2$	[-]	0,8				
<b>Steel failure with lever arm</b>							
Characteristic bending moment, Steel, property class 4.6	$M^0_{Rk,s}$	[Nm]	30	52	133	260	449
Characteristic bending moment, Steel, property class 5.8	$M^0_{Rk,s}$	[Nm]	37	65	166	324	560
Characteristic bending moment, Steel, property class 8.8	$M^0_{Rk,s}$	[Nm]	60	105	266	519	896
Characteristic bending moment, Stainless steel A4 and HCR, property class 70	$M^0_{Rk,s}$	[Nm]	52	92	232	454	784
<b>Concrete pry-out failure</b>							
Factor k acc. to TR029 und $k_3$ acc. to CEN/TS 1992-4-5 Section 6.3.3	$k_{(3)}$	[-]	2,0				
<b>Concrete edge failure</b>							
Effective length of anchor	$l_f$	[mm]	$l_f = \min(h_{ef}; 8 d_{nom})$				
Outside diameter of anchor	$d_{nom}$	[mm]	10	12	16	20	24
Installation safety factor[-]	$\gamma_2 = \gamma_{inst}$	[-]	1,0				

**Injection System VME for concrete**

**Performances**

Characteristic values of resistance for threaded rods under shear loads in uncracked concrete

**Annex C2**

**Table C3: Characteristic values for rebar under tension loads in uncracked concrete**

Anchor size reinforcing bar				Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25
<b>Steel failure</b>									
Characteristic tension resistance		$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$					
<b>Combined pull-out and concrete cone failure</b>									
Characteristic bond resistance in non-cracked concrete C20/25									
Temperature range I: 40°C/24°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	11	10	10	10	9,5	9,0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	9,0	10	10	9,5	9,5	8,5
Temperature range II: 60°C/43°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	7,0	6,5	6,5	6,0	6,0	5,5
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	5,5	6,5	6,5	6,0	6,0	5,5
Temperature range III: 72°C/43°C	dry and wet concrete	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	6,0	6,0	6,0	5,5	5,0	5,0
	flooded bore hole	$\tau_{Rk,ucr}$	[N/mm <sup>2</sup> ]	5,0	6,0	5,5	5,5	5,0	5,0
Increasing factor for concrete		$\psi_c$	C30/37	[-]	1,04				
			C40/50	[-]	1,08				
			C50/60	[-]	1,10				
Factor according to CEN/TS 1992-4-5 Section 6.2.2.3		$k_B$	[-]	10,1					
<b>Concrete cone failure</b>									
Factor according to CEN/TS 1992-4-5 Section 6.2.3.1		$k_{ucr}$	[-]	10,1					
Edge distance		$c_{cr,N}$	[mm]	1,5 $h_{ef}$					
Spacing		$s_{cr,N}$	[mm]	3,0 $h_{ef}$					
<b>Splitting failure</b>									
Edge distance		$c_{cr,sp}$	[mm]	$1,0 \cdot h_{ef} \leq 2 \cdot h_{ef} \left( 2,5 - \frac{h}{h_{ef}} \right) \leq 2,4 \cdot h_{ef}$					
Spacing		$s_{cr,sp}$	[mm]	2 $c_{cr,sp}$					
Installation safety factor		$\gamma_2 = \gamma_{inst}$	[-]	1,0	1,2				

**Injection System VME for concrete**

**Performances**

Characteristic values of resistance for rebar under tension loads in uncracked concrete

**Annex C3**



**Table C4:** Characteristic values for **rebar** under **shear loads** in uncracked concrete

Anchor size reinforcing bar			Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25
<b>Steel failure without lever arm</b>								
Characteristic shear resistance	$V_{Rk,s}$	[kN]	$0,50 \cdot A_s \cdot f_{uk}$					
Ductility factor according to CEN/TS 1992-4-5 Section 6.3.2.1	$k_2$	[-]	0,8					
<b>Steel failure with lever arm</b>								
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$					
<b>Concrete pry-out failure</b>								
Factor k acc. to TR029 und $k_3$ acc. to CEN/TS 1992-4-5 Section 6.3.3	$k_{(3)}$	[-]	2,0					
<b>Concrete edge failure</b>								
Effective length of anchor	$l_f$	[mm]	$l_f = \min(h_{ef}; 8 d_{nom})$					
Outside diameter of anchor	$d_{nom}$	[mm]	10	12	14	16	20	25
Installation safety factor	$\gamma_2 = \gamma_{inst}$	[-]	1,0					

**Injection System VME for concrete**

**Performances**

Characteristic values of resistance for **rebar** under shear loads in uncracked concrete

**Annex C4**

**Table C5: Displacements under tension loads <sup>1)</sup> (threaded rod)**

Anchor size threaded rod			M 10	M 12	M 16	M 20	M 24
<b>Temperature range 40°C/24°C for non-cracked concrete C20/25</b>							
Displacement	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,013	0,015	0,020	0,024	0,029
Displacement	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,052	0,061	0,079	0,096	0,114
<b>Temperature range 72°C/43°C and 60°C/43°C for non-cracked concrete C20/25</b>							
Displacement	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,015	0,018	0,023	0,028	0,033
Displacement	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,060	0,070	0,091	0,111	0,131

<sup>1)</sup> Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond strength}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

**Table C6: Displacement under shear load <sup>1)</sup> (threaded rod)**

Anchor size threaded rod			M10	M12	M16	M20	M24
Displacement	$\delta_{V0}$ -factor	[mm/(kN)]	0,06	0,05	0,04	0,04	0,03
Displacement	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,08	0,08	0,06	0,06	0,05

<sup>1)</sup> Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

**Injection System VME for concrete**

**Performances**  
Displacements (threaded rods)

**Annex C5**

**Table C7: Displacements under tension loads <sup>1)</sup> (rebar)**

Anchor size reinforcing bar			Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25
<b>Temperature range 40°C/24°C for non-cracked concrete C20/25</b>								
Displacement	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,013	0,015	0,018	0,020	0,024	0,030
Displacement	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,052	0,061	0,070	0,079	0,096	0,118
<b>Temperature range 72°C/43°C and 60°C/43°C for non-cracked concrete C20/25</b>								
Displacement	$\delta_{N0}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,015	0,018	0,020	0,023	0,028	0,034
Displacement	$\delta_{N\infty}$ -factor	[mm/(N/mm <sup>2</sup> )]	0,060	0,070	0,081	0,091	0,111	0,136

<sup>1)</sup> Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau; \quad \tau: \text{action bond strength}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

**Table C8: Displacement under shear load <sup>1)</sup> (rebar)**

Anchor size reinforcing bar			Ø 10	Ø 12	Ø 14	Ø 16	Ø 20	Ø 25
Displacement	$\delta_{V0}$ -factor	[mm/(kN)]	0,05	0,05	0,04	0,04	0,04	0,03
Displacement	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,08	0,07	0,06	0,06	0,05	0,05

<sup>1)</sup> Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V; \quad V: \text{action shear load}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

**Injection System VME for concrete**

**Performances**  
Displacements (rebar)

**Annex C6**