

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-17/0130**  
**of 20 February 2017**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Mungo Injection System MIT-Hybrid for  
rebar connection

Product family  
to which the construction product belongs

System for post installed rebar  
connection with mortar

Manufacturer

Mungo Befestigungstechnik AG  
Bornfeldstrasse 2  
4603 OLTEN  
SCHWEIZ

Manufacturing plant

Werk 13 / Plant 13

This European Technical Assessment  
contains

20 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

European Assessment Document (EAD)  
330087-00-0601

**European Technical Assessment**

**ETA-17/0130**

English translation prepared by DIBt

**Page 2 of 20 | 20 February 2017**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

**Specific Part****1 Technical description of the product**

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "Mungo Injection system MIT-Hybrid for rebar connection" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars made of steel with a diameter  $\phi$  from 8 to 32 mm or tension anchors ZA sizes M12, M16 and M20 according to Annex A and injection mortar MIT-Hybrid are used for rebar connections. The rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between rebar, injection mortar and concrete.

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment****3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Amplification factor $\alpha_{lb}$ , Bond resistance $f_{bd}$	See Annex C1

**3.2 Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	See Annex C2

**3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

**3.4 Safety in use (BWR 4)**

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with European Assessment Document EAD No. 330087-00-0601, the applicable European legal act is: [96/582/EC].

The system(s) to be applied is (are): 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 20 February 2017 by Deutsches Institut für Bautechnik

Andreas Kummerow  
p.p. Head of Department


*beglaubigt:*  
Baderschneider

Installation post installed rebar


**Figure A1:** Overlapping joint for rebar connections of slabs and beams

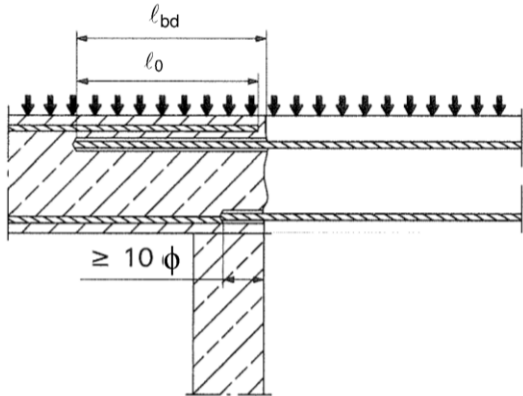


**Figure A3:** End anchoring of slabs or beams (e.g. designed as simply supported)

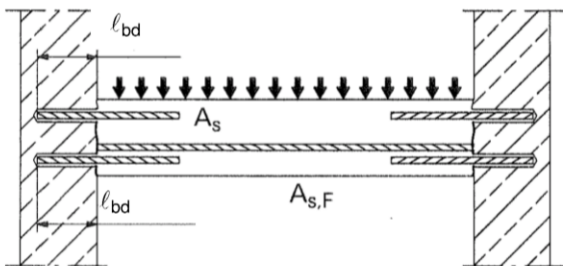


**Figure A5:** Anchoring of reinforcement to cover the line of acting tensile force

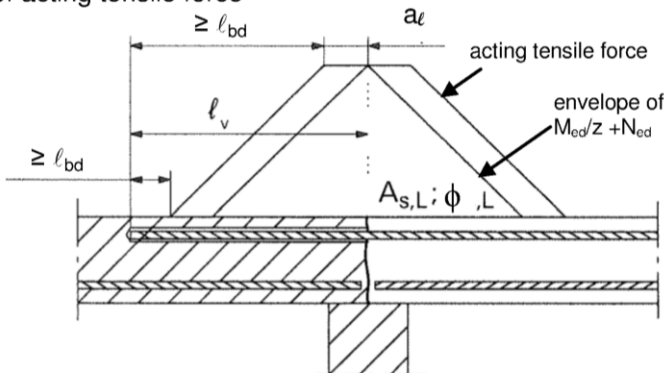

**Figure A2:** Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension

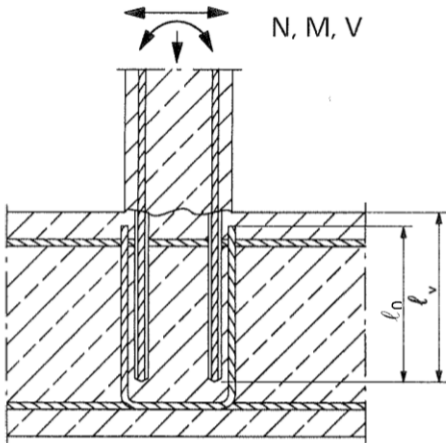

**Figure A4:** Rebar connection for components stressed primarily in compression. The rebars are stressed in compression

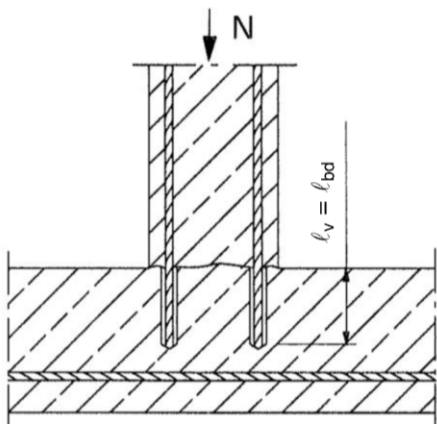

**Note to Figure A1 to A5:**

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

Mungo Injection system MIT-Hybrid for rebar connection


**Product description**

Installed condition and examples of use for rebars


**Annex A 1**

Installation tension anchor ZA


**Figure A6:** Overlapping joint of a column stressed in bending to a foundation

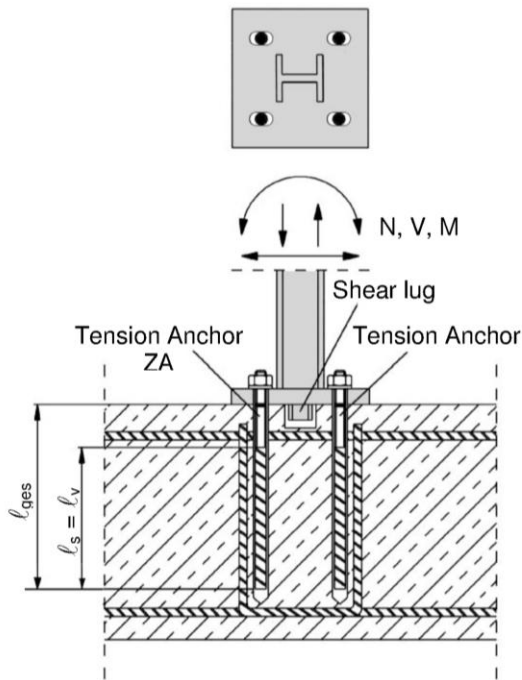

**Figure A7:** Overlap joint for the anchorage of barrier posts

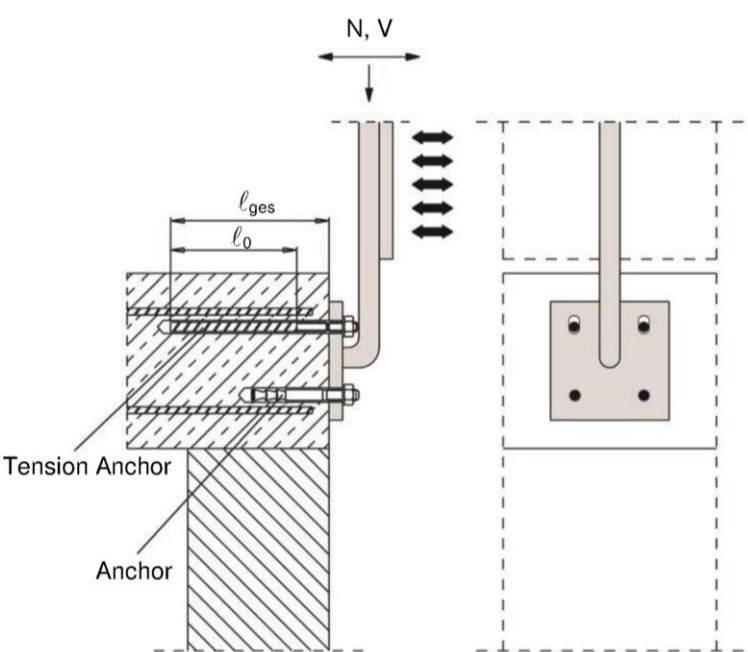

**Figure A8:** Overlap joint for the anchorage to cantilever members

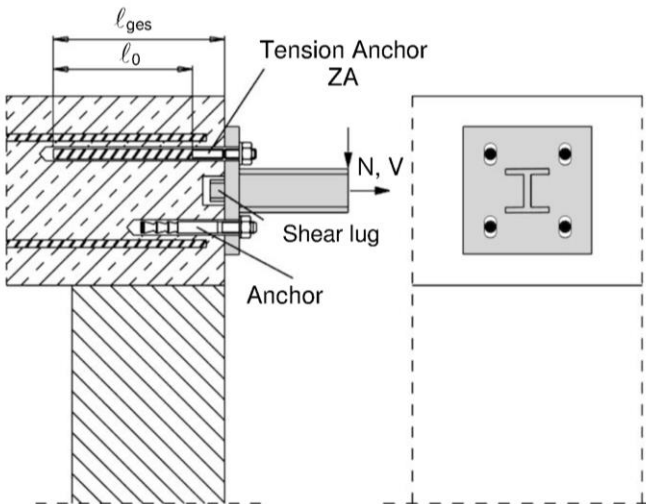

**Note to Figure A6 to A8:**

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010

Mungo Injection system MIT-Hybrid for rebar connection

**Product description**

Installed condition and examples of use for tension anchors ZA

**Annex A 2**

## Mungo Injection system MIT-Hybrid:

### Injection mortar: MIT-Hybrid


**Typ "coaxial":** 150 ml, 280 ml,  
300 ml up to 333 ml and  
380 ml up to 420 ml cartridge



Imprint: MIT-Hybrid, processing notes, charge-code, shelf life, hazard-code, curing- and processing time (depending on the temperature), optional with travel scale


### Type "side-by-side":

235 ml, 345 ml and 825 ml  
cartridge




Imprint: MIT-Hybrid, processing notes, charge-code, shelf life, hazard-code, curing- and processing time (depending on the temperature), optional with travel scale

### Static Mixer

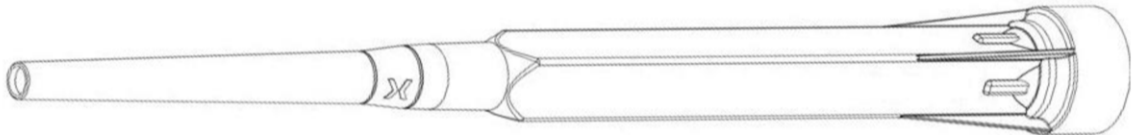


### Piston plug and mixer extension

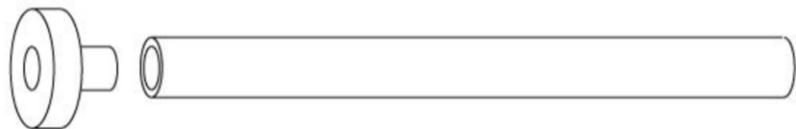

### Reinforcing bar (rebar): $\varnothing 8$ to $\varnothing 32$



### Tension Anchor ZA: M12 to M20

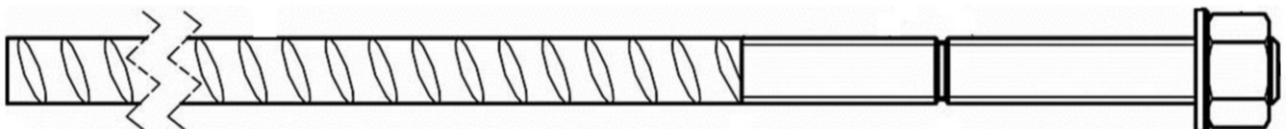

### Mungo Injection system MIT-Hybrid for rebar connection

#### Product description

Injection mortar / Static mixer / Rebar / Tension Anchor ZA

### Annex A 3



## Reinforcing bar (rebar): $\varnothing 8$ , $\varnothing 10$ , $\varnothing 12$ , $\varnothing 14$ , $\varnothing 16$ , $\varnothing 20$ , $\varnothing 22$ , $\varnothing 24$ , $\varnothing 25$ , $\varnothing 28$ , $\varnothing 32$




- Minimum value of related rip area  $f_{R,min}$  according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range  $0,05\phi \leq h \leq 0,07\phi$   
( $\phi$ : Nominal diameter of the bar; h: Rip height of the bar)


**Table A1: Materials**


Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C $f_{yk}$ and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k \cdot f_{yk}$
Mungo Injection system MIT-Hybrid for rebar connection	Annex A 4
Product description Specifications Rebar	



## Tension Anchor ZA: M12, M16, M20

Marking: e.g.  12 A4

-  Mark of the producer  
ZA Trade name  
12 Rod diameter/thread  
A4 for stainless steel A4  
HCR for high corrosion resistance steel

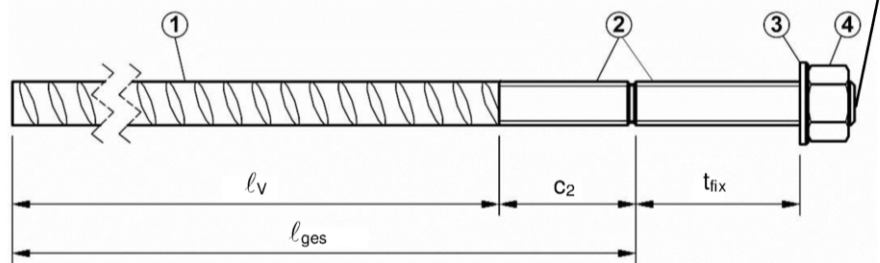

**Table A2: Materials**

Part	Designation	Material	
		ZA A4	ZA HCR
1	Reinforcement bar	B500 B, DIN 488	
2	Threaded rod	Stainless steel, 1.4362, 1.4401, 1.4404, 1.4571, EN 10088-1:2005	High corrosion resistance steel, 1.4529, 1.4565, EN 10088-1:2005
3	Washer		
4	Nut		

**Table A3: Dimensions and installation parameter**

Size			M12	M16	M20
Diameter of reinforcement bar		[mm]	12	16	20
With across nut flats	SW	[mm]	19	24	30
Effective embedment depth	$l_v$	[mm]	according to static calculation		
Length of bonded thread	$c_2$	[mm]	$\geq 100$	$\geq 100$	$\geq 100$
Minimum thickness of fixture	$t_{fix}$	[mm]	5	5	5
Maximum thickness of fixture	$t_{fix}$	[mm]	3000	3000	3000
Maximum installation torque	$T_{max}$	[Nm]	40	60	100

Mungo Injection system MIT-Hybrid for rebar connection

**Product description**  
Specifications Tension Anchor ZA

**Annex A 5**

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads.
- Fire exposure

### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C50/60 according to EN 206-1:2000.
- Maximum chloride concrete of 0,40% (CL 0.40) related to the cement content according to EN 206-1:2000.
- Non-carbonated concrete.

Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of  $\phi + 60$  mm prior to the installation of the new rebar.

The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010.

The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

### Temperature Range:

- - 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions or subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010 and Annex B 2 and B 3.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

### Installation:

- Dry or wet concrete.
- It must not be installed in flooded holes.
- Hole drilling by hammer drill (HD) or compressed air drill mode (CA).
- The installation of post-installed rebar resp. tension anchors shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).


Mungo Injection system MIT-Hybrid for rebar connection

Intended use  
Specifications

Annex B 1

**Figure B1: General construction rules for post-installed rebars**

- Only tension forces in the axis of the rebar may be transmitted
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

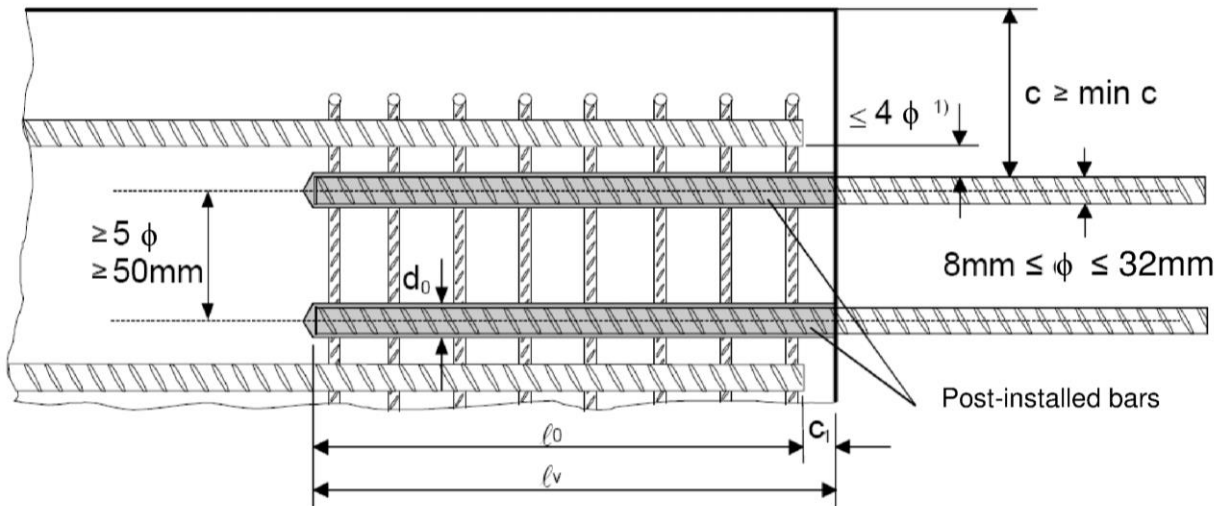

<sup>1)</sup> If the clear distance between lapped bars exceeds  $4\phi$ , then the lap length shall be increased by the difference between the clear bar distance and  $4\phi$ .

The following applies to Figure B1:

$c$	concrete cover of post-installed rebar
$c_1$	concrete cover at end-face of existing rebar
$\min c$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
$\phi$	diameter of post-installed rebar
$\ell_0$	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$\ell_v$	effective embedment depth, $\geq \ell_0 + c_1$
$d_0$	nominal drill bit diameter, see Annex B 6

Mungo Injection system MIT-Hybrid for rebar connection


**Intended use**

General construction rules for post-installed rebars

**Annex B 2**

Figure B2: General construction rules for tension anchors ZA

- The length of the bonded-in thread may not be accounted as anchorage
- Only tension forces in the direction of the bar axis may be transmitted by the tension anchor ZA
- The tension force must be transferred via an overlap joint to the reinforcement in the building part.
- The transfer of shear forces shall be ensured by appropriate additional measures, e.g. shear lugs or by anchors with an European technical assessment.
- In the anchor plate, the holes for the tension anchors shall be executed as elongated holes with axis in the direction of the shear force.

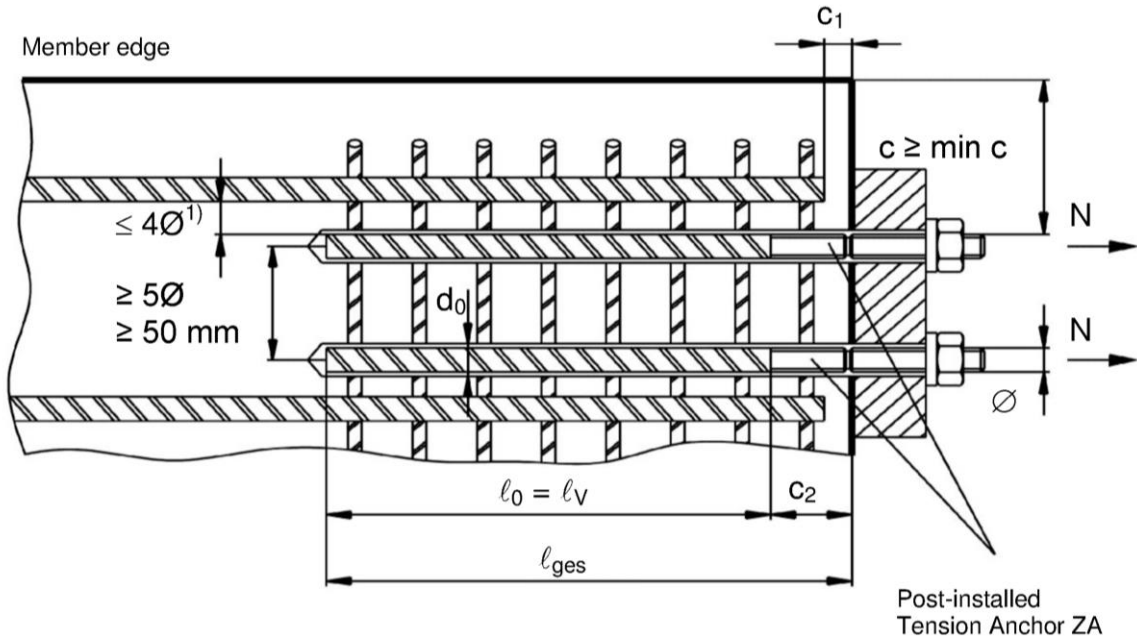

1) If the clear distance between lapped bars exceeds  $4\phi$ , then the lap length shall be increased by the difference between the clear bar distance and  $4\phi$ .

The following applies to Figure B2:

c	concrete cover of tension anchor ZA
$c_1$	concrete cover at end-face of existing rebar
$c_2$	Length of bonded thread
min c	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
$\phi$	diameter of tension anchor
$l_0$	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$l_v$	effective embedment depth, $\geq l_0 + c_1$
$l_{ges}$	overall embedment depth, $\geq l_0 + c_2$
$d_0$	nominal drill bit diameter, see Annex B 6

Mungo Injection system MIT-Hybrid for rebar connection


Intended use

General construction rules for tension anchors

Annex B 3



**Table B1: Minimum concrete cover min  $c^1$  of post-installed rebar depending of drilling method**



Drilling method	Rebar diameter	Without drilling aid	With drilling aid
Hammer drilling (HD)	< 25 mm	$30 \text{ mm} + 0,06 \cdot \ell_v \geq 2 \phi$	$30 \text{ mm} + 0,02 \cdot \ell_v \geq 2 \phi$
	$\geq 25 \text{ mm}$	$40 \text{ mm} + 0,06 \cdot \ell_v \geq 2 \phi$	$40 \text{ mm} + 0,02 \cdot \ell_v \geq 2 \phi$
Compressed air drilling (CD)	< 25 mm	$50 \text{ mm} + 0,08 \cdot \ell_v$	$50 \text{ mm} + 0,02 \cdot \ell_v$
	$\geq 25 \text{ mm}$	$60 \text{ mm} + 0,08 \cdot \ell_v$	$60 \text{ mm} + 0,02 \cdot \ell_v$

<sup>1)</sup> see Annex B2, Figures B1 and Annex B3, Figure B2  
Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed

**Table B2: maximum embedment depth  $\ell_{v,max}$**

Rebar	Tension anchor	$\ell_{v,max}$ [mm]
$\phi$	$\phi$	
8 mm		1000
10 mm		1000
12 mm	M12	1200
14 mm		1400
16 mm	M16	1600
20 mm	M20	2000
22 mm		2000
24 mm		2000
25 mm		2000
28 mm		2000
32 mm		2000

**Table B3: Base material temperature, gelling time and curing time**

Concrete temperature	Gelling working time <sup>1)</sup>	Minimum curing time in dry concrete	Minimum curing time in wet concrete
- 5 °C to - 1 °C	50 min	5 h	10 h
0 °C to + 4 °C	25 min	3,5 h	7 h
+ 5 °C to + 9 °C	15 min	2 h	4 h
+ 10 °C to + 14 °C	10 min	1 h	2 h
+ 15 °C to + 19 °C	6 min	40 min	60 min
+ 20 °C to + 29 °C	3 min	30 min	60 min
+ 30 °C to + 40 °C	2 min	30 min	60 min
Cartridge temperature	+5°C to +40°C		

<sup>1)</sup>  $t_{gel}$ : maximum time from starting of mortar injection to completing of rebar setting.










**Mungo Injection system MIT-Hybrid for rebar connection**

**Intended use**

Minimum concrete cover  
Maximum embedment depth / working time and curing times

**Annex B 4**

**Table B4: Dispensing tools**

Cartridge type/size	Hand tool		Pneumatic tool
Coaxial cartridges 150, 280, 300 up to 333 ml	 e.g. Type H 297 or H244C		 e.g. Type TS 492 X
Coaxial cartridges 380 up to 420 ml	 e.g. Type CCM 380/10	 e.g. Type H 285 or H244C	 e.g. Type TS 485 LX
Side-by-side cartridges 235, 345 ml	 e.g. Type CBM 330A	 e.g. Type H 260	 e.g. Type TS 477 LX
Side-by-side cartridge 825 ml	-	-	 e.g. Type TS 498X


All cartridges could also be extruded by a battery tool.

**Mungo Injection system MIT-Hybrid for rebar connection**

**Intended Use**  
Dispensing tools

**Annex B 5**


## A) Bore hole drilling



1. Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar with carbide hammer drill (HD) or a compressed air drill (CD). In case of aborted drill hole: the drill hole shall be filled with mortar.



Hammer drill (HD)




Compressed air drill (CD)


Rebar - $\phi$	ZA- $\phi$	Drill - $\phi$ [mm]
8 mm		12
10 mm		14
12 mm	M12	16
14 mm		18
16 mm	M16	20
20 mm	M20	25
22 mm		28
24 mm		32
25 mm		32
28 mm		35
32 mm		40

## B) Bore hole cleaning


**MAC: Cleaning for bore hole diameter  $d_0 \leq 20\text{mm}$  and bore hole depth  $h_0 \leq 10d_s$**



- 2a. Starting from the bottom or back of the bore hole, blow the hole clean with a hand pump (Annex B 7) a minimum of four times.



- 2b. Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (Table B5) a minimum of four times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension shall be used.




- 2c. Finally blow the hole clean again with a hand pump (Annex B 7) a minimum of four times.


**CAC: Cleaning for all bore hole diameter and bore hole depth**



- 2a. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.



- 2b. Check brush diameter (Table B5). Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (Table B5) a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used (Table B5).



- 2c. Finally blow the hole clean again with compressed air (min. 6 bar) (Annex B 7) a minimum of two times until return air stream is free of noticeable dust. If the bore hole ground is not reached an extension shall be used.

**Mungo Injection system MIT-Hybrid for rebar connection**

**Intended Use**


Installation instruction: Bore hole drilling and  
Bore hole cleaning

**Annex B 6**




**Table B5: Cleaning tools**

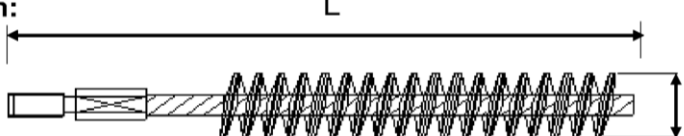

**Brush:**




**Brush extension:**



**SDS Plus Adapter:**


**Hand pump (volume 750 ml)**




**Rec. compressed air tool hand slide valve (min 6 bar)**

$\phi$ Rebar (mm)	$\phi$ Tension anchor (mm)	$d_0$ Drill bit - $\phi$ (mm)	$d_b$ Brush - $\phi$ (mm)	$d_{b,min}$ min. Brush - $\phi$ (mm)
8		12	14	12,5
10		14	16	14,5
12	M12	16	18	16,5
14		18	20	18,5
16	M16	20	22	20,5
20	M20	25	27	25,5
22		28	30	28,5
24		32	34	32,5
25		32	34	32,5
28		35	37	35,5
32		40	41,5	40,5


**C) Preparation of bar and cartridge**




3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.  
For every working interruption longer than the recommended working time (Table B3) as well as for every new cartridges, a new static-mixer shall be used.



- 3a. In case of using the mixer extension VL16/1,8, the tip of the mixer nozzle has to be cut off at position „X“.



4. Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar and insert bar in empty hole to verify hole and depth  $\ell_v$ .  
The reinforcing bar should be free of dirt, grease, oil or other foreign material.



5. Prior to dispensing into the anchor hole, squeeze out separately the mortar until it shows a consistent grey colour, but a minimum of three full strokes, and discard non-uniformly mixed adhesive components.


**Mungo Injection system MIT-Hybrid for rebar connection**

**Intended Use**


Installation instruction: Cleaning tools and  
Preparation of bar and cartridge

**Annex B 7**

## D) Filling the bore hole



6. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used.




For overhead and horizontal installation and bore holes deeper than 240 mm a piston plug and the appropriate mixer extension must be used.

Observe the gel-/ working times given in Table B3.

**Table B6: Piston plugs, max anchorage depth and mixer extension**

Bar size  ϕ	Tension anchor  ϕ	Drill bit - Ø		Piston plug	Cartridge: All sizes				Cartridge: side-by-side (825 ml)	
					Hand or battery tool		Pneumatic tool		Pneumatic tool	
		HD	CA		l <sub>v,max</sub>	Mixer extension	l <sub>v,max</sub>	Mixer extension	l <sub>v,max</sub>	Mixer extension
[mm]	[mm]	[mm]		No.	[cm]		[cm]		[cm]	
8		12	-	-	70	VL 10/0,75	80	VL 10/0,75	80	VL 10/0,75
10		14	-	#14			100		100	
12	M12	16		#16					120	VL 16/1,8
14		18		#18					140	
16	M16	20		#20			160			
20	M20	25	26	#25	50	VL 10/0,75	200	VL 16/1,8		
22		28		#28						
24		32		#32						
25		32		#32						
28		35		#35						
32		40		#40			200			

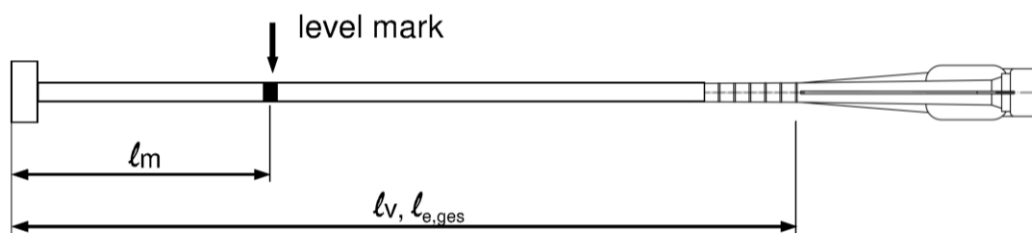

Injection tool must be marked by mortar level mark  $l_m$  and anchorage depth  $l_v$  resp.  $l_{e,ges}$  with tape or marker.

Quick estimation:  $l_m = 1/3 \cdot l_v$

Continue injection until the mortar level mark  $l_m$  becomes visible.

Optimum mortar volume:  $l_m = l_v$  resp  $l_{e,ges} \cdot \left( 1,2 \cdot \frac{\phi^2}{d_0^2} - 0,2 \right)$  [mm]


**Mungo Injection system MIT-Hybrid for rebar connection**

**Intended Use**

Installation instruction: Filling the bore hole


**Annex B 8**

## E) Inserting the rebar




7. Push the reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

The bar should be free of dirt, grease, oil or other foreign material.



8. Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).



9. Observe gelling time  $t_{gel}$ . Attend that the gelling time can vary according to the base material temperature (see Table B3). It is not allowed to move the bar after gelling time  $t_{gel}$  has elapsed. Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured (attend Table B3). After full curing time  $t_{cure}$  has elapsed, the add-on part can be installed.

Mungo Injection system MIT-Hybrid for rebar connection

Intended Use

Installation instruction: Inserting rebar

Annex B 9

## Minimum anchorage length and minimum lap length

The minimum anchorage length  $\ell_{b,min}$  and the minimum lap length  $\ell_{0,min}$  according to EN 1992-1-1:2004+AC:2010 ( $\ell_{b,min}$  acc. to Eq. 8.6 and Eq. 8.7 and  $\ell_{0,min}$  acc. to Eq. 8.11) shall be multiply by the amplification factor  $\alpha_{lb}$  according to Table C1.

**Table C1: Amplification factor related to concrete class and drilling method**

Concrete class	Drilling method	Bar size	Amplification factor $\alpha_{lb}$
C12/15 to C50/60	Hammer drilling and compressed air drilling	8 mm to 32 mm ZA-M12 to ZA-M20	1,0

**Table C2: Design values of the ultimate bond resistance  $f_{bd}$  in N/mm<sup>2</sup> for all drilling methods for good conditions**

according to EN 1992-1-1:2004+AC:2010 for good bond conditions  
(for all other bond conditions multiply the values by 0.7)

Rebar - Ø	Concrete class								
$\phi$	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 32 mm ZA-M12 to ZA-M20	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3

Mungo Injection system MIT-Hybrid for rebar connection

### Performances


Amplification factor  $\alpha_{lb}$

Design values of ultimate bond resistance  $f_{bd}$

**Annex C 1**

Reduction factor  $k_{fi}(\theta)$  for design in case of fire

according to EN 1992-1-2:2004 + AC:2008

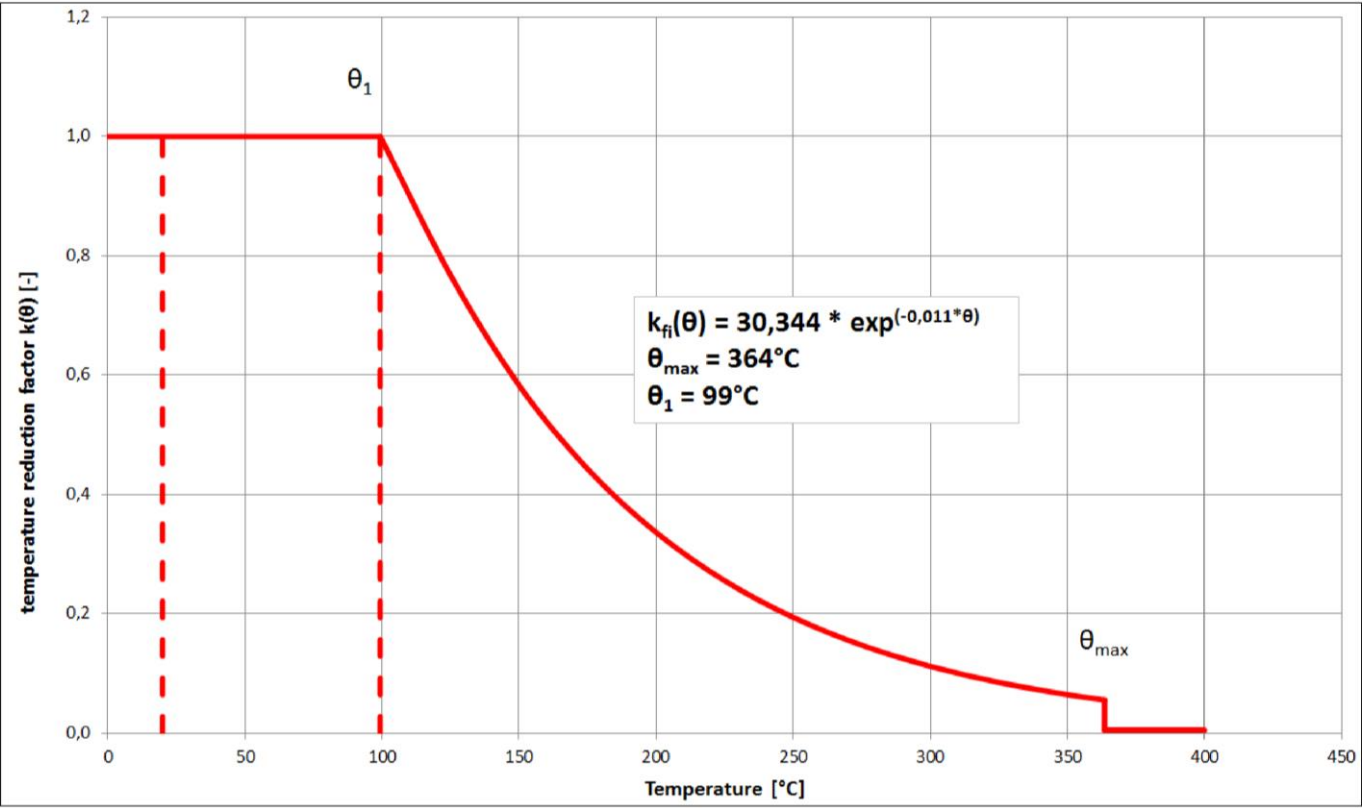

$k_{fi}(\theta) = a \cdot e^{(b \cdot \theta)}$  with  $a = 30,344$  and  $b = -0,011$   
 $k_{fi}(\theta) < 1$  for  $99^\circ\text{C} \leq \theta \leq 364^\circ\text{C}$   
 $k_{fi}(\theta) = 0$  for  $\theta > 364^\circ\text{C}$

Design value of the bond strength  $f_{bd,fi}$  under fire exposure

The design value of the bond strength  $f_{bd,fi}$  under fire exposure will be calculated by the following equation:

$$f_{bd,fi} = k_{fi}(\theta) \cdot f_{bd} \cdot \gamma_c / \gamma_{M,fi}$$

- with:
- $k_{fi}(\theta)$  ... Reduction factor under fire exposure
  - $f_{bd}$  ... Design value of the bond strength according to Table C2
  - $\gamma_c = 1,5$  ... recommended safety factor according to EN 1992-1-1
  - $\gamma_{M,fi}$  ... safety factor according to EN 1992-1-2 under fire exposure

Mungo Injection system MIT-Hybrid for rebar connection

Performances

Reduction factor  $k_{fi}(\theta)$  for design in case of fire

Annex C 2