

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

**ETA-17/0543**  
**of 7 September 2017**

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Trade name of the construction product

Product family  
to which the construction product belongs

Manufacturer

Manufacturing plant

This European Technical Assessment  
contains

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Deutsches Institut für Bautechnik

weberanc 505 ASF for rebar connection

Injection system for post-installed  
rebar connections

SODAMCO-WEBER (Saint-Gobain Middle East  
Holding s.a.l. previously Sodamco Holding s.a.l.)  
and its subsidiaries  
PO Box. 55-44 BEIRUT  
Libanon

Sodamco Weber Plant 1

17 pages including 3 annexes which form an integral part  
of this assessment

EAD 330087-00-0601

**European Technical Assessment**

**ETA-17/0543**

English translation prepared by DIBt

**Page 2 of 17 | 7 September 2017**

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The subject of this European Technical Assessment is the post-installed connection, by anchoring or overlap connection joint, of reinforcing bars (rebars) in existing structures made of normal weight concrete, using the "Pure epoxy anchoring resin in cartridge – weber.anc 505 ASF for rebar connection" in accordance with the regulations for reinforced concrete construction.

Reinforcing bars made of steel with a diameter  $\phi$  from 8 to 40 mm according to Annex A and injection mortar weber.anc 505 ASF are used for rebar connections. The rebar is placed into a drilled hole filled with injection mortar and is anchored via the bond between rebar, injection mortar and concrete.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the rebar connection of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Amplification factor $\alpha_{lb}$ , Bond resistance $f_{bd}$	See Annex C 1

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Rebar connections satisfy requirements for Class A1
Resistance to fire	See Annex C 2

### 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 330087-00-0601, the applicable European legal act is: [96/582/EC].

The system(s) to be applied is (are): 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 7 September 2017 by Deutsches Institut für Bautechnik


BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Baderschneider


**Figure A1:** Overlapping joint for rebar connections of slabs and beams

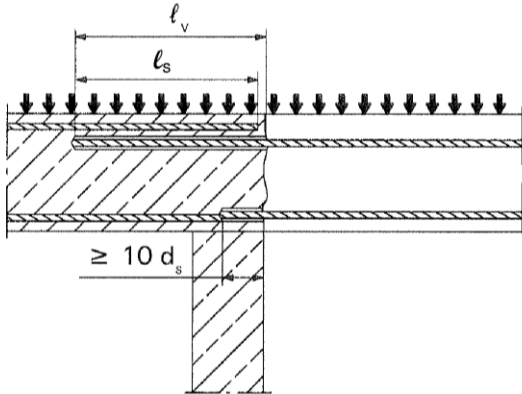


**Figure A3:** End anchoring of slabs or beams, designed as simply supported

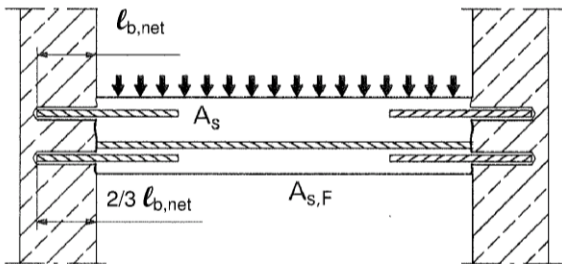


**Figure A5:** Anchoring of reinforcement to cover the line of acting tensile force

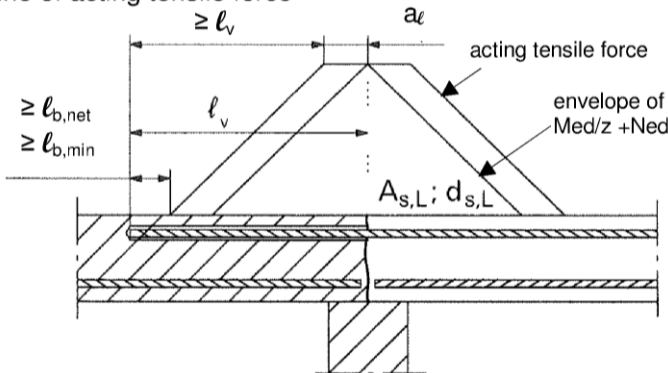

**Figure A2:** Overlapping joint at a foundation of a wall or column where the rebars are stressed in tension

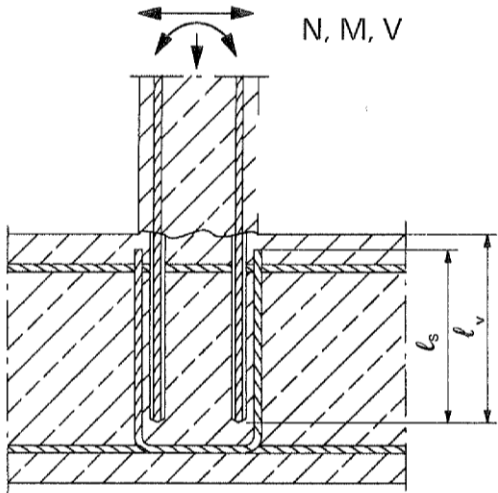

**Figure A4:** Rebar connection for components stressed primarily in compression. The rebars are stressed in compression

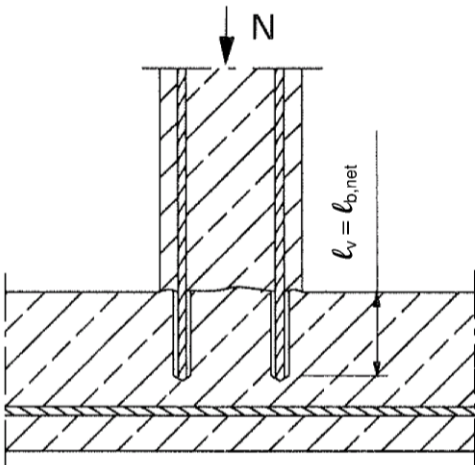

**Note to Figure A1 to A5:**

In the Figures no transverse reinforcement is plotted, the transverse reinforcement shall comply with EN 1992-1-1:2004+AC:2010.

Preparing of joints according to Annex B 2

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


**Product description**  
Installed condition and examples of use for rebars

**Annex A 1**

## Product description and intended use


### Injection mortar: weber.anc 505 ASF

Typ "side-by-side":  
385 ml, 585 ml, 1000 ml  
and 1400 ml

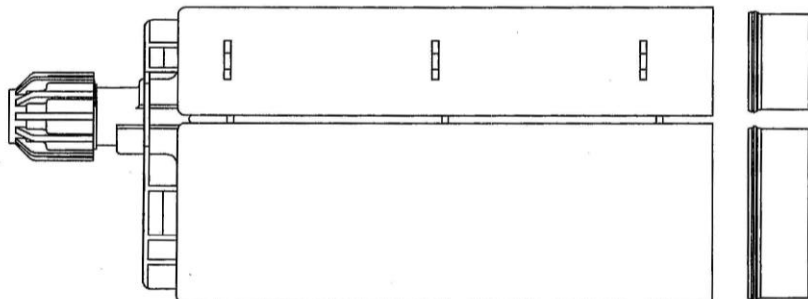


Label: weber.anc 505 ASF,  
processing notes, charge-code, shelf life, hazard-code, curing- and processing  
time (depending on the temperature), with as well as without travel scale

### Static Mixer



### Piston plug and mixer extension



## Reinforcing bar (rebar): ø8, ø10, ø12, ø14, ø16, ø20, ø22, ø24, ø25, ø28, ø32, ø34, ø36, ø40



Minimum value of related rip area  $f_{R,min}$  according to EN 1992-1-1:2004+AC:2010

- Rib height of the bar shall be in the range  $0,05d \leq h \leq 0,07d$   
(d: Nominal diameter of the bar; h: Rip height of the bar)

## Table A1: Materials

Designation	Material
Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C $f_{yk}$ and $k$ according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{tk} = f_{tk} = k \cdot f_{yk}$

## Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

### Product description

Injection mortar / Static mixer / Rebar  
Materials

## Annex A 2

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads.
- Fire exposure

### Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C12/15 to C50/60 according to EN 206-1:2000.
- Maximum chloride concrete of 0,40% (CL 0.40) related to the cement content according to EN 206-1:2000.
- Non-carbonated concrete.

Note: In case of a carbonated surface of the existing concrete structure the carbonated layer shall be removed in the area of the post-installed rebar connection with a diameter of  $\phi + 60$  mm prior to the installation of the new rebar.

The depth of concrete to be removed shall correspond to at least the minimum concrete cover in accordance with EN 1992-1-1:2004+AC:2010.

The foregoing may be neglected if building components are new and not carbonated and if building components are in dry conditions.

### Temperature Range:

- - 40°C to +80°C (max. short term temperature +80°C and max long term temperature +50°C).

### Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the forces to be transmitted.
- Design according to EN 1992-1-1:2004+AC:2010 and Annex B2.
- The actual position of the reinforcement in the existing structure shall be determined on the basis of the construction documentation and taken into account when designing.

### Installation:

- Dry or wet concrete.
- It must not be installed in flooded holes.
- Hole drilling by hammer drill (HD), compressed air drill (CD) or diamond drill mode (DD).
- The installation of post-installed rebar shall be done only by suitable trained installer and under supervision on site; the conditions under which an installer may be considered as suitable trained and the conditions for supervision on site are up to the Member States in which the installation is done.
- Check the position of the existing rebars (if the position of existing rebars is not known, it shall be determined using a rebar detector suitable for this purpose as well as on the basis of the construction documentation and then marked on the building component for the overlap joint).

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


Intended use  
Specifications

Annex B 1



**Figure B1:** General design rules of construction for post-installed in rebars

- Only tension forces in the axis of the rebar may be transmitted
- The transfer of shear forces between new concrete and existing structure shall be designed additionally according to EN 1992-1-1:2004+AC:2010.
- The joints for concreting must be roughened to at least such an extent that aggregate protrude.

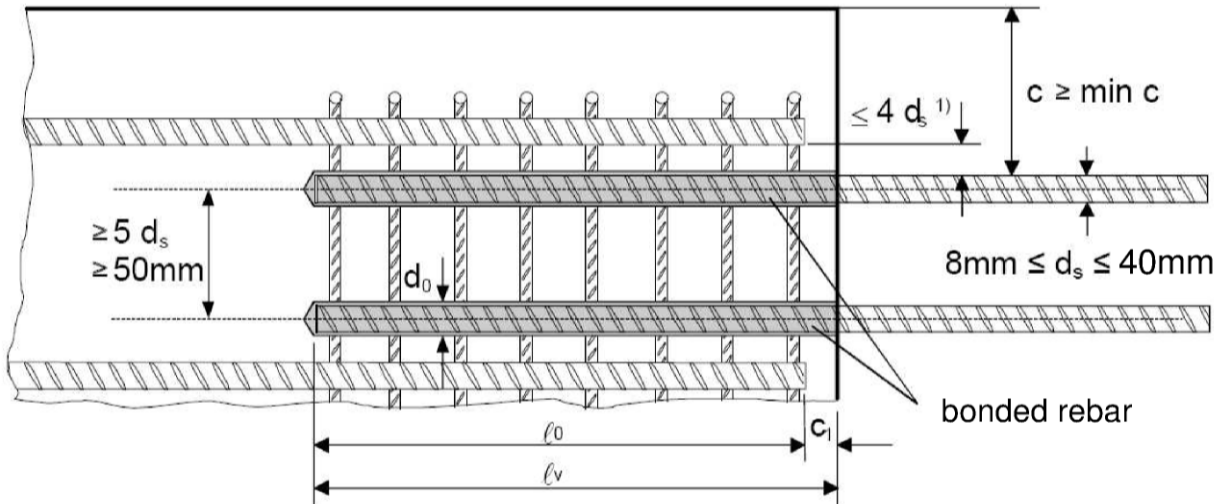

- 1) If the clear distance between lapped bars exceeds  $4d_s$ , then the lap length shall be increased by the difference between the clear bar distance and  $4d_s$ .

The following applies to Figure B1:

$c$	concrete cover of post-installed rebar
$c_1$	concrete cover at end-face of existing rebar
$\min c$	minimum concrete cover according to Table B1 and to EN 1992-1-1:2004+AC:2010, Section 4.4.1.2
$d_s$	diameter of post-installed rebar
$l_0$	lap length, according to EN 1992-1-1:2004+AC:2010, Section 8.7.3
$l_v$	effective embedment depth, $\geq l_0 + c_1$
$d_0$	nominal drill bit diameter, see Annex B 5

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


Intended use

General construction rules for post-installed rebars

Annex B 2



**Table B1:** Minimum concrete cover min c of bonded-in rebar depending of drilling method

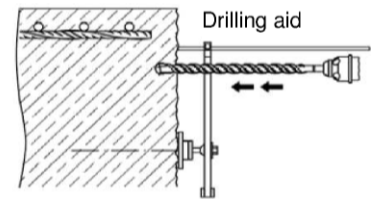

Drilling method	Rebar diameter	Without drilling aid	With drilling aid
Hammer drilling (HD)	< 25 mm	$30 \text{ mm} + 0,06 \cdot l_v \geq 2 d_s$	$30 \text{ mm} + 0,02 \cdot l_v \geq 2 d_s$
	$\geq 25 \text{ mm}$	$40 \text{ mm} + 0,06 \cdot l_v \geq 2 d_s$	$40 \text{ mm} + 0,02 \cdot l_v \geq 2 d_s$
Compressed air drilling (CD)	< 25 mm	$50 \text{ mm} + 0,08 \cdot l_v$	$50 \text{ mm} + 0,02 \cdot l_v$
	$\geq 25 \text{ mm}$	$60 \text{ mm} + 0,08 \cdot l_v$	$60 \text{ mm} + 0,02 \cdot l_v$
Diamond coring (DD)	< 25 mm	Drill stand used as drilling aid	$30 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$
	$\geq 25 \text{ mm}$		$40 \text{ mm} + 0,02 \cdot l_v \geq 2 \phi$

<sup>1)</sup> see Annexes B2, Figures B1

Comments: The minimum concrete cover acc. EN 1992-1-1:2004+AC:2010 must be observed

**Table B2:** Bore hole diameter and maximum embedment depth  $l_{\max}$

Bar size ϕ	Drill bit - Ø			Cartridge: side-by-side (385, 585, 1000, 1400 ml)	Cartridge: side-by-side (385, 585 ml)	Cartridge: side-by-side (1000, 1400 ml)
				Hand or battery tool	Pneumatic tool	Pneumatic tool
	HD	CD	DD	l <sub>v,max</sub>	l <sub>v,max</sub>	l <sub>v,max</sub>
(mm)	(mm)			(mm)	(mm)	(mm)
8	12	-	12	700	800	800
10	14	-	14		1000	1000
12	16				1200	1200
14	18				1500	1400
16	20				1500	1600
20	25	26	25	500	1000	2000
22	28				700	
24	32					
25	32					
28	35					
32	40			-	500	
34	40					
36	45					
40	55	55	52			

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

Intended use

Minimum concrete cover

Maximum embedment depth

**Annex B 3**





**Table B3:** Base material temperature, gelling time and curing time

Concrete temperature	Gelling- / working time <sup>1)</sup>	Minimum curing time in dry concrete <sup>2)</sup>
	$t_{gel}$	$t_{cure,dry}$
+5°C to +9°C	120 min	50 h
+10°C to +19°C	90 min	30 h
+20°C to +29°C	30 min	10 h
+30°C to +39°C	20 min	6 h
+40 °C	12 min	4 h

<sup>1)</sup>  $t_{gel}$ : maximum time from starting of mortar injection to completing of rebar setting.

<sup>2)</sup> In wet concrete the curing time  $t_{cure,dry}$  has to be doubled up

**Table B4:** Dispensing tools

Cartridge type/size	Hand tool	Pneumatic tool
Side-by-side cartridges 385, 585 ml	 e.g. SA 296C585	 e.g. Type TS 444 KX
Side-by-side cartridge 1000 ml	-	 e.g. Type TS 4104
Side-by-side cartridge 1400 ml	-	 e.g. Type TS 471

All cartridges could also be extruded by a battery tool.

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


**Intended Use**  
working time and curing times  
Dispensing tools

**Annex B 4**

**Table B5: Installation tools**

Bar size $\phi$	Drill and clean					Installation		
	Drill bit - $\phi$			Brush	min Brush - $\phi$	Air Nozzle	Piston plug	Mixer extension
	HD	PD	DD		$d_{b,min}$			
[mm]	[mm]			RB	[mm]	AN	VS	VL
8	12	-	12	14	12,5	10	-	VL 10/0,75 or VL 16/1,8
10	14	-	14	16	14,5		14	
12	16			18	16,5	14	16	
14	18			20	18,5		18	
16	20			22	20,5	17	20	
20	25	-	25	27	25,5		25	
	-	26	-	27	26,5	27	25	
22	28			30	28,5		28	
24	32			34	32,5		32	
25	32			34	32,5		32	
28	35			37	35,5		35	
32	40			42	40,5		40	
34	40			42	40,5		40	
36	45			47	45,5	40	45	
40	-	-	52	54	52,5		52	
	55	55	-	58	55,5		55	

Brush RB:

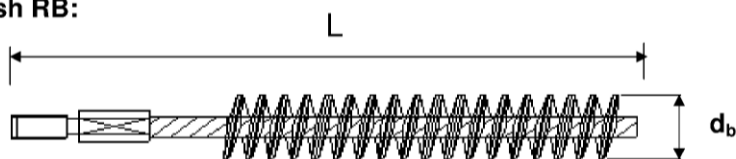

SDS Plus Adapter:




Rec. compressed air tool  
hand slide valve (min 6 bar)



Hand pump (volume 750 ml)



Air nozzle AN:



Brush extension:





Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

Intended use  
Installation tools

**Annex B 5**

## A) Bore hole drilling




1. Drill a hole into the base material to the size and embedment depth required by the selected reinforcing bar with carbide hammer drill (HD), a compressed air drill (CD) or diamond core (DD). In case of aborted drill hole: the drill hole shall be filled with mortar. Drill bit sizes see Table B5.



Hammer drilling (HD)




Compressed air drilling (CD)




Diamond coring (DD)

## B1) Bore hole cleaning (HD and CD)

**Attention! Standing water in the bore hole must be removed before cleaning.**




or




- 2a. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) or a hand pump a minimum of two times. If the bore hole ground is not reached an extension shall be used.


For bore holes deeper than 240 mm, compressed air (min. 6 bar **must** be used. For bore holes larger than 32 mm, compressed air (min. 6 bar) and the appropriate air nozzle (see Table B5) **must** be used.



- 2b. Check brush diameter (Table B5) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (Table B5) a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used.



or



- 2c. Finally blow the hole clean again with compressed air (min. 6 bar) or a hand pump a minimum of two times. If the bore hole ground is not reached an extension shall be used.

For bore holes deeper than 240 mm, compressed air (min. 6 bar **must** be used. For bore holes larger than 32 mm, compressed air (min. 6 bar) and the appropriate air nozzle (see Table B5) **must** be used.

**After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**


Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

### Intended Use


Installation instruction: Bore hole drilling and  
Bore hole cleaning

## Annex B 6


## B2) Bore hole cleaning (DD)



2a. Rinsing with water until clear water comes out.




2b. Check brush diameter acc. Table B5 and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (Table B5) a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used (Table B5).




2c. Rinsing again with water until clear water comes out.


**Attention! Standing water in the bore hole must be removed before cleaning.**



2d. Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) with the appropriate air nozzle (see Table B5) a minimum of two times. If the bore hole ground is not reached an extension shall be used.



2e. Check brush diameter (Table B5) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (Table B5) a minimum of two times. If the bore hole ground is not reached with the brush, a brush extension shall be used.



2f. Finally blow the hole clean again with compressed air (min. 6 bar) with the appropriate air nozzle (see Table B5) a minimum of two times. If the bore hole ground is not reached an extension shall be used.

**After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.**

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


### Intended Use

Installation instruction: Bore hole cleaning (DD)


**Annex B 7**




### C) Preparation of bar and cartridge



3. Attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.  
For every working interruption longer than the recommended working time (Table B3) as well as for every new cartridges, a new static-mixer shall be used.




4. Prior to inserting the reinforcing bar into the filled bore hole, the position of the embedment depth shall be marked (e.g. with tape) on the reinforcing bar and insert bar in empty hole to verify hole and depth  $\ell_v$ .  
The anchor should be free of dirt, grease, oil or other foreign material.




5. Prior to dispensing into the anchor hole, squeeze out separately the mortar until it shows a consistent grey colour, but a minimum of three full strokes, and discard non-uniformly mixed adhesive components.

### D) Filling the bore hole




6. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. For embedment larger than 190 mm an extension nozzle shall be used.



For overhead and horizontal installation and bore holes deeper than 240 mm a piston plug and the appropriate mixer extension must be used.

Observe the gel-/ working times given in Table B3.

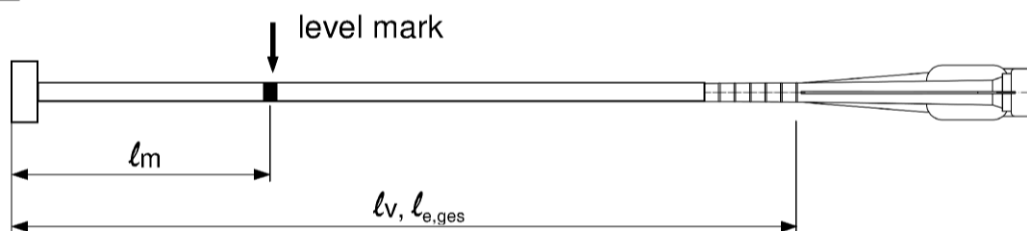

Injection tool must be marked by mortar level mark  $\ell_m$  and anchorage depth  $\ell_v$  resp.  $\ell_{e,ges}$  with tape or marker.

Quick estimation:  $\ell_m = 1/3 \cdot \ell_v$

Continue injection until the mortar level mark  $\ell_m$  becomes visible.

Optimum mortar volume:  $\ell_m = \ell_v$  resp.  $\ell_{e,ges} \cdot \left( 1,2 \cdot \frac{d_s^2}{d_0^2} - 0,2 \right)$  [mm]

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection


#### Intended Use

Preparation of bar and cartridge  
Filling the bore hole

Annex B 8




## E) Inserting the rebar




7. Push the reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

The bar should be free of dirt, grease, oil or other foreign material.



8. Be sure that the bar is inserted in the bore hole until the embedment mark is at the concrete surface and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed. For overhead installation fix embedded part (e.g. wedges).



9. Observe gelling time  $t_{gel}$ . Attend that the gelling time can vary according to the base material temperature (see Table B3). It is not allowed to move the bar after gelling time  $t_{gel}$  has elapsed.  
Allow the adhesive to cure to the specified time prior to applying any load. Do not move or load the bar until it is fully cured (attend Table B3). After full curing time  $t_{cure}$  has elapsed, the add-on part can be installed.

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

### Intended Use

Installation instruction: Inserting rebar

Annex B 9

## Minimum anchorage length and minimum lap length

The minimum anchorage length  $\ell_{b,min}$  and the minimum lap length  $\ell_{0,min}$  according to EN 1992-1-1:2004+AC:2010 ( $\ell_{b,min}$  acc. to Eq. 8.6 and Eq. 8.7 and  $\ell_{0,min}$  acc. to Eq. 8.11) shall be multiply by the amplification factor  $\alpha_{lb}$  according to Table C1.

**Table C1: Amplification factor  $\alpha_{lb}$  related to concrete class and drilling method**

Concrete class	Drilling method	Bar size	Amplification factor $\alpha_{lb}$
C12/15 to C50/60	Hammer drilling (HD) and compressed air drilling (CD)	8 mm to 32 mm	1,0
	Hammer drilling (HD) and compressed air drilling (CD)	> 32 mm	1,5
	Diamond coring (DD)	8 mm to 40 mm	1,5

**Table C2: Design values of the ultimate bond resistance  $f_{bd}$  in N/mm<sup>2</sup> for hammer (HD) and compressed air drilling (CD) methods for good conditions**

according to EN 1992-1-1:2004+AC:2010 for good bond conditions  
(for all other bond conditions multiply the values by 0.7)

Rebar - Ø	Concrete class								
$d_s$	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 32 mm	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
34 mm	1,6	2,0	2,3	2,6	2,9	3,3	3,6	3,9	4,2
36 mm	1,5	1,9	2,2	2,6	2,9	3,3	3,6	3,8	4,1
40 mm	1,5	1,8	2,1	2,5	2,8	3,1	3,4	3,7	4,0

**Table C3: Design values of the ultimate bond resistance  $f_{bd}$  in N/mm<sup>2</sup> for Diamond coring (DD) method for good conditions**

according to EN 1992-1-1:2004+AC:2010 for good bond conditions  
(for all other bond conditions multiply the values by 0.7)

Rebar - Ø	Concrete class								
$d_s$	C12/15	C16/20	C20/25	C25/30	C30/37	C35/45	C40/50	C45/55	C50/60
8 to 28 mm	1,6	2,0	2,3	2,7	3,0	3,4	3,7	4,0	4,3
32 mm	1,6	2,0	2,3	2,7					
34 mm	1,6	2,0	2,3	2,6					
36 mm	1,5	1,9	2,2	2,6					
40 mm	1,5	1,8	2,1	2,5					

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

### Performances

Amplification factor

Design values of ultimate bond resistance  $f_{bd}$

**Annex C 1**

**Design value of the ultimate bond stress  $f_{bd,fi}$  under fire exposure for concrete classes C12/15 to C50/60, (all drilling methods):**

The design value of the bond strength  $f_{bd,fi}$  under fire exposure has to be calculated by the following equation:


$$f_{bd,fi} = k_{b,fi}(\theta) \cdot f_{bd} \cdot \gamma_c / \gamma_{M,fi}$$

with:  $\theta \leq 270^\circ\text{C}$ :  $k_{b,fi}(\theta) = 9221,2 \cdot \theta^{-1,747} / (f_{bd} \cdot 4,3) \leq 1,0$   
 $\theta > 270^\circ\text{C}$ :  $k_{b,fi}(\theta) = 0$

- $f_{bd,fi}$  Design value of the ultimate bond stress in case of fire in N/mm<sup>2</sup>
- $\theta$  Temperature in °C in the mortar layer.
- $k_{b,fi}(\theta)$  Reduction factor under fire exposure.
- $f_{bd}$  Design value of the ultimate bond stress in N/mm<sup>2</sup> in cold condition according to Table C2 or C3 considering the concrete classes, the rebar diameter, the drilling method and the bond conditions according to EN 1992-1-1.
- $\gamma_c$  partially safety factor according to EN 1992-1-1
- $\gamma_{M,fi}$  partially safety factor according to EN 1992-1-2

For evidence under fire exposure the anchorage length shall be calculated according to EN 1992-1-1:2004+AC:2010 Equation 8.3 using the temperature-dependent ultimate bond stress  $f_{bd,fi}$ .

**Example graph of Reduction factor  $k_{b,fi}(\theta)$  for concrete classes C20/25 for good bond conditions:**

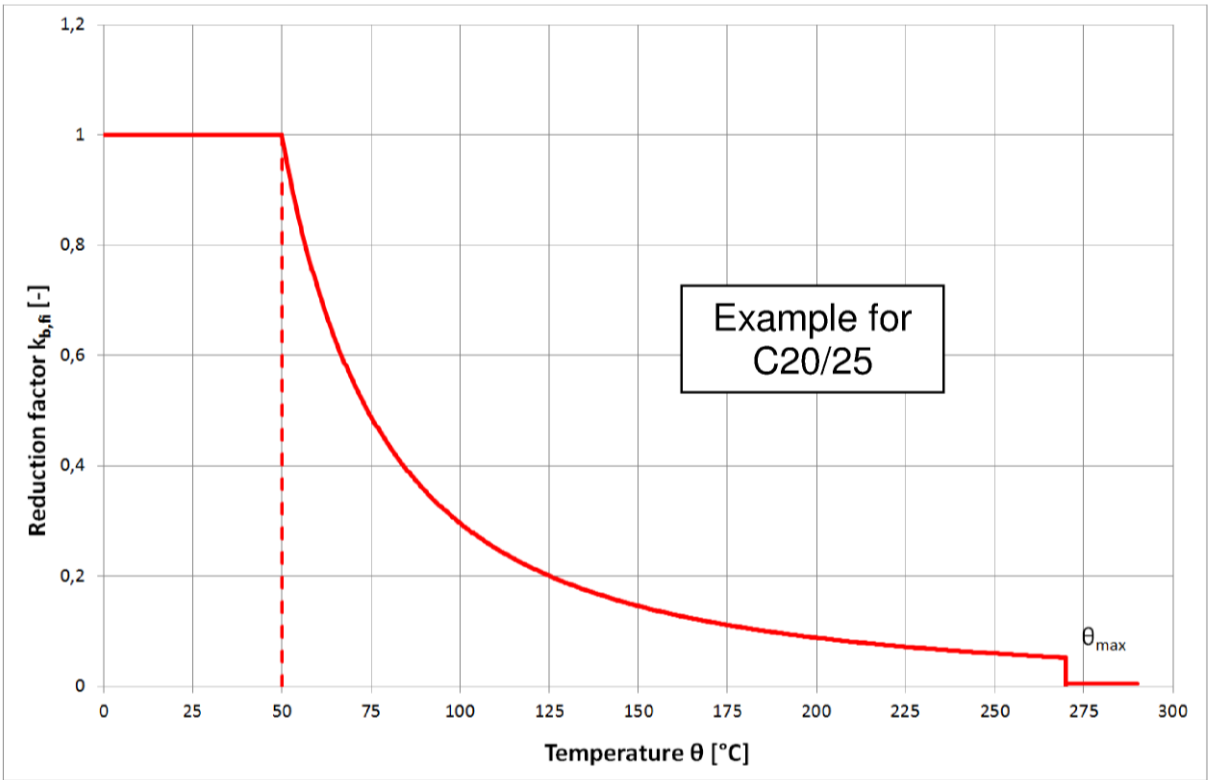

Pure epoxy anchoring resin in cartridge - weberanc 505 ASF for rebar connection

**Performance**  
Design value of bond strength  $f_{bd,fi}$  under fire exposure

**Annex C 2**