

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-18/0487
of 4 July 2018

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

PRO-DOMA Injection system vinylester

Product family
to which the construction product belongs

Bonded fastener for use in concrete

Manufacturer

PRO-DOMA, SE
Budcická 1479
190 00 PRAHA 9 - Újezd nad Lesy
TSCHECHISCHE REPUBLIK

Manufacturing plant

PRO-DOMA, SE

This European Technical Assessment
contains

21 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 330499-00-0601

European Technical Assessment

ETA-18/0487

English translation prepared by DIBt

Page 2 of 21 | 4 July 2018

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The PRO-DOMA injection system vinylester is a bonded anchor consisting of a cartridge with injection mortar Kotva chemická vinylester PRO-DOMA, Kotva chemická vinylester PRO-DOMA High Speed or Kotva chemická vinylester PRO-DOMA Low Speed and a steel element.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex C 1 to C 5
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 to C 3
Displacements (static and quasi-static loading)	See Annex C 6
Characteristic resistance and displacements for seismic performance categories C1 and C2	No performance assessed

3.2 Hygiene, health and the environment (BWR 3)

Essential characteristic	Performance
Content, emission and/or release of dangerous substances	No performance assessed

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with the European Assessment Document EAD 330499-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

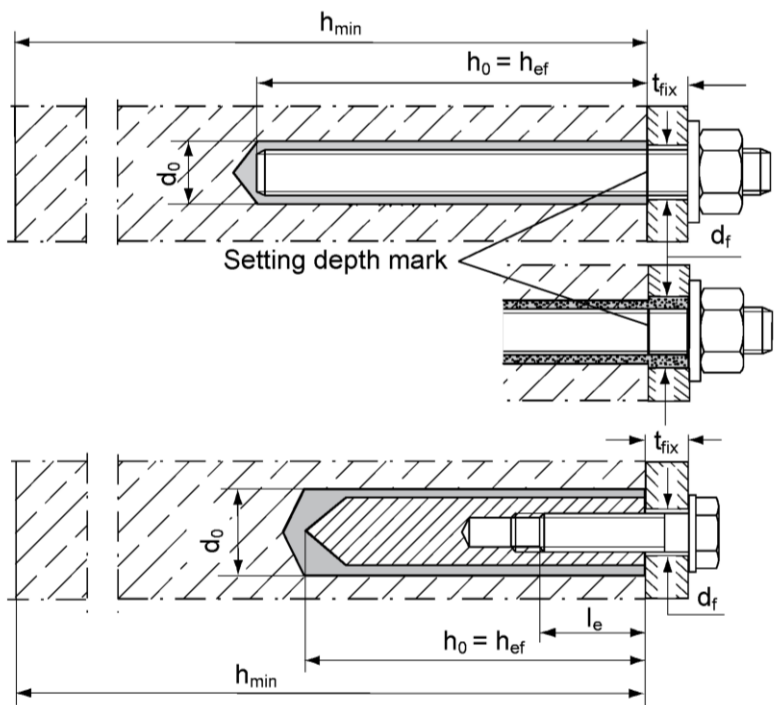
Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 4 July 2018 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow
Head of Department

beglaubigt:
Baderschneider

Installation conditions



Anchor rod
Pre-positioned anchor

Anchor rod
Push through anchor
(annular gap filled with mortar)

fischer
internal threaded anchor RG MI
Pre-positioned anchor only

PRO-DOMA injection system vinylyster

Product description
Installation conditions

Annex A 1

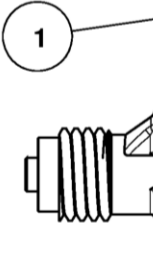
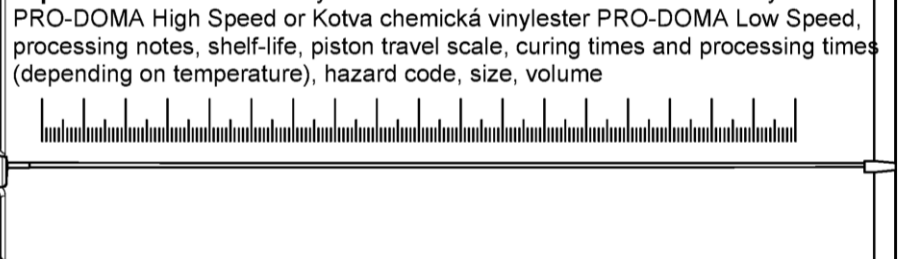

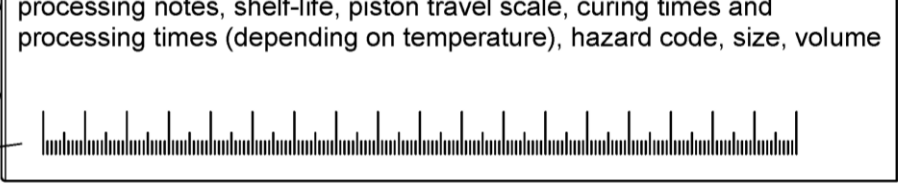








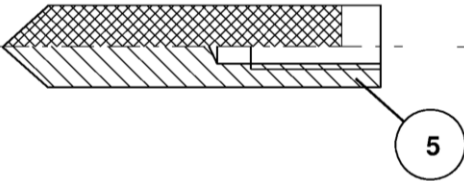








<p>Shuttle cartridge sizes (345 ml, 360 ml, 390 ml, 550 ml, 950 ml, 1100 ml, 1500 ml)</p> <p>Imprint: Kotva chemická vinylester PRO-DOMA or Kotva chemická vinylester PRO-DOMA High Speed or Kotva chemická vinylester PRO-DOMA Low Speed, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume</p>  	
<p>Coaxial cartridge sizes (100 ml, 150 ml, 300 ml, 380 ml, 400 ml, 410 ml)</p> <p>Imprint: Kotva chemická vinylester PRO-DOMA or Kotva chemická vinylester PRO-DOMA High Speed or Kotva chemická vinylester PRO-DOMA Low Speed, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume</p>  	
<p>Sealing cap</p>  	
<p>Static mixer FIS MR Plus</p> 	
<p>Extension tube</p> 	
<p>Injection-adapter</p> 	
<p>Anchor rod Size: M6, M8, M10, M12, M16, M20, M24, M27, M30</p> 	<p>Washer </p> <p>Hexagon nut </p>
<p>fischer internal threaded anchor RG MI Size: M8, M10, M12, M16, M20</p> 	<p>Screw </p> <p>Threaded rod </p> <p>Washer </p> <p>Hexagon nut </p>
<p>PRO-DOMA injection system vinylester</p>	
<p>Product description Cartridges / Static mixer / Steel elements</p>	<p>Annex A 2</p>

Table A1: Materials

Part	Designation	Material		
1	Mortar cartridge	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8 \%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8 \%$ fracture elongation	Property class 50 or 80 EN ISO 3506-1:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8 \%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578;1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565;1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
5	fischer internal threaded anchor RG MI	Property class 5.8 ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
6	Commercial standard screw or anchor / threaded rod for fischer internal threaded anchor RG MI	Property class 5.8 or 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$, ISO 4042:1999 A2K fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 fracture elongation $A_5 > 8 \%$
PRO-DOMA injection system vinlyester				Annex A 3
Product description Materials				

Specifications of intended use (part 1)

Table B1: Overview use and performance categories

Anchorage subject to		Kotva chemická vinylester PRO-DOMA, Kotva chemická vinylester PRO-DOMA High Speed or Kotva chemická vinylester PRO-DOMA Low Speed with...			
		Anchor rod 		fischer internal threaded anchor RG MI 	
Hammer drilling with standard drill bit 		all sizes			
Hammer drilling with hollow drill bit (Heller "Duster Expert" or Hilti "TE-CD, TE-YD") 		Nominal drill bit diameter (d ₀) 12 mm to 35 mm			
Static and quasi static load, in	uncracked concrete	M6 to M30	Tables: C1, C3, C4, C6	M8 to M20	Tables: C2, C3, C5, C7
	cracked concrete	M10 to M20		not assessed	
Use category	dry or wet concrete	M6 to M30		M8 to M20	
	flooded hole ¹⁾	M12 to M30		M8 to M20	
Installation temperature		0 °C to +40 °C			
In-service temperature	Temperature range I	-40 °C to +80 °C (max. long term temperature +50 °C and max. short term temperature +80 °C)			
	Temperature range II	-40 °C to +120 °C (max. long term temperature +72 °C and max. short term temperature +120 °C)			
¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml					
PRO-DOMA injection system vinlyester					Annex B 1
Intended Use Specifications (part 1)					

Specifications of intended use (part 2)

Base materials:

- Reinforced or unreinforced normal weight concrete without fibres Strength classes C20/25 to C50/60 according to EN 206:2013

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e. g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e. g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorage have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorage under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4: 2009

Installation:

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Effective embedment depth should be marked and adhered to on installation
- Overhead installation is allowed

PRO-DOMA injection system vinlyester

Intended Use
Specifications (part 2)

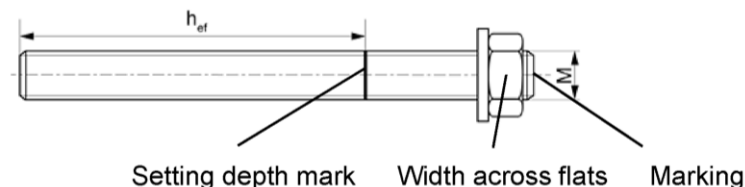
Annex B 2

Table B2: Installation parameters for anchor rods


Size		M6	M8	M10	M12	M16	M20	M24	M27	M30
Width across flats	SW	10	13	17	19	24	30	36	41	46
Nominal drill bit diameter	d_0	8	10	12	14	18	24	28	30	35
Drill hole depth	h_0	$h_0 = h_{ef}$								
Effective embedment depth	$h_{ef,min}$	50	60	60	70	80	90	96	108	120
	$h_{ef,max}$	72	160	200	240	320	400	480	540	600
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$	40	40	45	55	65	85	105	125	140
Diameter of clearance hole in the fixture	pre-positioned anchorage d_f	7	9	12	14	18	22	26	30	33
	push through anchorage d_f	9	11	14	16	20	26	30	32	40
Minimum thickness of concrete member	h_{min}	$h_{ef} + 30$ (≥ 100)				$h_{ef} + 2d_0$				
Maximum installation torque	$T_{inst,max}$ [Nm]	5	10	20	40	60	120	150	200	300

Anchor rods:

fischer FIS A



fischer RG M



Marking (on random place) fischer anchor rod:

Property class 8.8, stainless steel A4 property class 80 and high corrosion resistant steel C property class 80: •

Stainless steel A4 property class 50 and high corrosion resistant steel C property class 50: ••

Or colour coding according to DIN 976-1

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Setting depth is marked

PRO-DOMA injection system vinlyester

Intended Use

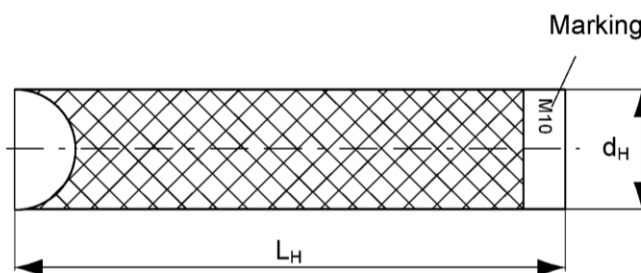
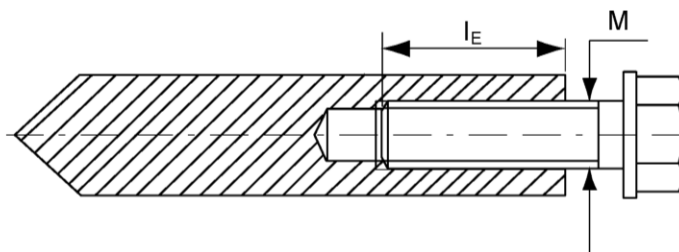
Installation parameters anchor rods

Annex B 3

Table B3: Installation parameters for fischer internal threaded anchors RG MI

Size		M8	M10	M12	M16	M20
Diameter of anchor	d_H	12	16	18	22	28
Nominal drill bit diameter	d_0	14	18	20	24	32
Drill hole depth	h_0	$h_0 = h_{ef} = L_H$				
Effective embedment depth ($h_{ef} = L_H$)	h_{ef}	90	90	125	160	200
Minimum spacing and minimum edge distance	s_{min} = c_{min}	55	65	75	95	125
Diameter of clearance hole in the fixture	d_f	9	12	14	18	22
Minimum thickness of concrete member	h_{min}	120	125	165	205	260
Maximum screw-in depth	$l_{E,max}$	18	23	26	35	45
Minimum screw-in depth	$l_{E,min}$	8	10	12	16	20
Maximum installation torque	$T_{inst,max}$ [Nm]	10	20	40	80	120

fischer internal threaded anchor RG MI



Marking: Anchor size
e. g.: **M10**

Stainless steel additional **A4**
e. g.: **M10 A4**

High corrosion resistant steel
additional **C**
e. g.: **M10 C**

Retaining bolt or threaded rods (including nut and washer) must comply with the appropriate material and strength class of Annex A 3, Table A1

PRO-DOMA injection system vinlyester

Intended Use

Installation parameters fischer internal threaded anchors RG MI

Annex B 4

Table B4: Diameters of cleaning brush BS (steel brush)

The size of the steel brush refers to the nominal drill bit diameter

Nominal drill bit diameter d_0		8	10	12	14	16	18	20	24	25	28	30	35
Steel brush diameter d_b	[mm]	9	11	14	16	20		25	26	27	30	40	

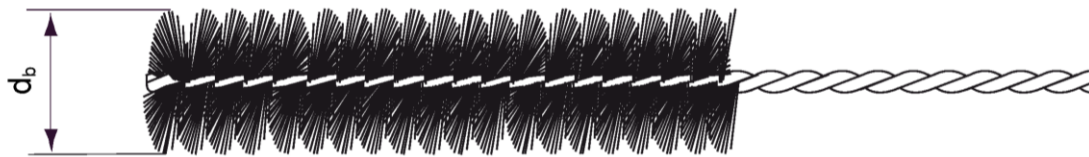


Table B5: Maximum processing time of the mortar and minimum curing time

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

System temperature [°C]	Maximum processing time t_{work}			Minimum curing time ¹⁾ t_{cure}		
	Kotva chemická vinylester PRO-DOMA High Speed	Kotva chemická vinylester PRO-DOMA	Kotva chemická vinylester PRO-DOMA Low Speed	Kotva chemická vinylester PRO-DOMA High Speed	Kotva chemická vinylester PRO-DOMA	Kotva chemická vinylester PRO-DOMA Low Speed
±0	5 min	---	---	3 h	24 h	---
> ±0 to +5	5 min	13 min	---	3 h	3 h	6 h
> +5 to +10	3 min	9 min	20 min	50 min	90 min	3 h
> +10 to +20	1 min	5 min	10 min	30 min	60 min	2 h
> +20 to +30	---	4 min	6 min	---	45 min	60 min
> +30 to +40	---	2 min	4 min	---	35 min	30 min

¹⁾ In wet concrete or flooded holes the curing times must be doubled

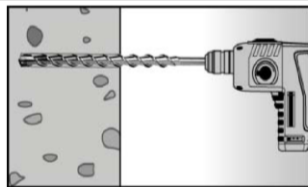
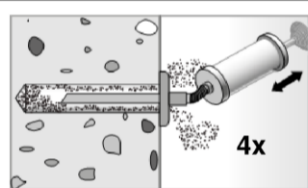
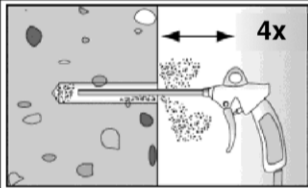
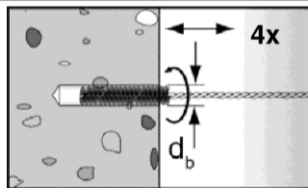
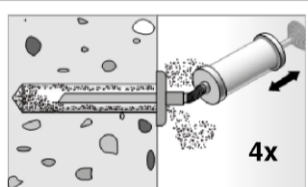
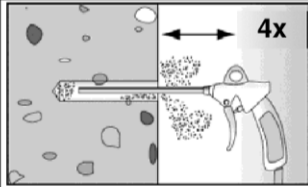
PRO-DOMA injection system vinylester

Intended Use
Cleaning tools
Processing times and curing times

Annex B 5


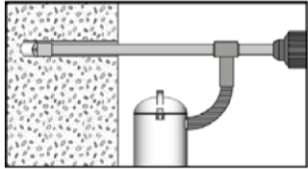
Installation instructions part 1

Drilling and cleaning the hole (hammer drilling with standard drill bit)

1		Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Tables B2, B3		
2		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand		For $h_{ef} > 12d$ and / or $d_0 \geq 18$ mm blow out the hole four times with oil-free compressed air ($p \geq 6$ bar)
3		Brush the drill hole four times. For deep holes use an extension. Corresponding brushes see Table B4		
4		Clean the drill hole: For $h_{ef} \leq 12d$ and $d_0 < 18$ mm blow out the hole four times by hand		For $h_{ef} > 12d$ and / or $d_0 \geq 18$ mm blow out the hole four times with oil-free compressed air ($p \geq 6$ bar)

Go to step 5

Drilling and cleaning the hole (hammer drilling with hollow drill bit)

1		Check a suitable hollow drill (see Table B1) for correct operation of the dust extraction	
2		Use a suitable dust extraction system, e. g. Bosch GAS 35 M AFC or a comparable dust extraction system with equivalent performance data Drill the hole with hollow drill bit. The dust extraction system has to extract the drill dust nonstop during the drilling process and must be adjusted to maximum power. Diameter of drill hole d_0 and drill hole depth h_0 see Tables B2, B3	

Go to step 5

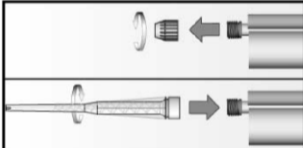


PRO-DOMA injection system vinlyester

Intended use
Installation instructions part 1

Annex B 6

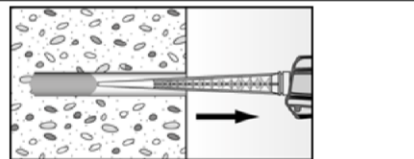
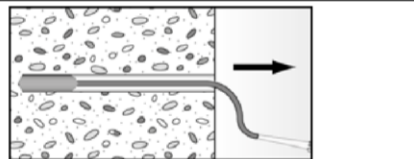
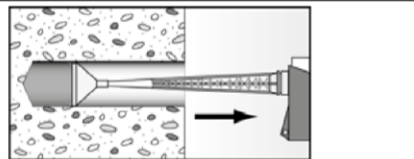
Installation instructions part 2

Preparing the cartridge

5		<p>Remove the sealing cap</p> <p>Screw on the static mixer (the spiral in the static mixer must be clearly visible)</p>
6		<p>Place the cartridge into the dispenser</p>
7		<p>Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey</p>

Go to step 8

Mörtelinjektion

8	 <p>Fill approximately 2/3 of the drill hole with mortar. Always begin from the bottom of the hole and avoid bubbles</p>	 <p>For drill hole depth ≥ 150 mm use an extension tube</p>	 <p>For overhead installation, deep holes ($h_0 > 250$ mm) or drill hole diameter ($d_0 \geq 40$ mm) use an injection-adapter</p>
---	--	--	--

Go to step 9

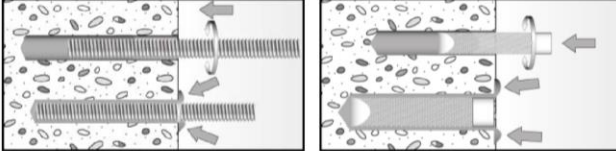

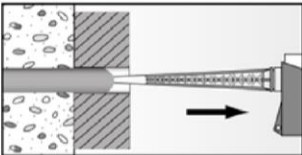

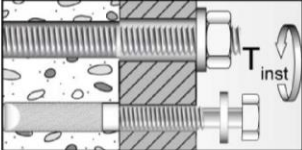
PRO-DOMA injection system vinlyester

Intended use
Installation instructions part 2

Annex B 7

Installation instructions part 3

Installation of anchor rods or fischer internal threaded anchors RG MI

9		<p>Only use clean and oil-free anchor elements. Mark the setting depth of the anchor. Push the anchor rod or fischer internal threaded RG MI anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must be emerged around the anchor element.</p>
	 <p>For overhead installations support the anchor rod with wedges. (e. g. fischer centering wedges)</p>	 <p>For push through installation fill the annular gap with mortar</p>
10	 <p>Wait for the specified curing time t_{cure} see Table B5</p>	<p>11</p>  <p>Mounting the fixture $T_{\text{inst,max}}$ see Tables B2 and B3</p>

PRO-DOMA injection system vinlyester

Intended use
Installation instructions part 3

Annex B 8

Table C1: Characteristic values for the steel bearing capacity of anchor rods under tensile / shear load

Size				M6	M8	M10	M12	M16	M20	M24	M27	M30
Bearing capacity under tensile load, steel failure												
Charact.bearing capacity $N_{Rk,s}$	Steel zinc plated	5.8	[kN]	10	19	29	43	79	123	177	230	281
		8.8		16	29	47	68	126	196	282	368	449
	Stainless steel A4 and High corrosion resistant steel C	50		10	19	29	43	79	123	177	230	281
		70		14	26	41	59	110	172	247	322	393
		80		16	30	47	68	126	196	282	368	449
Partial factors ¹⁾												
Partial factor $\gamma_{Ms,N}$	Steel zinc plated	5.8	[-]	1,50								
		8.8		1,50								
	Stainless steel A4 and High corrosion resistant steel C	50		2,86								
		70		1,50 ²⁾ / 1,87								
		80		1,60								
Bearing capacity under shear load, steel failure												
without lever arm												
Charact.bearing capacity $V_{Rk,s}^0$	Steel zinc plated	5.8	[kN]	5	9	15	21	39	61	89	115	141
		8.8		8	15	23	34	63	98	141	184	225
	Stainless steel A4 and High corrosion resistant steel C	50		5	9	15	21	39	61	89	115	141
		70		7	13	20	30	55	86	124	161	197
		80		8	15	23	34	63	98	141	184	225
Ductility factor		k_7	[-]	1,0								
with lever arm												
Charact. bending moment $M_{Rk,s}^0$	Steel zinc plated	5.8	[Nm]	7	19	37	65	166	324	560	833	1123
		8.8		12	30	60	105	266	519	896	1333	1797
	Stainless steel A4 and High corrosion resistant steel C	50		7	19	37	65	166	324	560	833	1123
		70		10	26	52	92	232	454	784	1167	1573
		80		12	30	60	105	266	519	896	1333	1797
Partial factors ¹⁾												
Partial factor $\gamma_{Ms,V}$	Steel zinc plated	5.8	[-]	1,25								
		8.8		1,25								
	Stainless steel A4 and High corrosion resistant steel C	50		2,38								
		70		1,25 ²⁾ / 1,56								
		80		1,33								
¹⁾ In absence of other national regulations												
²⁾ Only for fischer FIS A and RG M made of high corrosion-resistant steel C												
PRO-DOMA injection system vinlyester									Annex C 1			
Performances Characteristic steel bearing capacity anchor rods												

Table C2: Characteristic values for the steel bearing capacity of fischer internal threaded anchors RG MI under tensile / shear load

Size				M8	M10	M12	M16	M20	
Bearing capacity under tensile load, steel failure									
Characteristic bearing capacity with screw	N _{Rk,s}	Property class	5.8	[kN]	19	29	43	79	123
			8.8		29	47	68	108	179
		Property class 70	A4		26	41	59	110	172
			C		26	41	59	110	172
Partial factors ¹⁾									
Partial factor	γ _{Ms,N}	Property class	5.8	[-]	1,50				
			8.8		1,50				
		Property class 70	A4		1,87				
			C		1,87				
Bearing capacity under shear load, steel failure									
without lever arm									
Characteristic bearing capacity with screw	V ⁰ _{Rk,s}	Property class	5.8	[kN]	9,2	14,5	21,1	39,2	62,0
			8.8		14,6	23,2	33,7	54,0	90,0
		Property class 70	A4		12,8	20,3	29,5	54,8	86,0
			C		12,8	20,3	29,5	54,8	86,0
Ductility factor			k ₇	[-]	1,0				
with lever arm									
Characteristic bending moment with screw	M ⁰ _{Rk,s}	Property class	5.8	[Nm]	20	39	68	173	337
			8.8		30	60	105	266	519
		Property class 70	A4		26	52	92	232	454
			C		26	52	92	232	454
Partial factors ¹⁾									
Partial factor	γ _{Ms,V}	Property class	5.8	[-]	1,25				
			8.8		1,25				
		Property class 70	A4		1,56				
			C		1,56				
¹⁾ In absence of other national regulations									
PRO-DOMA injection system vinlyester							Annex C 2		
Performances Characteristic steel bearing capacity of fischer internal threaded anchors RG MI									

Table C3: General design factors for the bearing capacity under tensile / shear load; uncracked or cracked concrete

Size				All sizes								
Bearing capacity under tensile load												
Factors for the compressive strength of concrete > C20/25												
Increasing factor for τ_{RK}	C25/30	Ψ_c	[-]	1,05								
	C30/37			1,10								
	C35/45			1,15								
	C40/50			1,19								
	C45/55			1,22								
	C50/60			1,26								
Splitting failure												
Edge distance	$h / h_{ef} \geq 2,0$	$c_{cr,sp}$	[mm]	1,0 h_{ef}								
	$2,0 > h / h_{ef} > 1,3$			4,6 h_{ef} - 1,8 h								
	$h / h_{ef} \leq 1,3$			2,26 h_{ef}								
Spacing		$s_{cr,sp}$		2 $c_{cr,sp}$								
Concrete cone failure												
Uncracked concrete	$k_{ucr,N}$	[-]		11,0								
Cracked concrete	$k_{cr,N}$			7,7								
Edge distance	$c_{cr,N}$	[mm]		1,5 h_{ef}								
Spacing	$s_{cr,N}$			2 $c_{cr,N}$								
Bearing capacity under shear load												
Installation factors												
All installation conditions		γ_{inst}	[-]	1,0								
Concrete pry-out failure												
Factor		k_8	[-]	2,0								
Concrete edge failure												
The value of h_{ef} (= l_f) under shear load			[mm]	min (h_{ef} ; 8d)								
Calculation diameters												
Size				M6	M8	M10	M12	M16	M20	M24	M27	M30
Anchor rods		d	[mm]	6	8	10	12	16	20	24	27	30
fischer internal threaded anchors RG MI		d_{nom}		---	12	16	18	22	28	---	---	---
Factor for annular gap		α_{gap}	[-]	0,5 (1,0) ¹⁾								
¹⁾ Value in brackets valid for complete filled annular gap with mortar between anchor and the fixture												
PRO-DOMA injection system vinlyester										Annex C 3		
Performances General design factors relating to the characteristic bearing capacity under tensile / shear load												

Table C4: Characteristic values of resistance for anchor rods in uncracked or cracked concrete

Size			M6	M8	M10	M12	M16	M20	M24	M27	M30	
Combined pullout and concrete cone failure												
Calculation diameter		d	[mm]	6	8	10	12	16	20	24	27	30
Uncracked concrete												
Characteristic bond resistance in uncracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)												
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$	[N/mm ²]	9,0	11,0	11,0	11,0	10,0	9,5	9,0	8,5	8,5
	II: 72 °C / 120 °C			6,5	9,5	9,5	9,0	8,5	8,0	7,5	7,0	7,0
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole) ¹⁾												
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$	[N/mm ²]	---	---	---	9,5	8,5	8,0	7,5	7,0	7,0
	II: 72 °C / 120 °C			---	---	---	7,5	7,0	6,5	6,0	6,0	6,0
Installation factors												
Dry and wet concrete		γ_{inst}	[-]	1,2								
Flooded hole				1,4 ¹⁾								
Cracked concrete												
Characteristic bond resistance in cracked concrete C20/25												
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)												
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,cr}$	[N/mm ²]	---	---	6,0	6,0	6,0	5,5	---	---	---
	II: 72 °C / 120 °C			---	---	5,0	5,0	5,0	5,0	---	---	---
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole) ¹⁾												
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,cr}$	[N/mm ²]	---	---	---	5,0	5,0	4,5	---	---	---
	II: 72 °C / 120 °C			---	---	---	4,0	4,0	4,0	---	---	---
Installation factors												
Dry and wet concrete		γ_{inst}	[-]	1,2								
Flooded hole				1,4 ¹⁾								
¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml												
PRO-DOMA injection system vinlyester									Annex C 4			
Performances Characteristic values for static or quasi-static action under tensile load for anchor rods (uncracked or cracked concrete)												

**Table C5: Characteristic values of resistance for fischer internal threaded anchors
RG MI in uncracked concrete**

Size		M8	M10	M12	M16	M20	
Combined pullout and concrete cone failure							
Calculation diameter	d	[mm]	12	16	18	22	28
Uncracked concrete							
Characteristic bond resistance in uncracked concrete C20/25							
Hammer-drilling with standard drill bit or hollow drill bit (dry and wet concrete)							
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$ [N/mm ²]	10,5	10,0	9,5	9,0	8,5
	II: 72 °C / 120 °C		9,0	8,0	8,0	7,5	7,0
Hammer-drilling with standard drill bit or hollow drill bit (flooded hole) ¹⁾							
Temperature range	I: 50 °C / 80 °C	$\tau_{Rk,ucr}$ [N/mm ²]	10,0	9,0	9,0	8,5	8,0
	II: 72 °C / 120 °C		7,5	6,5	6,5	6,0	6,0
Installation factors							
Dry and wet concrete	γ_{inst}	[-]	1,2				
Flooded hole			1,4 ¹⁾				

¹⁾ Only with coaxial cartridges: 380 ml, 400 ml, 410 ml

PRO-DOMA injection system vinlyester

Performances

Characteristic values for static or quasi-static action under tensile load for fischer internal threaded anchors RG MI and reinforcing bars (uncracked concrete)

Annex C 5

Table C6: Displacements for anchor rods

Size		M6	M8	M10	M12	M16	M20	M24	M27	M30
Displacement-Factors for tensile load ¹⁾										
Uncracked concrete; Temperature range I, II										
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,09	0,09	0,09	0,10	0,10	0,10	0,10	0,11	0,12
δ _{N∞} -Faktor		0,10	0,10	0,10	0,12	0,12	0,12	0,13	0,13	0,14
Cracked concrete; Temperature range I, II										
δ _{N0} -Faktor	[mm/(N/mm ²)]	---	---	0,12	0,12	0,13	0,13	---	---	---
δ _{N∞} -Faktor		---	---	0,27	0,30	0,30	0,30	---	---	---
Displacement-Factors for shear load ²⁾										
Uncracked or cracked concrete; Temperature range I, II										
δ _{V0} -Faktor	[mm/kN]	0,11	0,11	0,11	0,10	0,10	0,09	0,09	0,08	0,07
δ _{V∞} -Faktor		0,12	0,12	0,12	0,11	0,11	0,10	0,10	0,09	0,09
¹⁾ Calculation of effective displacement: $\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$ $\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$ (τ _{Ed} : Design value of the applied tensile stress)					²⁾ Calculation of effective displacement: $\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$ $\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$ (V _{Ed} : Design value of the applied shear force)					

Table C7: Displacements for fischer internal threaded anchors RG MI

Size		M8	M10	M12	M16	M20
Displacement-Factors for tensile load ¹⁾						
Uncracked concrete; Temperature range I, II						
δ _{N0} -Faktor	[mm/(N/mm ²)]	0,10	0,11	0,12	0,13	0,14
δ _{N∞} -Faktor		0,13	0,14	0,15	0,16	0,18
Displacement-Factors for shear load ²⁾						
Uncracked concrete; Temperature range I, II						
δ _{V0} -Faktor	[mm/kN]	0,12	0,12	0,12	0,12	0,12
δ _{V∞} -Faktor		0,14	0,14	0,14	0,14	0,14
<div><div>1) Calculation of effective displacement:</div><div>$\delta_{N0} = \delta_{N0\text{-Faktor}} \cdot \tau_{Ed}$ $\delta_{N\infty} = \delta_{N\infty\text{-Faktor}} \cdot \tau_{Ed}$ (τ_{Ed}: Design value of the applied tensile stress)</div></div>						
<div><div>2) Calculation of effective displacement:</div><div>$\delta_{V0} = \delta_{V0\text{-Faktor}} \cdot V_{Ed}$ $\delta_{V\infty} = \delta_{V\infty\text{-Faktor}} \cdot V_{Ed}$ (V_{Ed}: Design value of the applied shear force)</div></div>						

PRO-DOMA injection system vinlyester

Performances

Displacements for anchor rods and fischer internal threaded anchors RG MI

Annex C 6