

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

ETA-07/0337  
of 4 September 2019

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

CELO Multifunction frame plug MFR

Product family  
to which the construction product belongs

Plastic anchors for redundant non-structural systems in  
concrete and masonry

Manufacturer

CELO Befestigungssysteme GmbH  
Industriestraße 6  
86551 Aichach  
DEUTSCHLAND

Manufacturing plant

CELO Werk I  
Industriestrasse 6  
D-86551 Aichach  
Germany

This European Technical Assessment  
contains

26 pages including 3 annexes which form an integral part  
of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

EAD 330284-00-0604

This version replaces

ETA-07/0337 issued on 20 June 2019

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The Multifunction frame plug in the range of MFR 8, MFR 10 and MFR 14 is a plastic anchor consisting of a plastic sleeve made of polyamide and an accompanying specific screw of galvanised steel or stainless steel.

The plastic sleeve is expanded by screwing in the specific screw which presses the sleeve against the wall of the drilled hole.

The product description is given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchors of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Resistance to steel failure under tension loading	See Annex C 1
Resistance to steel or polymer failure under shear loading	See Annex C 1
Resistance to pull-out or concrete failure or polymer failure under tension loading (base material group a)	See Annex C 2
Resistance in any load direction without lever arm (base material group b, c and d)	See Annexes C 4 - C 9
Edge distance and spacing (base material group a)	See Annex B 3
Edge distance and spacing (base material group b, c and d)	See Annex B 4 – B 5
Displacements under short-term and long-term loading	See Annex C 7 - C8

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A 1
Resistance to fire	See Annex C 3

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with the European Assessment Document EAD 330284-00-0604 the applicable European legal act is: 97/463/EC.

The system to be applied is: 2+

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 4 September 2019 by Deutsches Institut für Bautechnik


BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
E. Aksünger


**Intended use in hollow brick**

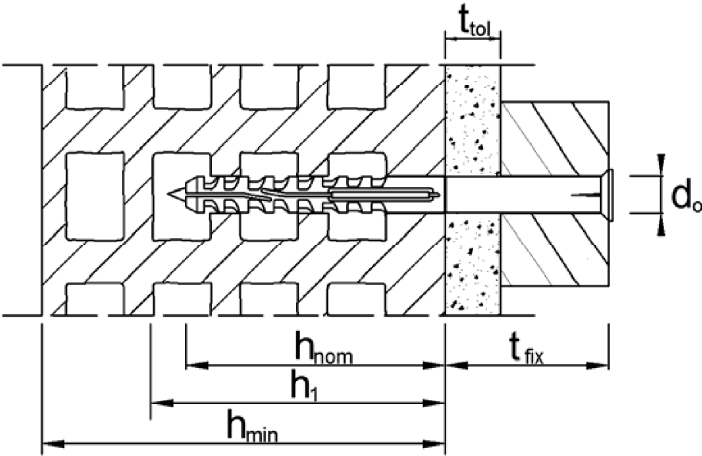

**Intended use in concrete or solid base material**

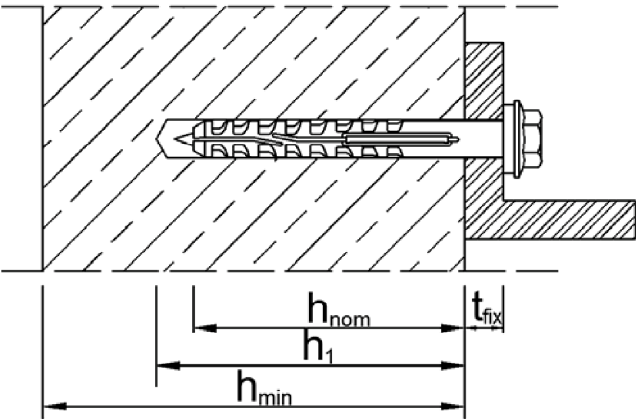

**Intended use in precast prestressed hollow core slabs**

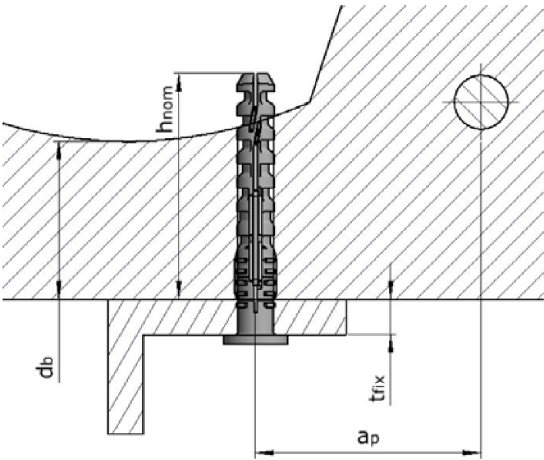

- $h_{nom}$  = overall plastic anchor embedment depth in the base material
- $h_1$  = depth of drilled hole to deepest point
- $h_{min}$  = Minimum thickness of member
- $t_{fix}$  = thickness of fixture
- $t_{tol}$  = thickness of layer or non-load bearing coating
- $d_b$  = mirror thickness
- $a_p$  = distance between plug and reinforcement


CELO Multifunction frame plug MFR

**Product description**  
Installed condition


Annex A1

### Anchor sleeve MFR 8

Sleeve with flat head (FB) or countersunk head (SB)

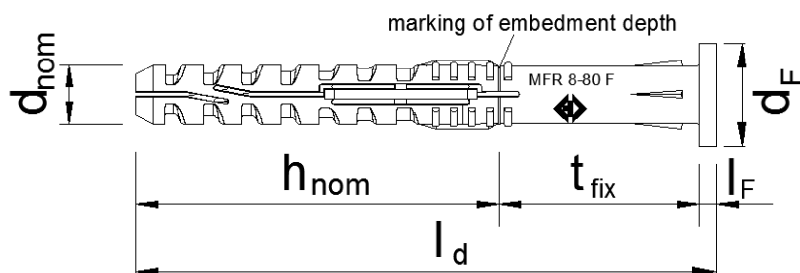

MFR 8 FB

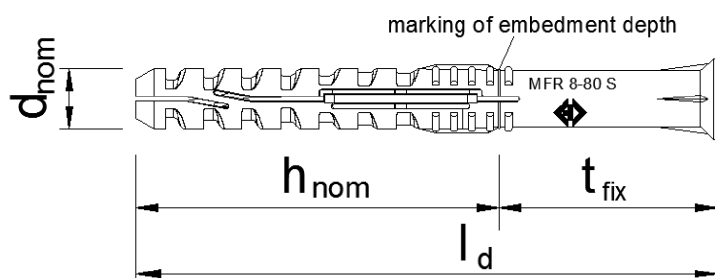


MFR 8 SB

Marking:	Brand	Type	diameter ( $d_{nom}$ ) - length ( $l_d$ )		head form (optional)
Example:	CELO (or Logo)	MFR	8	- 80	F or S (F = FB) (S = SB)

### Special screw (for MFR 8)

Screw head with different tool fittings

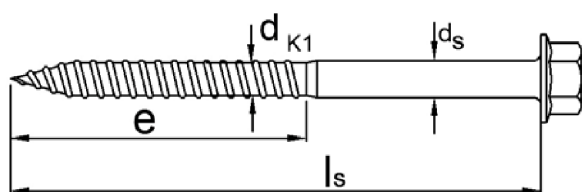

Type SSKS (or SSKS A4)  
galvanised steel or  
stainless steel (A4)



Type SSK (or SSK A4)  
galvanised steel or stainless  
steel (A4)



Type TX (or TX A4)  
galvanised steel or  
stainless steel (A4)

Marking:	Brand	Code No screw length	manufacturer code
Example:	X	12	1

CELO Multifunction frame plug MFR


### Product description

MFR 8 – Anchor types, screw specification, marking


Annex A2

### Anchor sleeve MFR 10


Sleeve with flat head (FB) or countersunk head (SB)

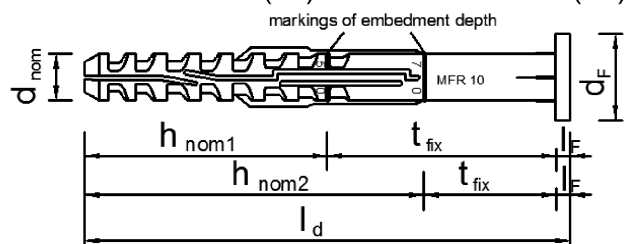


MFR 10 FB

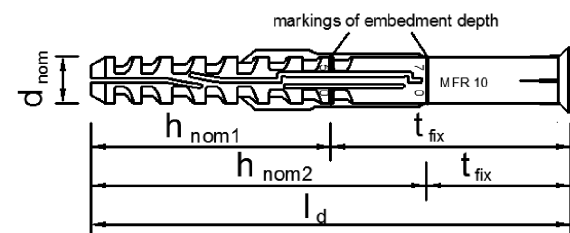

MFR 10 SB

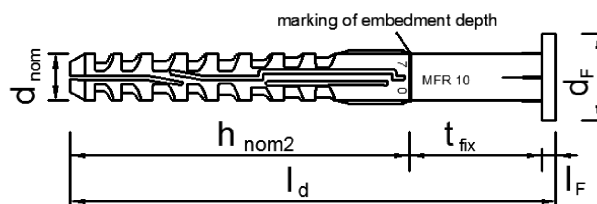

MFR 10 FB (alternative)

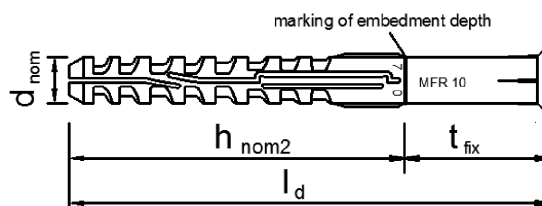


MFR 10 SB (alternative)


Marking:	Brand	Type	diameter ( $d_{nom}$ ) - length ( $l_d$ )		head form (optional)
Example:	CELO (or Logo)	MFR	10	100	F or S (F = FB) (S = SB)

### Special screw (for MFR 10)


Screw head with different tool fittings

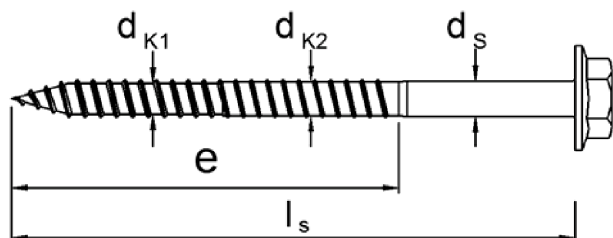

Type SSKS (or SSKS A4)  
galvanised steel or  
stainless steel (A4)



Type SSK (or SSK A4)  
galvanised steel or  
stainless steel (A4)



Type TX (or TX A4)  
galvanised steel or  
stainless steel (A4)

Marking:	Brand	Code No screw length	manufacturer code
Example:	X	12	1

CELO Multifunction frame plug MFR


### Product description

MFR 10 – Anchor types, screw specification, marking


Annex A3

### Anchor sleeve MFR 14

Sleeve with flat head (FB) or countersunk head (SB)

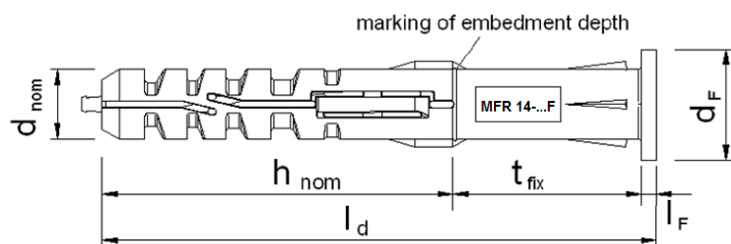

MFR 14 FB

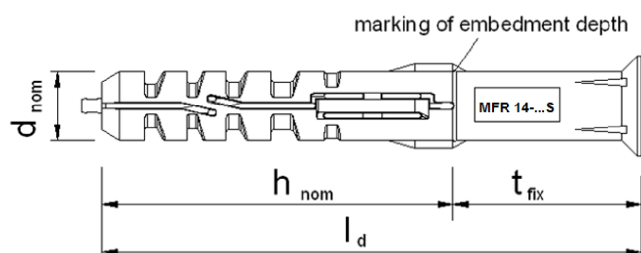


MFR 14 SB

Marking:	Brand	Type	diameter ( $d_{nom}$ ) - length ( $l_d$ )		head form (optional)
Example:	MEA (or CELO or Logo)	MFR	14	- 110	F or S (F = FB) (S = SB)

### Special screw (for MFR 14)

Screw head with different tool fittings

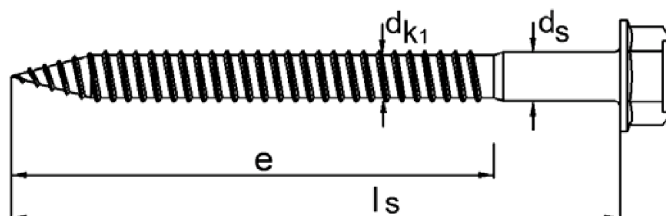

Type SSKS (or SSKS A4)  
galvanised steel or stainless  
steel (A4), optional with glide  
coating



Type TX (or TX A4)  
galvanised steel or stainless  
steel (A4), optional with glide  
coating

Marking:	Brand	Code No screw length	manufacturer code
Example:	X	11	1

CELO Multifunction frame plug MFR

### Product description

MFR 14 – Anchor types, screw specification, marking

Annex A4



**Table A5.1: Dimension [mm]**

	Anchor sleeve							
	$l_d$	$\varnothing d_{nom}$	$t_{fix} \text{ min}$	$t_{fix} \text{ max}$	$h_{nom1}$	$h_{nom2}$	$l_F^{2)}$	$\varnothing d_F$
MFR 8	$\geq 60$	8	$\geq 1$	110	50		2,3	14
MFR 10	$\geq 80$	10	$\geq 1$	500	50	70	3	18
MFR 14	$\geq 80$	14	$\geq 1$	500	70		3	22

	Special screw				
	$l_s^{1)}$	$\varnothing d_s$	$\varnothing d_{k1}$	$\varnothing d_{k2}$	e
for MFR 8	$\geq 65$	6	5,2	-	48
for MFR 10	$\geq 85$	7	5,8	6,3	75
for MFR 14	$\geq 85$	10	8,4	-	75

<sup>1)</sup> To insure, that the screw penetrates the anchor sleeve,  $l_s$  must be  $l_d + 5 \text{ mm}$

<sup>2)</sup> only valid for plan head version

**Table A5.2: Materials**

Designation	Material
anchor sleeve	Polyamid PA 6
special screw (steel, zinc plated)	Steel, zinc plated galvanised $\geq 5 \mu\text{m}$ acc. EN ISO 4042:1999 $f_{yk} \geq 480 \text{ N/mm}^2$ , $f_{uk} \geq 600 \text{ N/mm}^2$ ( $\geq 6.8$ screw)
special screw (stainless steel)	Stainless steel A4 according to EN 10088-3:2014, material 1.4401 or 1.4571 $f_{yk} \geq 450 \text{ N/mm}^2$ , $f_{uk} \geq 700 \text{ N/mm}^2$ strength class 70

CELO Multifunction frame plug MFR

**Product description**  
Dimensions and materials

Annex A5

## Specifications of intended use

### Anchorage subject to:

- Static and quasi-static loads.
- Multiple fixing of non-structural applications

### Base materials:

- Reinforced or unreinforced normal weight concrete with strength classes  $\geq$  C12/15 (base material group a) according to EN 206:2013, Annex C2.
- Precast prestressed hollow core slabs with strength classes  $\geq$  C45/55 (base material group a) according to Annex C2
- Solid brick masonry (base material group b) according to Annex C4-C6  
Note: The characteristic resistance is also valid for larger brick sizes and higher compressive strength of the masonry unit.
- Hollow brick masonry (base material group c) according to Annex C4-C6
- Aerated concrete (base material group d) according to Annex C10
- Mortar strength class of the masonry  $\geq$  M2,5 according to EN 998-2:2010.
- For other base materials of the base material groups a, b, c or d the characteristic resistance of the anchor may be determined by job site tests according to TR 051:2018-04.

### Temperature Range for use:

- a: - 40° C to + 40° C (max. short term temperature + 40° C and max long term temperature + 24° C)
- b: - 40° C to + 80° C (max. short term temperature + 80° C and max long term temperature + 50° C)

### Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (screw with zinc coated steel, stainless steel)
- The specific screw made of galvanised steel may also be used in structures to external atmospheric exposure, if the area of the head of the screw is protected against moisture and driving rain after mounting of the fixing unit in this way, that intrusion of moisture into the anchor shaft is prevented. Therefore there shall be an external cladding or a ventilated rainscreen mounted in front of the head of the screw and the head of the screw itself shall be coated with a soft plastic, permanently elastic bitumen-oil-combination coating (e. g. undercoating or body cavity protection for cars)
- Structures subject to external atmospheric exposure (includ. industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel).

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

### Design:

- The anchorages are to be designed in accordance with TR 064:2018-05 under the responsibility of an engineer experienced in anchorages and masonry work.
- Verifiable calculation notes and drawings shall be prepared taking account of the loads to be anchored, the nature and strength of the base materials and the dimensions of the anchorage members as well as of the relevant tolerances. The position of the anchor is indicated on the design drawings.
- Fasteners are only to be used for multiple use for non-structural application according to TR 064:2018-05.

### Installation:

- Hole drilling by the drill methodes according to Annex C4, C5 or C6 for base material group b and c, hammer drilling is to use for base material group a.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Temperature of the plug at installation from 0°C to + 50°C.
- Exposure to UV due to solar radiation of the anchor not protected  $\leq$  6 weeks.

CELO Multifunction frame plug MFR

**Intended use**  
Specification of intended use

Annex B1

**Table B2.1: Installation parameter in concrete, masonry and AAC**

Anchor type			MFR 8	MFR 10		MFR 14
Overall plastic anchor embedment depth in the base material <sup>1), 2)</sup>	$h_{nom} \geq$	[mm]	50	50	70	70
Drill hole diameter	$d_0 <$	[mm]	8	10		14
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45		14,50
Depth of drill hole to the deepest point <sup>1)</sup>	$h_1 \geq$	[mm]	60	60	80	80
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9,0	10,5		15

<sup>1)</sup> See Annex A1

<sup>2)</sup> For hollow and perforated masonry the influence of  
 $h_{nom} > 50$  mm (MFR 8)  
 $h_{nom1} > 50$  mm respectively  $h_{nom2} > 70$  mm (MFR 10)  
 $h_{nom} > 70$  mm (MFR 14)  
has to be detected by job site tests.

**Table B2.2: Installation parameter in precast prestressed hollow core slabs**

Anchor type			MFR 8	MFR 10
Drill hole diameter	$d_0 <$	[mm]	8	10
Cutting diameter of drill bit	$d_{cut} \leq$	[mm]	8,45	10,45
Depth of drill hole to the deepest point <sup>1)</sup>	$h_1 \geq$	[mm]	60	80
Overall plastic anchor embedment depth in the concrete core slab	$h_{nom} \geq$	[mm]	50	70
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9,0	10,5
Bottom flange thickness	$d_b \geq$	[mm]	35	35
Distance between plug position and prestressing steel	$a_p \geq$	[mm]	50	50

<sup>1)</sup> See Annex A1

CELO Multifunction frame plug MFR

**Product description**

Installation parameters in concrete, masonry, AAC and hollow core slabs

Annex B2

**Table B3.1: Minimum thickness of member, edge distance and anchor spacing in concrete**

- MFR 8:** Fixing points with a spacing  $a \leq 55$  mm are considered as a group with a max. characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1. For  $a > 55$  mm the anchors are considered as single anchors, each with a characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1. and C2.2.
- MFR 10:** Fixing points with a spacing  $a \leq 75$  mm are considered as a group with a max. characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1. For  $a > 75$  mm the anchors are considered as single anchors, each with a characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1. and C2.2.
- MFR 14:** Fixing points with a spacing  $a \leq 80$  mm are considered as a group with a max. characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1. For  $a > 80$  mm the anchors are considered as single anchors, each with a characteristic resistance  $N_{Rk,p}$  acc. to Table C2.1.

	Minimum thickness $h_{min}$ [mm]	Characteristic edge distance $c_{cr,N}$ [mm]	Minimum edge distances $c_{min}$ [mm]	Minimum spacing $s_{min}$ [mm]
<b>MFR 8</b>				
Concrete $\geq$ C16/20	100	50	60	50
Concrete C12/15	100	70	85	70
<b>MFR 10 <math>h_{nom1} = 50</math> mm</b>				
Concrete $\geq$ C16/20	100	50	50	50
Concrete $\geq$ C12/15	100	70	70	70
<b>MFR 10 <math>h_{nom2} = 70</math> mm</b>				
Concrete $\geq$ C16/20	110	70	60	50
Concrete C12/15	110	100	85	70
<b>MFR 14</b>				
Concrete $\geq$ C16/20	120	80	100	100
Concrete C12/15	120	112	140	140

**Table B3.2: Minimum thickness of member, edge distance and anchor spacing in precast prestressed hollow core slabs**

	Minimum thickness $h_{min}$ [mm]	Characteristic edge distance $c_{cr,N}$ [mm]	Minimum edge distances $c_{min}$ [mm]	Minimum spacing $s_{min}$ [mm]
<b>MFR 8</b>				
Concrete $\geq$ C45/55	200	50	60	50
<b>MFR 10</b>				
Concrete $\geq$ C45/55	200	70	60	50

CELO Multifunction frame plug MFR

**Intended use**  
Minimum thickness, spacing, edge distance in concrete and hollow core slabs

Annex B3

**Table B4: Minimum thickness of member, edge distance and anchor spacing in masonry**

Base material <sup>1)</sup>	Minimum thickness of member  $h_{min}$ [mm]	Minimum edge distance  $c_{min}$ [mm]	Single anchor  $a_{min}$ [mm]	Minimum spacing	
				Anchor Group <sup>2)</sup> perpendicular to free edge  $s_{1,min}$ [mm]	parallel to free edge  $s_{2,min}$ [mm]
<b>MFR 8</b>					
Clay brick <b>Mz-1.8 - NF</b>	115	100	250	200	400
Sand-lime solid brick <b>KS - NF</b>	115	100	250	200	400
Hollow clay brick <b>HLz 12-1.0 - 12DF</b>	240	100	250	200	400
Hollow sandlime brick <b>KSL 12-1.4 - 3DF</b>	175	100	250	200	400
Hollow light concrete bl. <b>Hbl 2-0.8 - 16DF</b>	240	100	250	200	400
Hollow concrete block <b>Hbn 1.4 - 12DF</b>	240	100	250	200	400
<b>MFR 10 <math>h_{nom1} = 50</math> mm</b>					
Clay brick <b>Mz-1.8 2DF</b>	115	65	250	200	400
Sand-lime solid brick <b>KS - 3DF</b>	175	65	250	200	400
Hollow clay brick <b>HLz 12-1.0 - 12DF</b>	240	100	250	200	400
Hollow sandlime brick <b>KSL 12-1.4 - 8DF</b>	240	100	250	200	400
Hollow concrete block <b>Hbn 1.4 - 12DF</b>	240	100	250	200	400
<b>MFR 10 <math>h_{nom2} = 70</math> mm</b>					
Clay brick <b>Mz-1.8 NF</b>	115	100	250	200	400
Sand-lime solid brick <b>KS - NF</b>	115	100	250	200	400
Hollow clay brick <b>HLz 12-1.0 - 2DF</b>	115	100	250	200	400
Hollow sandlime brick <b>KSL 12-1.4 - 8DF</b>	240	100	250	200	400
Hollow clay brick Brique Creuse <b>C 3-0.7</b>	200	100	250	200	400
Hollow concrete block <b>Hbn 1.4 - 12DF</b>	240	100	250	200	400
<b>MFR 14</b>					
Clay brick <b>Mz-1.8 NF</b>	115	100	250	200	400
Sand-lime solid brick <b>KS - 8DF</b>	240	100	250	200	400
Sand-lime solid brick <b>KS - 2DF</b>	115	100	250	200	400
Hollow clay brick <b>HLz 12-1.0 - 2DF</b>	115	120	250	240	480
Hollow sandlime brick <b>KSL 12-1.4 - 8DF</b>	240	100	250	200	400

<sup>1)</sup> Information for base material masonry: see Annex C4, Table C4

<sup>2)</sup> The design method is valid for single anchors and anchor groups with two or four anchors.

CELO Multifunction frame plug MFR


**Intended use**  
Minimum thickness, spacing, edge distance in masonry

Annex B4

**Table B5: Minimum thickness of member, edge distance and anchor spacing in AAC**  
(Autoclaved aerated concrete)

MFR 10 and MFR 14	Minimum thickness of member	Minimum edge distance	Minimum spacing		
			Single anchor	Anchor Group <sup>1)</sup>	
				perpendicular to free edge	parallel to free edge
Base material	$h_{min}$ [mm]	$c_{min}$ [mm]	$a_{min}$ [mm]	$s_{1,min}$ [mm]	$s_{2,min}$ [mm]
EN 771-4 AAC 2	100	50	250	100	200
EN 771-4 AAC 4	100	75	250	150	300
EN 771-4 AAC 6	100	150	250	200	400

<sup>1)</sup> The design method is valid for single anchors and anchor groups with two or four anchors.

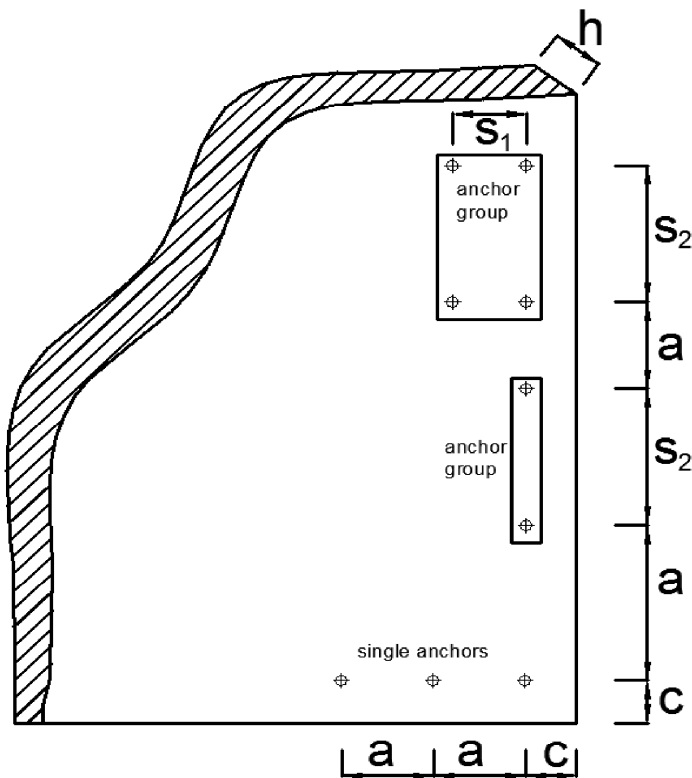

CELO Multifunction frame plug MFR

**Intended use**  
Minimum thickness, spacing, edge distance in AAC

Annex B5

**Table B6: Geometry of stones**

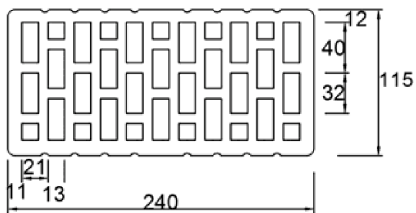


Fig. 1 HLZ 12 2DF

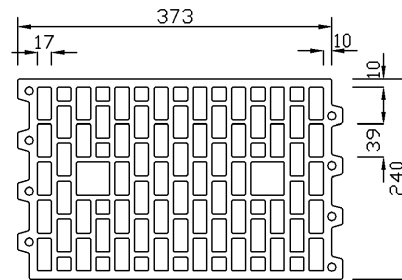


Fig. 2 HLZ 12 12DF

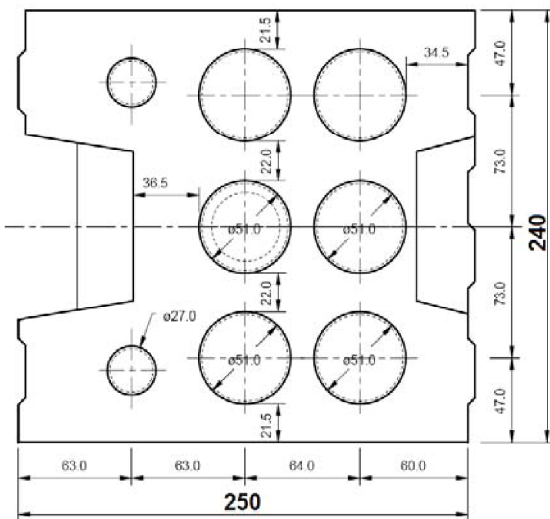


Fig. 3 KSL 12 8DF

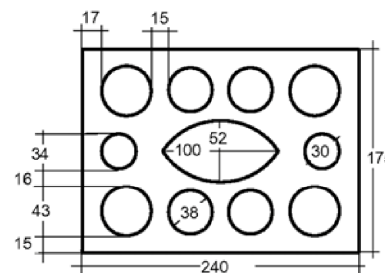


Fig. 4 KSL 12-1.4 - 3DF

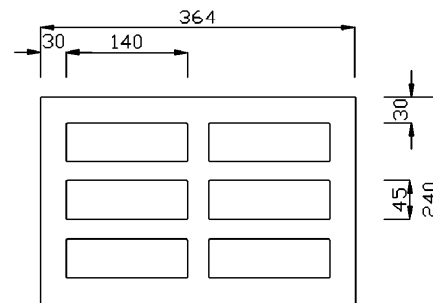


Fig. 6 HBN 1,4 12DF

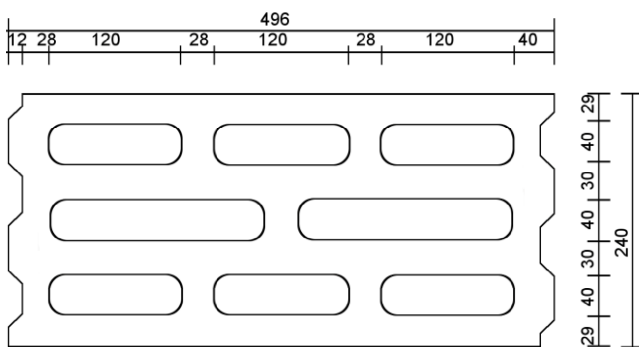


Fig. 5 HBL 2-0,8 16DF




Fig. 7 Brique Creuse C

CELO Multifunction frame plug MFR

**Intended use**  
Geometry of stones



Annex B6

## Installation instruction MFR



in concrete or

hollow core slabs



in masonry





1. Drill the borehole and clean the hole.  
Drilling methode:  
Concrete: hammer drill  
Masonry: According Tab. C4, C5, C6




2. Hammer in the plug slightly through the fixture part till the plug is flush to this. Minimum setting depth (50 mm or 70 mm) must be observed.



3. Tighten the screw with screw driver till the screw touches the collar of the sleeve. The screw must fit tight on the surface of the fixture part.



4. Correctly installed plug with screw in concrete or in masonry.



4. Correctly installed plug with screw in hollow concrete core slab.

CELO Multifunction frame plug MFR

**Intended use**  
Installation instruction

Annex B7



**Table C1.1: Characteristic bending resistance of the screw**

<b>Screw Ø 6 mm for MFR 8</b>		galvanised steel	stainless steel
Characteristic bending resistance	$M_{Rk,s}$ [Nm]	8,8	10,3
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56
<b>Screw Ø 7 mm for MFR 10</b>		galvanised steel	stainless steel
Characteristic bending resistance	$M_{Rk,s}$ [Nm]	15,3	17,8
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56
<b>Screw Ø 10 mm for MFR 14</b>		galvanised steel	stainless steel
Characteristic bending resistance	$M_{Rk,s}$ [Nm]	36,7	42,9
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56

<sup>1)</sup> in absence of other national regulations

**Table C1.2: Characteristic resistance of the screw**

<b>Failure of expansion element (special screw)</b>			
<b>Special screw Ø 6 mm for MFR 8</b>		galvanised steel	stainless steel
Characteristic tension resistance	$N_{Rk,s}$ [kN]	11,7	13,7
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,5	1,87
Characteristic shear resistance	$V_{Rk,s}$ [kN]	5,8	6,8
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56
<b>Special screw Ø 7 mm for MFR 10</b>		galvanised steel	stainless steel
Characteristic tension resistance	$N_{Rk,s}$ [kN]	17,0	19,8
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,5	1,87
Characteristic shear resistance	$V_{Rk,s}$ [kN]	8,5	9,9
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56
<b>Special screw Ø 10 mm for MFR 14</b>		galvanised steel	stainless steel
Characteristic tension resistance	$N_{Rk,s}$ [kN]	30,5	35,5
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,5	1,87
Characteristic shear resistance	$V_{Rk,s}$ [kN]	15,2	17,8
Partial safety factor	$\gamma_{Ms}$ <sup>1)</sup>	1,25	1,56

<sup>1)</sup> in absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**

Characteristic resistance and characteristic bending resistance of the screw

Annex C1

**Table C2.1: Characteristic resistance for use in cracked and uncracked concrete**


**(base material group "a")**

Pull-out failure (plastic sleeve)			Concrete $\geq$ C16/20		Concrete C12/15	
			$\vartheta =$ 24/40 °C	$\vartheta =$ 50/80 °C	$\vartheta =$ 24/40 °C	$\vartheta =$ 50/80 °C
<b>MFR 8</b>						
Characteristic resistance	$N_{Rk,p}$	[kN]	2,5	2,5	1,5	1,5
Partial safety factor	$\gamma_{Mc}^{1)}$		1,8	1,8	1,8	1,8
<b>MFR 10 <math>h_{nom1} = 50</math> mm</b>						
Characteristic resistance	$N_{Rk,p}$	[kN]	2,5	2,0	1,5	1,5
Partial safety factor	$\gamma_{Mc}^{1)}$		1,8	1,8	1,8	1,8
<b>MFR 10 <math>h_{nom2} = 70</math> mm</b>						
Characteristic resistance	$N_{Rk,p}$	[kN]	4,0	3,0	2,5	2,0
Partial safety factor	$\gamma_{Mc}^{1)}$		1,8	1,8	1,8	1,8
<b>MFR 14</b>						
Characteristic resistance	$N_{Rk,p}$	[kN]	4,5	3,0	3,0	2,0
Partial safety factor	$\gamma_{Mc}^{1)}$		1,8	1,8	1,8	1,8

<sup>1)</sup> In absence of other national regulations

**Table C2.2: Characteristic resistance for use in precast prestressed hollow core slabs**

**(base material group "a")**

Pull-out failure (plastic sleeve)			Precast prestressed hollow core slabs, Concrete $\geq$ C45/55	
			Producer: DW Systembau, D-29640 Schneverdingen	
<b>MFR 8</b>			Bottom flange thickness	
Characteristic resistance	$N_{Rk,p}$	[kN]	$d_b \geq 35$ mm	3,50
Partial safety factor	$\gamma_{Mc}^{1)}$			1,8
<b>MFR 10</b>				
Characteristic resistance	$N_{Rk,p}$	[kN]	$d_b \geq 35$ mm	1,20
Partial safety factor	$\gamma_{Mc}^{1)}$			1,8

<sup>1)</sup> In absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**

Characteristic resistance for use in concrete and in precast hollow core slabs

Annex C2

**Table C3.1: Displacements under tension and shear loading in concrete**

	Tension load			Shear load		
Concrete $\geq$ C16/20	N <sup>1)</sup>	$\delta_{NO}$	$\delta_{N\infty}$	V <sup>1)</sup>	$\delta_{VO}$	$\delta_{V\infty}$
MFR 8	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
temperature $\vartheta = 24/40$ °C	0,99	0,25	0,05	2,47	0,80	1,20
temperature $\vartheta = 50/80$ °C	0,99	0,25	0,06	2,47	0,80	1,20
MFR 10 $h_{nom1} = 50$ mm						
temperature $\vartheta = 24/40$ °C	0,99	0,01	0,03	1,04	0,17	0,26
temperature $\vartheta = 50/80$ °C	0,79	0,30	0,60	1,04	0,17	0,26
MFR 10 $h_{nom2} = 70$ mm						
temperature $\vartheta = 24/40$ °C	1,59	0,12	0,15	3,37	2,20	3,30
temperature $\vartheta = 50/80$ °C	1,19	0,11	0,15	3,37	2,20	3,30
MFR 14						
temperature $\vartheta = 24/40$ °C	1,79	0,30	0,60	6,04	2,50	3,75
temperature $\vartheta = 50/80$ °C	1,19	0,25	0,50	6,04	2,50	3,75

<sup>1)</sup> Intermediate values by linear interpolation

**Table C 3.2: Value under fire exposure in concrete C20/25 to C50/60 in any load direction, no permanent centric tension load and without lever arm, fastening of facade systems**

Anchor type	Fire resistance class	F <sub>RK,fi,90</sub>
MFR 10	R 90	0,8 kN
MFR 14	R 90	0,8 kN

CELO Multifunction frame plug MFR

**Performances**

Displacement under tension and shear loading in concrete,  
Value under fire exposure

Annex C3

**Table C4 : Characteristic resistance  $F_{Rk}$  [kN] in solid and hollow or perforated masonry  
(base material group "b" + "c") for MFR 8**

<b>MFR 8</b>	Bulk density class $\rho$	Minimum compressive Strength $f_b$	Minimum DF or minimum size (L x W x H)	figure/ geometry	drill method H= hammer R= rotary	Characteristic resistance $F_{Rk}$ <sup>1)</sup> [kN] $\vartheta = 24/40\text{ °C}$ $\vartheta = 50/80\text{ °C}$
Base material	[kg/dm <sup>3</sup> ]	[N/mm <sup>2</sup> ]	[mm]			
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$\geq 20$	NF (240*115*71)		H	<b>1,50</b>
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	NF (240*116*71)		H	<b>0,90</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$\geq 20$	2DF (240*115*113)		H	<b>3,00</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	2DF (240*115*113)		H	<b>2,00</b>
Hollow clay brick <b>HLz</b> EN 771-1:2011+A1:2015	1,0	12	12 DF (373*240*249)	Annex B6 figure 2	R only	<b>0,50</b>
Hollow Sand-lime brick <b>KSL</b> EN 771-2:2011+A1:2015	$\geq 1,4$	17	3 DF (240*175*113)	Annex B6 figure 4	R	<b>1,20</b>
		12				<b>0,75</b>
Hollow light concrete block <b>Hbl</b> EN 771-3:2011+A1:2015	$\geq 0,8$	2	16 DF 500*240*248	Annex B6 figure 5	R	<b>0,30</b>
Hollow concrete block <b>Hbn</b> EN 771-3:2011+A1:2015	$\geq 1,4$	25	12 DF 365*240*238	Annex B6 figure 6	H	<b>1,20</b>
Partial safety factor <sup>2)</sup>					$\gamma_{Mm}$	<b>2,5</b>

<sup>1)</sup> Characteristic resistance for tension, shear or combined tension and shear loading

<sup>2)</sup> In absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**

MFR 8 – Characteristic resistance for use in masonry

Annex C4

**Table C5: Characteristic resistance  $F_{Rk}$  [kN] in solid and hollow or perforated masonry**  
**(base material group "b" + "c") for MFR 10**

MFR 10  Base material	Bulk density class $\rho$ [kg/dm <sup>3</sup> ]	Minimum compressive strength $f_b$ [N/mm <sup>2</sup> ]	Minimum DF or minimum size (L x W x H) [mm]	figure/geo-metry	drill method H=hammer  R=rotary	Characteristic resistance $F_{Rk}$ <sup>1)</sup> [kN] $h_{nom1} = 50 \text{ mm}$		Characteristic resistance $F_{Rk}$ <sup>1)</sup> [kN] $h_{nom2} = 70 \text{ mm}$	
						$\vartheta = 24/40 \text{ °C}$	$\vartheta = 50/80 \text{ °C}$	$\vartheta = 24/40 \text{ °C}$	$\vartheta = 50/80 \text{ °C}$
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$\geq 20$	NF (240*116*71)		H	3,5	3,0	3,0	2,5
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	NF (240*116*71)		H	2,5	2,0	2,0	1,5
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$\geq 20$	NF (240*115*70)		H	4,0	3,5	3,0	2,5
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	NF (240*115*70)		H	2,5	2,5	2,0	2,0
Hollow clay brick <b>HLz</b> EN 771-1:2011+A1:2015	$\geq 1,0$	12	2 DF (235*112*115)	Annex B6 figure 1	R only	-	-	0,75	0,60
Hollow clay brick <b>HLz</b> EN 771-1:2011+A1:2015	$\geq 1,0$	12	12 DF (373*240*249)	Annex B6 figure 2	R only	1,2	1,2	-	-
Hollow Sand-lime brick <b>KSL</b> EN 771-2:2011+A1:2015	$\geq 1,4$	12	8 DF (250*240*237)	Annex B6 figure 3	R	1,5	1,2	0,9	0,6
Hollow concrete block <b>Hbn</b> EN 771-3:2011+A1:2015	$\geq 1,4$	25	12 DF (365*240*238)	Annex B6 figure 6	H	2,5	2,0	0,75	0,75
Hollow clay brick Brique Creuse C <b>LD 3-0,7-500x200x200</b> EN 771-1:2011+A1:2015	$\geq 0,7$	3	(496*196*194)	Annex B6 figure 7	R only	-	-	0,30	0,30
Partial safety factor <sup>2)</sup>					$\gamma_{Mm}$	2,5			

<sup>1)</sup> Characteristic resistance for tension, shear or combined tension and shear loading

<sup>2)</sup> In absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**  
MFR 10 – Characteristic resistance for use in masonry

Annex C5

**Table C6: Characteristic resistance  $F_{Rk}$  [kN] in solid and hollow or perforated masonry  
(base material group "b" + "c") for MFR 14**

MFR 14	Bulk density class $\rho$	Minimum Compressive strength $f_b$	Minimum DF or minimum size (L x W x H)	figure/ geometry	drill method  H= hammer  R= rotary	Characteristic resistance  $F_{Rk}$ <sup>1)</sup>	
						$\vartheta = 24/40$ °C	$\vartheta = 50/80$ °C
Base material	[kg/dm <sup>3</sup> ]	[N/mm <sup>2</sup> ]	[mm]				
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$\geq 20$	NF (240*116*71)		H	<b>4,5</b>	<b>3,0</b>
Clay brick <b>Mz</b> EN 771-1:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	NF (240*116*71)		H	<b>3,0</b>	<b>2,0</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$\geq 20$	8 DF (250*240*237)		H	<b>5,0</b>	<b>4,5</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	8 DF (250*240*237)		H	<b>3,5</b>	<b>3,0</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$\geq 20$	2 DF (240*115*113)		H	<b>4,5</b>	<b>4,0</b>
Sand-lime solid brick <b>KS</b> EN 771-2:2011+A1:2015	$\geq 1,8$	$10 \leq f_b < 20$	2 DF (240*115*113)		H	<b>3,0</b>	<b>2,5</b>
Hollow clay brick <b>HLz</b> EN 771-1:2011+A1:2015	$\geq 1,0$	12	2 DF (235*115*113)	Annex B6 figure 1	R only	<b>0,75</b>	<b>0,5</b>
Hollow Sand-lime brick <b>KSL</b> EN 771-2:2011+A1:2015	$\geq 1,4$	12	8 DF (250*240*237)	Annex B6 figure 3	R	<b>1,2</b>	<b>0,75</b>
Partial safety factor <sup>2)</sup>					$\gamma_{Mm}$	<b>2,5</b>	

<sup>1)</sup> Characteristic resistance for tension, shear or combined tension and shear loading

<sup>2)</sup> In absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**

MFR 14 – Characteristic resistance for use in masonry

Annex C6

**Table C7: Displacements under tension and shear loading in masonry  
for temperature  $\vartheta = 24/40\text{ °C}$**

Base material	Displacements			Displacements		
	Tension load			Shear load		
	N	$\delta_{NO}$	$\delta_{N\infty}$	V	$\delta_{VO}$	$\delta_{V\infty}$
	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
<b>MFR 8</b>						
Clay brick <b>Mz - NF</b>	0,26	0,02	0,04	0,26	0,22	0,33
Sand-lime solid brick <b>KS – 2 DF</b>	0,57	0,33	0,66	0,57	0,48	0,72
Hollow clay brick <b>HLz 12</b>	0,14	0,01	0,02	0,42	0,08	0,12
Hollow Sand-lime brick <b>KSL 12</b>	0,25	0,11	0,22	0,20	0,37	0,55
Hollow light concrete block <b>Hbl 2</b>	0,09	0,02	0,04	0,13	0,02	0,03
Hollow concrete block <b>Hbn</b>	0,08	0,02	0,04	0,09	0,08	0,11
<b>MFR 10 <math>h_{nom1} = 50\text{ mm}</math></b>						
Clay brick <b>Mz - NF</b>	1,00	0,01	0,03	1,00	0,83	1,25
Sand-lime solid brick <b>KS - NF</b>	1,14	0,02	0,03	1,14	0,95	1,43
Hollow clay brick <b>HLz 12-1.0</b>	0,34	0,01	0,01	0,34	0,28	0,42
Hollow Sand-lime brick <b>KS L 12-1,4</b>	0,43	0,01	0,01	0,43	0,36	0,54
Hollow concrete block <b>Hbn</b>	0,71	0,01	0,02	0,71	0,59	0,89
<b>MFR 10 <math>h_{nom2} = 70\text{ mm}</math></b>						
Clay brick <b>Mz - NF</b>	0,86	0,2	0,4	0,86	0,71	1,07
Sand-lime solid brick <b>KS - NF</b>	0,86	0,2	0,4	0,86	0,71	1,07
Hollow clay brick <b>HLz 12-1.0</b>	0,21	0,1	0,2	0,21	0,43	0,64
Hollow Sand-lime brick <b>KS L 12-1,4</b>	0,26	0,1	0,2	0,26	0,51	0,77
Brique Creuse C <b>LD 3-0,7</b>	0,09	0,2	0,4	0,09	0,17	0,26
Hollow concrete block <b>Hbn</b>	0,08	0,01	0,02	0,23	0,16	0,23
<b>MFR 14</b>						
Clay brick <b>Mz - NF</b>	1,29	0,2	0,4	1,29	1,07	1,61
Sand-lime solid brick <b>KS - 8 DF</b>	1,43	0,2	0,4	1,43	1,19	1,79
Sand-lime solid brick <b>KS - 2 DF</b>	1,29	0,2	0,4	1,29	1,07	1,61
Hollow clay brick <b>HLz 12 - 1.0</b>	0,21	0,1	0,2	0,21	0,43	0,64
Hollow Sand-lime brick <b>KS L 12 - 1,4</b>	0,34	0,1	0,2	0,34	0,69	1,03

CELO Multifunction frame plug MFR

**Performances**

Displacement for use in masonry, temperature  $\vartheta = 24/40\text{ °C}$

Annex C7

**Table C8: Displacements under tension and shear loading in masonry  
for temperature  $\vartheta = 50/80$  °C**

Base material	Displacements			Displacements		
	Tension load			Shear load		
	N	$\delta_{NO}$	$\delta_{N\infty}$	V	$\delta_{VO}$	$\delta_{V\infty}$
	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
<b>MFR 8</b>						
Clay brick <b>Mz - NF</b>	0,26	0,02	0,04	0,26	0,22	0,33
Sand-lime solid brick <b>KS – 2 DF</b>	0,57	0,33	0,66	0,57	0,48	0,72
Hollow clay brick <b>HLz 12</b>	0,14	0,01	0,02	0,42	0,08	0,12
Hollow Sand-lime brick <b>KSL 12</b>	0,25	0,11	0,22	0,20	0,37	0,55
Hollow light concrete block <b>Hbl 2</b>	0,09	0,02	0,04	0,13	0,02	0,03
Hollow concrete block <b>Hbn</b>	0,08	0,02	0,04	0,09	0,08	0,11
<b>MFR 10 <math>h_{nom1} = 50</math> mm</b>						
Clay brick <b>Mz - NF</b>	0,86	0,38	0,76	0,86	0,72	1,08
Sand-lime solid brick <b>KS - NF</b>	1,00	0,41	0,82	1,00	0,83	1,25
Hollow clay brick <b>HLz 12-1.0</b>	0,34	0,27	0,56	0,34	0,28	0,42
Hollow Sand-lime brick <b>KS L 12-1,4</b>	0,34	0,27	0,56	0,34	0,28	0,42
Hollow concrete block <b>Hbn</b>	0,59	0,30	0,60	0,59	0,49	0,74
<b>MFR 10 <math>h_{nom2} = 70</math> mm</b>						
Clay brick <b>Mz - NF</b>	0,71	0,2	0,4	0,71	0,60	0,89
Sand-lime solid brick <b>KS - NF</b>	0,71	0,2	0,4	0,71	0,60	0,89
Hollow clay brick <b>HLz 12-1.0</b>	0,17	0,1	0,2	0,17	0,34	0,51
Hollow Sand-lime brick <b>KS L 12-1,4</b>	0,17	0,1	0,2	0,17	0,34	0,51
Brique Creuse C <b>LD 3-0,7</b>	0,09	0,2	0,4	0,09	0,17	0,26
Hollow concrete block <b>Hbn</b>	0,08	0,01	0,02	0,23	0,16	0,23
<b>MFR 14</b>						
Clay brick <b>Mz - NF</b>	0,86	0,2	0,4	0,86	0,71	1,07
Sand-lime solid brick <b>KS - 8 DF</b>	1,29	0,2	0,4	1,29	1,07	1,61
Sand-lime solid brick <b>KS - 2 DF</b>	1,14	0,2	0,4	1,14	0,95	1,43
Hollow clay brick <b>HLz 12 - 1.0</b>	0,14	0,1	0,2	0,14	0,29	0,43
Hollow Sand-lime brick <b>KS L 12 - 1,4</b>	0,21	0,1	0,2	0,21	0,43	0,64

CELO Multifunction frame plug MFR

**Performances**

Displacement for use in masonry, temperature  $\vartheta = 50/80$  °C

Annex C8



**Base material solid masonry: Autoclaved Aerated Concrete (AAC)**

**Table C9.1: Brick Data**

Description of brick		AAC
Type of brick		Autoclaved Aerated Concrete AAC
Bulk density $\rho \geq$	[kg/dm <sup>3</sup> ]	0,35
European Standard		EN 771-4:2011+A1:2015
Minimum thickness of member $h_{\min} =$	[mm]	100

Installation parameters see Annex B2

**Table C9.2: Characteristic resistance  $F_{Rk}$  [kN] in AAC**

Base material	Drill method		Characteristic resistance $F_{Rk}$ <sup>1)</sup>	
			$\vartheta = 24/40 \text{ °C}$	$\vartheta = 50/80 \text{ °C}$
<b>MFR 10 <math>h_{\text{nom}2} = 70 \text{ mm}</math></b>				
<b>AAC 2</b>	Hammer drilling	[kN]	<b>0,4</b>	<b>0,3</b>
<b>AAC 4</b>	Hammer drilling	[kN]	<b>1,2</b>	<b>0,9</b>
<b>AAC 6</b>	Hammer drilling	[kN]	<b>2,0</b>	<b>1,5</b>
<b>MFR 14</b>				
<b>AAC 2</b>	Hammer drilling	[kN]	<b>0,3</b>	<b>0,3</b>
<b>AAC 4</b>	Hammer drilling	[kN]	<b>1,2</b>	<b>1,2</b>
<b>AAC 6</b>	Hammer drilling	[kN]	<b>2,0</b>	<b>2,0</b>
Partial safety factor <sup>2)</sup>	$\gamma_{M,AAC}$	[-]	<b>2,0</b>	<b>2,0</b>

<sup>1)</sup> Characteristic resistance  $F_{Rk}$  for tension, shear or combined tension and shear loading

<sup>2)</sup> In absence of other national regulations

CELO Multifunction frame plug MFR

**Performances**

MFR 10/14 – Characteristic resistance for use in autoclaved aerated concrete

Annex C9

**Table C10: Displacements under tension and shear loading in AAC**

Base material	Temperature range	Tension load			Shear load		
		N [kN]	$\delta_{NO}$ [mm]	$\delta_{N\infty}$ [mm]	V [kN]	$\delta_{VO}$ [mm]	$\delta_{V\infty}$ [mm]
MFR 10 h <sub>nom2</sub> = 70 mm							
AAC 2	temperature $\vartheta = 24/40\text{ }^{\circ}\text{C}$	0,14	0,1	0,2	0,14	0,3	0,4
	temperature $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,11	0,1	0,2	0,11	0,2	0,3
AAC 4	temperature $\vartheta = 24/40\text{ }^{\circ}\text{C}$	0,43	0,1	0,2	0,43	0,9	1,3
	temperature $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,32	0,1	0,2	0,32	0,6	1,0
AAC 6	temperature $\vartheta = 24/40\text{ }^{\circ}\text{C}$	0,71	0,1	0,2	0,71	1,4	2,1
	temperature $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,54	0,1	0,2	0,54	1,1	1,6
MFR 14							
AAC 2	$\vartheta = 24/40\text{ }^{\circ}\text{C}$ and $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,11	0,1	0,2	0,11	0,2	0,3
AAC 4	$\vartheta = 24/40\text{ }^{\circ}\text{C}$ and $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,43	0,1	0,2	0,43	0,9	1,3
AAC 6	$\vartheta = 24/40\text{ }^{\circ}\text{C}$ and $\vartheta = 50/80\text{ }^{\circ}\text{C}$	0,71	0,1	0,2	0,71	1,4	2,1

CELO Multifunction frame plug MFR

**Performances**  
MFR 10/14 – Displacement for use in AAC under tension and shear load

Annex C10